




NEW WINFLEX TAC

T SERIES FOR CORROSIVE ATMOSPHERES

ADVANTAGES



HUB
PROTECTION

COVER
PROTECTION

STAINLESS
STEEL
BOLTS

PROTEKT
KL101





Delta PROTEKT KL101 Protection

Reinforced protection against corrosion

- >> Zinc flake basecoat
(8 to 12 μm layer)
- >> Environmentally friendly
(no heavy metals like Chrome IV used)
- >> High resistance to chemicals



NEW WINFLEX TAC - T SERIES ATMOSPHERE CORROSIVE

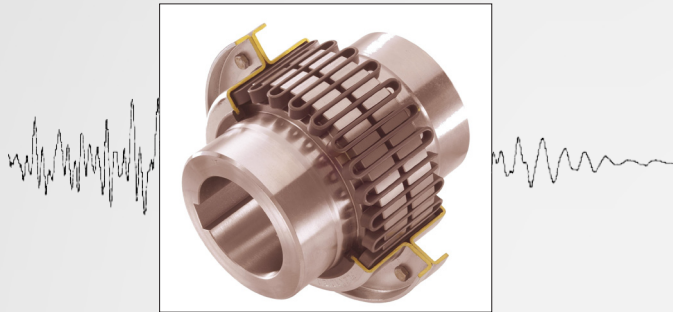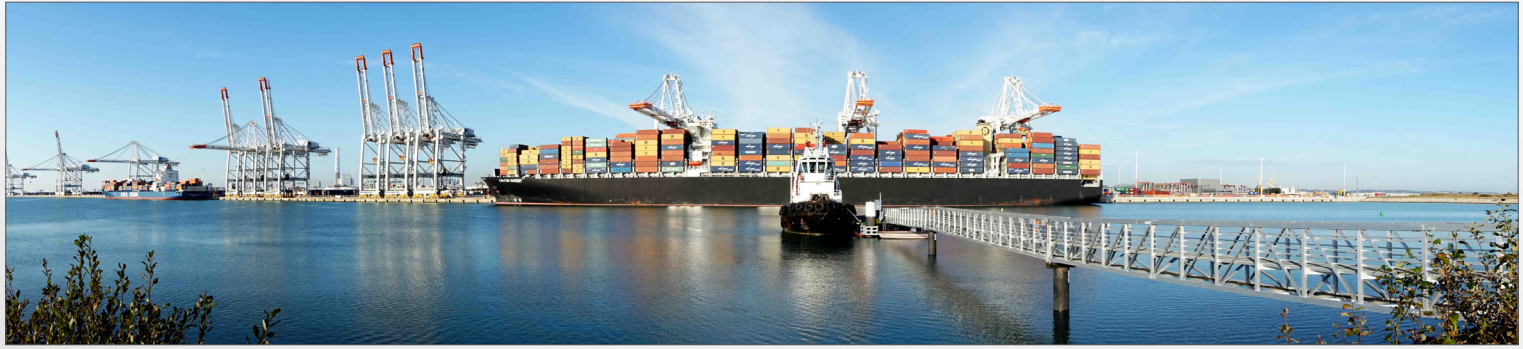


- >> Protection of bearings
- >> Over torque damping
- >> Shock load protection

SIZE		Z	000	00	0	1	2	5	9	16	28	43	70	95
Base torque (Nm)		90	190	380	950	1900	3800	8500	12500	24000	48000	70000	120000	160000
Am	Keyway	28	38	55	55	80	110	105	130	180	230	230	230	270
	Shrink fit	-	-	45	45	60	100	90	110	170	200	220	220	250
A rough bore		-	-	-	-	-	-	-	-	-	75	85	95	105
B**	T	50	60	60	60	80	80	110	110	130	155	180	200	230
	TL, TL2	-	-	-	110	110	110	170	195	195	225	260	280	300

OTHER COUPLINGS available according to steel industry standards (S45604-A)

Flexident Senior

Flexident Z

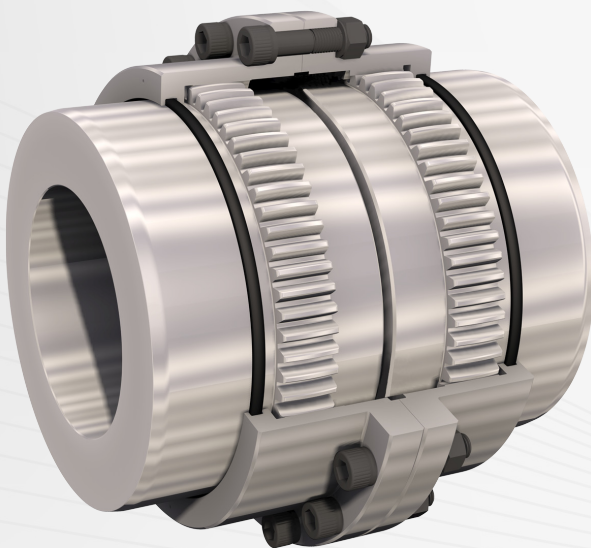

CONTACT: couplings@cmdgears.com www.cmd-couplings.com

