

***Orientalmotor***

Stepper Motors

# PKP Series

## Additions to the Product Line

5-Phase Standard Type

High-Resolution Type

Frame Size 28 mm

Frame Size 28 mm

Frame Size 42 mm

Frame Size 60 mm



## 2-Phase PKP Series with PLE Gearhead

- High Torque Combination Bipolar 2-phase Stepper Motors with Neugart Planetary Gearheads
- Motor and Gearhead are Pre-assembled













For detailed information please refer to the **PKP Series** catalogue on our website.



2-Phase

## Stepper Motors PKP Series High Torque Low Vibration

- Bipolar (4 lead wires) and unipolar (5 or 6 lead wires) wiring types are available.  
(For details on the wiring types, refer to page 10.)

Features / Product Line / System Configuration / How to Read Product Numbers / Product Line / Included Items / Specifications Table Glossary					P. 4 to 18
Motor Type	Motor Frame Size	Additional Function			Reference Page
		Standard	With Encoder	With Electromagnetic Brake	
<b>Standard Type</b> (Basic Step Angle: 1.8°/step) <div><div>Flat Connector</div><div>Reasonable</div><div>High Strength</div></div> <div></div> <div>Mini-Connector Type      Connector Type      With Encoder      With Electromagnetic Brake</div> <div>Standard</div>	□13 mm	COMING SOON	—	—	P. 19 to 61
	□20 mm	●	●	—	
	□28 mm	●	●	●	
	□35 mm	●	●	●	
	□42 mm	●	●	●	
	□56.4 mm	●	●	●	
	□60 mm*	●	—	—	
	□85 mm	●	—	—	
<b>High-Resolution Type</b> (Basic Step Angle: 0.9°/step) <div><div>Flat Connector</div><div>Reasonable</div><div>High Strength</div></div> <div></div> <div>Mini-Connector Type      Connector Type      With Encoder      With Electromagnetic Brake</div> <div>Standard</div>	□28 mm	●	●	—	P. 62 to 79
	□42 mm	●	●	●	
	□56.4 mm	●	●	●	
<b>Flat Type</b> (Basic Step Angle: 0.018° to 1.8°/step) <div></div> <div>Standard      With Harmonic Gears</div>	□42 mm	●	—	—	P. 80 to 83
	□60 mm	●	—	—	
	□51 mm	With Harmonic Gears			
	□61 mm	With Harmonic Gears			
<b>SH Geared Type</b> (Basic Step Angle: 0.05° to 0.5°/step) <div></div> <div>Standard</div>	□28 mm	●	—	—	P. 84 to 93
	□42 mm	●	—	—	
	□60 mm	●	—	—	
<b>CS Geared Type</b> (Basic Step Angle: 0.09 to 0.36°/step) <div></div> <div>Standard</div>	□28 mm	●	—	—	P. 94 to 99
	□42 mm	●	—	—	
	□60 mm	●	—	—	

●: 2 types are available—the "Mini-Connector Type" and the "Connector Type" Refer to page 5 for details.

\*This is the conventional **PK** Series.


General Specifications / Electromagnetic Brake Specifications / Encoder Part Specifications / Permissible Radial Load and Permissible Axial Load / Flat Type, Permissible Moment Load with Harmonic Gears / Flat Type, Accuracy with Harmonic Gears / Motor Inner Wiring Diagram and Rotation Direction

P. 100 to 103

COMING SOON

## 2-Phase PKP Series Standard Type Frame Size 13 mm

- Industry's smallest frame size of 13 mm (as of July 2022, according to a study by Oriental Motor)
- Mass of only 21 g
- Connector types that are easy to work with



Refer to page 19 for details.

5-Phase






## Stepper Motors PKP Series

High Accuracy

Low Vibration

Features / Product Line / System Configuration / How to Read Product Numbers / Types and Pricing / Included Items / Specifications Table Glossary

P. 104 to 110

Motor Type	Motor Frame Size	Additional Function			Reference Page
		Standard	With Encoder	With Electromagnetic Brake	
<b>Standard Type</b> (Basic Step Angle: 0.72°/step) Flat Connector Reasonable High Strength  Mini-Connector Type  Connector Type  With Encoder Standard	□20 mm*	●	●	—	P. 111 to 125
	□28 mm	●	NEW	—	
	□42 mm	●	●	—	
	□56.4 mm	●	●	—	
	□60 mm	●	●	—	
	□85 mm*	●	—	—	
<b>High-Resolution Type</b> (Basic Step Angle: 0.36°/step)  Standard	□ 28 mm	NEW	NEW	—	P. 126 to 133
	□42 mm	●	NEW	—	
	□60 mm	●	NEW	—	
<b>TS Geared Type</b> (Basic Step Angle: 0.024 to 0.2°/step)  Standard	□42 mm	●	—	—	P. 134 to 135
	□60 mm	●	—	—	

●: 2 types are available—the "Mini-Connector Type" and the "Connector Type" Refer to page 5 for details.

General Specifications / Encoder Part Specifications / Motor Pin Arrangement / Rotation Direction / Permissible Radial Load and Permissible Axial Load

P. 136 to 137








2-Phase

5-Phase

## Driver for Stepper Motors

Compact


Low Vibration

Driver Types and Features		P. 138
Bipolar Driver for 2-Phase Stepper Motors Driver for 5-Phase Stepper Motors <b>CVD Series—Pulse Input Type</b>	 Right Angle with Installation Plate  With Installation Plate  Without Installation Plate	P. 139 to 145
Bipolar Driver for 2-Phase Stepper Motors Driver for 5-Phase Stepper Motors <b>CVD Series RS-485 Communication Type</b>	 Right Angle with Installation Plate  With Installation Plate	P. 146 to 151
Bipolar Driver for 2-Phase/5-Phase Stepper Motors <b>CVD Series S Type</b> Driver for 5-Phase Stepper Motors <b>CVD Series SC Type</b> Unipolar Driver for 2-Phase Stepper Motors	●CVD Series S Type  S Type  SC Type · SPI Communication-Compatible · Pulse Input-Compatible	P. 138
Cables		P. 152 to 163
Peripheral Equipment		P. 164

# 2-Phase Stepper Motors

## PKP Series

● For detailed information about regulations and standards, please see the Oriental Motor website.

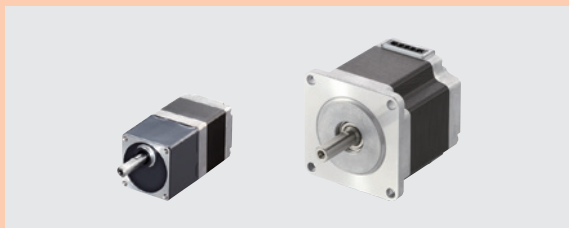

### Introducing our Video Library

Videos presenting the features, operations, and methods of use, etc. of the **PKP** Series are available on the Oriental Motor website.

These products are high-torque 2-phase stepper motors. A wide variety of products are available to meet your design specifications.


- Motor Frame Size 13 mm to 85 mm
- Standard Type with a Resolution of 200 Steps per Revolution (Basic step angle: 1.8°/step)
- High-Resolution Type with a Resolution of 400 Steps per Revolution (Basic step angle: 0.9°/step)
- Oriental Motor's Flattest Type of 2-phase Stepper Motor
- High-Torque and High-Resolution **SH** Geared Type
- Bipolar (4 lead wires) and Unipolar (5 or 6 lead wires) are Available
- Encoder Type and Electromagnetic Brake Type are Available
- Many Motor Current Specifications Available

## Features

### Increased Torque over the Entire Speed Range from Low to High


After revising the magnetic design and structure design of the **PKP** Series, it produces much more torque than standard **PK** Series motors of the same size. In addition, torque can be increased in the high-speed range by using high current motors.

#### Comparison of Speed – Torque Characteristics of the Same Size Motors

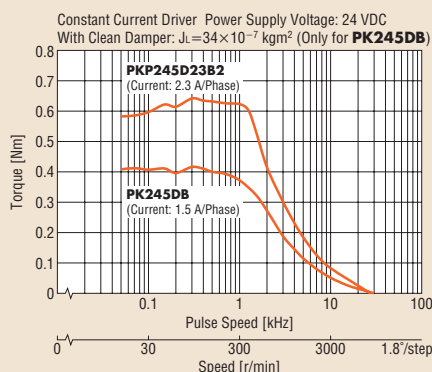

High current is possible due to the revised motor winding design and the highly efficient design of the drive circuit that can be combined. Increased torque over the entire speed range from low to high is achieved.


#### Comparison of Maximum Holding Torque

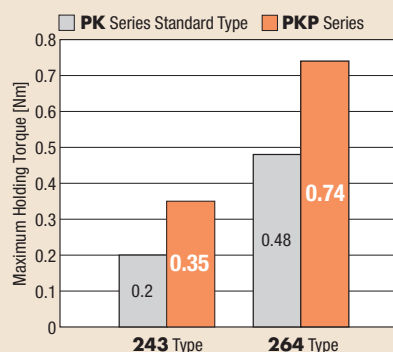


## Conservation of Energy and Electrical Power

Reducing the running current supplied to **PKP** Motors achieves the same torque as conventional products while reducing power consumption and CO<sub>2</sub> emissions.

#### Reduced Running Current with the PKP Series

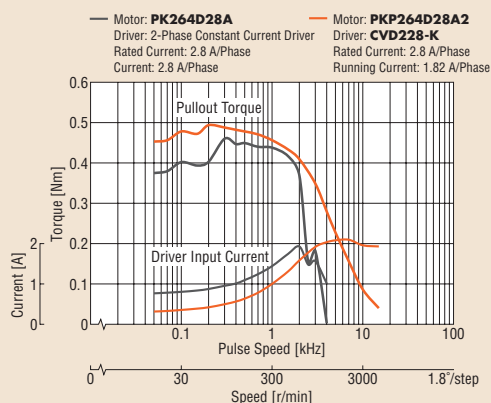

#### Power Consumption and CO<sub>2</sub> Emissions 56% Lower than Conventional Oriental Motor Products

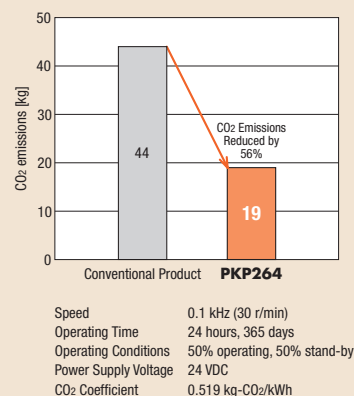




## Compact and Flat Connector

The **PKP** Series uses a compact flat connector, which shortens the length of the connector's overhang. In addition, the degree of freedom for the cable outlet direction has been increased, because the outlet direction points upward.

- Because the connector is provided for select products only, refer to the dimensions of each model for details.




## Saving Resources through Downsizing

Use a **PKP** Series motor in place of a standard motor from the **PK** Series with the equivalent torque in order to downsize motors.


**Volume reduced by 44%**

Comparison of Torque Characteristics of **PKP244U12A2** and **PK264-02A**

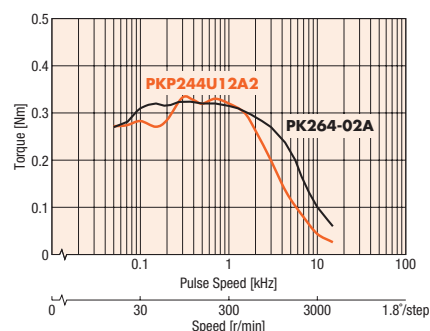


## Lower Vibration

Revising the magnetic design has achieved lower vibration than with conventional products.

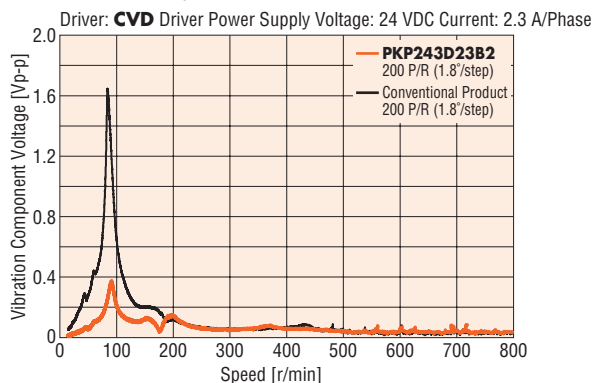

**Downsizing is Possible with the Same Torque!**

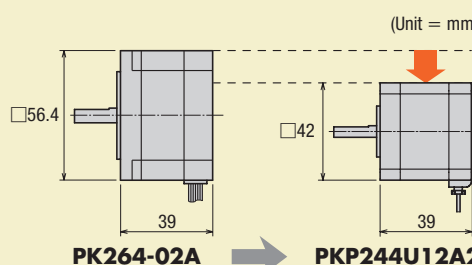


## Select Motors by Price, Specifications and Characteristics

The Mini-Connector Type and Connector Type are available in some Standard Type and High-Resolution Type product lines. You can choose according to price and your desired specifications and characteristics.

### ● Comparison of the Mini-Connector Type and the Connector Type For 2-Phase Stepper Motors

Type	Mini-Connector Type	Connector Type	
Prices			
Features	<ul style="list-style-type: none"><li>• Using a compact flat connector shortens the length of the connector's overhang</li><li>• High permissible radial load/ permissible axial load</li><li>• High torque (excluding some types)</li></ul>	Reasonable prices	
Permissible Radial Load (Max. value)	<div><div>□42 mm</div><div>□56.4 mm</div></div>	<div><div>85 N</div><div>270 N</div></div> <div><div>63% Increase</div><div>68% Increase</div></div>	<div>52 N</div> <div>160 N</div>
Permissible Axial Load	<div><div>□42 mm</div><div>□56.4 mm</div></div>	<div><div>15 N</div><div>30 N</div></div> <div><div>50% Increase</div></div>	<div>10 N</div> <div>20 N</div>


◆ Example of comparison of Torque characteristics with the same size motor (□42 mm bipolar)

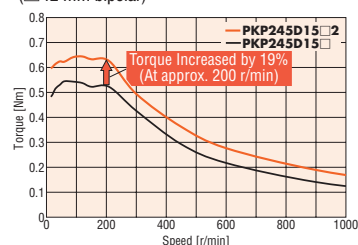

### ● Permissible Radial Load Increased

By increasing the permissible radial load, the Mini-Connector Type make assembling equipment easier.

◇ Applications  
Belt and Pulley Mechanism



◇ Advantages

- The components for avoiding the concentration of the radial load on the shaft are no longer needed, making it easier to reduce the size of the equipment.
- It is easy to adjust belt tension to obtain a higher safety factor in the tension of the belt.

### ● Increased Torque

The torque characteristics of the Mini-Connector Type is equal to or higher than those of the Connector Type (excluding some types). Reduced positioning time is achieved by increasing torque.

2-Phase Motors  
**PKP**

Features  
Product Line

Product Number  
Product Line

Standard Type

High-Resolution Type

Flat Type

**SH** Geared Type

**CS** Geared Type

Common Specifications

Inner Wiring of Motor

5-Phase Motors  
**PKP**

Features  
Product Line

Product Number  
Product Line

Standard Type

High-Resolution Type

**TS** Geared Type

Common Specifications

Motor Pin Arrangement

Drivers for 2-Phase/5-Phase Motors

Cables


Peripheral Equipment

# High-Resolution Type

This is a high-resolution stepper motor with a basic step angle of 0.9°. Stopping accuracy is improved.

## Increased Resolution (Compared to standard type)

The number of rotor teeth has doubled to 100, compared to 50 with the standard type. As a result, the basic step angle is 0.9°/step, which is half than the standard type.

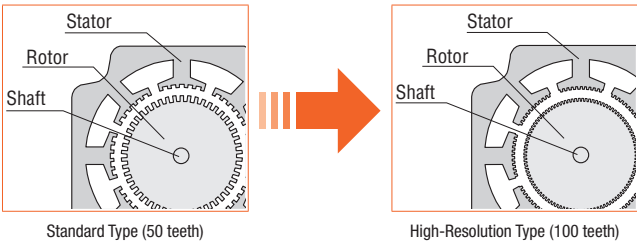

## Avoidance of Resonance Regions


If the pulse speed is within a resonance region, vibration may increase. Resonance regions can be avoided by switching to a high-resolution type.

## Improved Stopping Accuracy

Compared with the standard type (basic step angle 1.8°), the displacement angle of the motor is smaller than the frictional load applied to the motor.


The stopping accuracy in applications that constantly apply a frictional load, such as a ball screw mechanism, is therefore improved.

### Comparison of Angles and Torque Characteristics\* (Reference value)

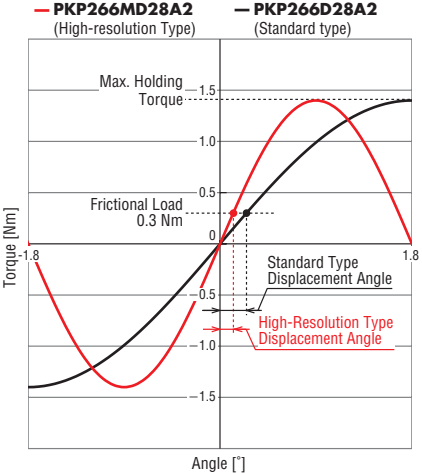

\*For frictional load 0.3 Nm


### Comparison of Displacement Angles by Frictional Load\* (Reference value)

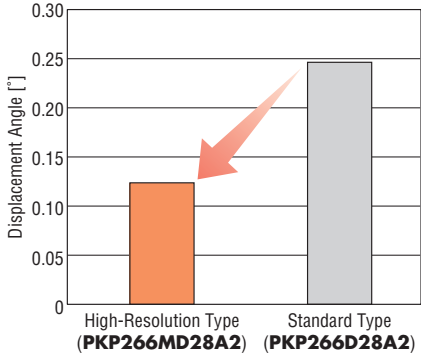

\*For frictional load 0.3 Nm

### Example of Mechanism where a Constant Frictional Load is Applied

For example, in a ball screw mechanism, as the one shown in the figure, a frictional load is constantly applied to the motor by the guide block and guide rail, etc.




# Flat Type

This is Oriental Motor's flattest type of 2-phase stepper motors.

## Flat and Lightweight Design

The motor can be installed in a narrow space.

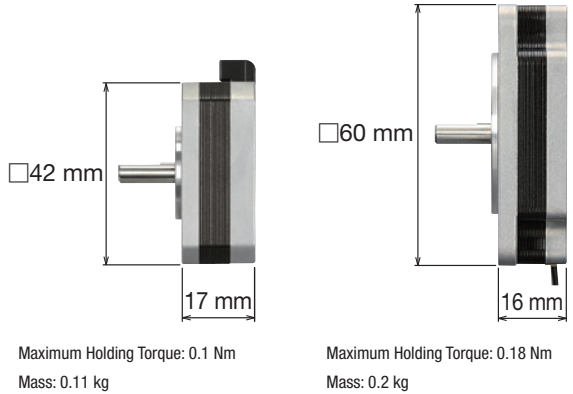

## With Harmonic Gears

Attach the load to the surface of the flange to fix the load.


Example: Frame Size 51 mm



Gear Ratio 100  
Maximum Holding Torque: 2.4 Nm  
Mass: 0.32 kg

Makes drives with large inertia possible.

Example: Frame Size 51 mm



Inertia 0.12 kg·m²  
(Approximately 7 times the rotor inertia)  
Inertial Load: Diameter 0.35 m,  
Thickness 0.01 m  
Mass 7.6 kg, Material Iron  
Motor: Length 17 mm  
Gear Ratio 100

## Features of Geared Types

Using a geared type motor can provide advantages such as deceleration, high torque, and high resolution.


### ● Differentiating Features of the CS Geared Type and the SH Geared Type

Type		CS Geared Type	SH Geared Type
Features		<ul style="list-style-type: none"> <li>Center Shaft Configuration</li> <li>High Torque</li> <li>High Permissible Radial Load</li> </ul>	<ul style="list-style-type: none"> <li>Wide Variety</li> <li>90 mm Frame Size and Unipolar Wiring</li> <li>Includes Encoder</li> <li>Many Gear Ratio Types</li> </ul>
Frame Size	28 mm	Maximum Holding Torque [Nm]	0.4 - 0.8
		Speed Range (Max. value) [r/min]	300 - 600
		Permissible Radial Load (Max. value) [N]	73
	42 mm	Maximum Holding Torque [Nm]	0.5 - 2
		Speed Range (Max. value) [r/min]	150 - 600
		Permissible Radial Load (Max. value) [N]	96
	60 mm	Maximum Holding Torque [Nm]	1.3 - 4.5
		Speed Range (Max. value) [r/min]	150 - 600
		Permissible Radial Load (Max. value) [N]	260

### ● Achieves Increased Torque with the Same Motor Frame Size

Switching to a geared type motor increases torque without changing the motor frame size.

This is effective when installation is not possible because the motor installation space is limited.

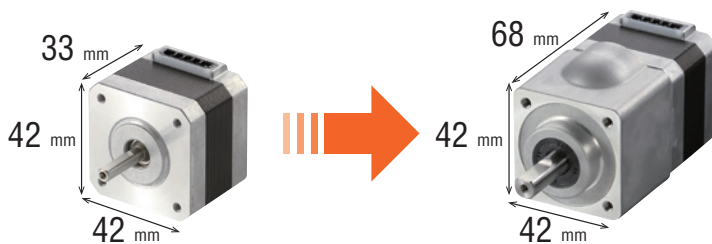

Standard Type	Motor Type	CS Geared Type
PKP243D15A2	Product Name	PKP243D15A2-CS20
0.35 Nm	Max. Holding Torque	2 Nm


## CS Geared Type

The geared type with center shaft addresses torque, shaft load capacity and installation demands.


### ● Increased shaft load capacity reduces assembly time

Increased permissible radial load and permissible axial load can reduce assembly time.

#### ◇ Permissible Radial Load and Permissible Axial Load

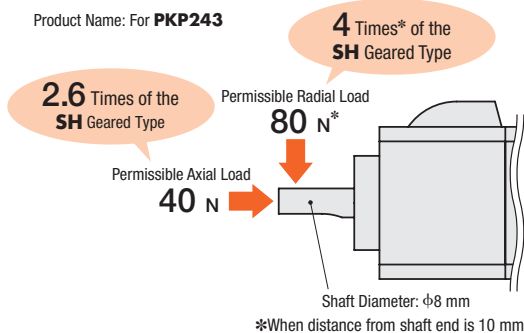

#### ◇ Applications Belt and Pulley Mechanism



#### ◇ Advantages


- Reduce adjustments during assembly because belt tension can be higher than with conventional products
- The components for avoiding the concentration of the radial load on the shaft are no longer needed
- The degree of freedom in pulley selection is increased

- Motor Frame Size
- 13 mm
  - 20 mm
  - 28 mm
  - 35 mm
  - 42 mm
  - 50 mm
  - 51 mm
  - 56.4 mm
  - 60 mm
  - 61 mm
  - 85 mm
  - 90 mm

● **Increase Torque Contributes to Reduced Size and Weight of the Motor**  
 High torque, shorter motor length and a frame size that's one size smaller.


◇ **Dimensions:** (Unit = mm)

**CS Geared Type (PKP243D15A2-CS20)**




Maximum Holding Torque: Same  
 Frame Size: **Reduced by 18 mm**  
 Motor Length: **Reduced by 10.5 mm**  
 Mass: **Reduced by 47 %**

**SH Geared Type (PKP264D14A2-SG7.2)**




◇ **Torque Characteristics Comparison**

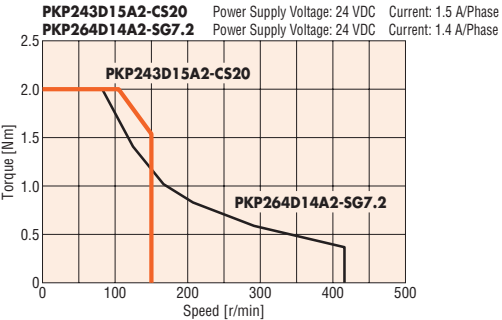

● **Center Shaft Makes Designing Easier**


A review of the gear structure has led to the center shaft. It is easier to design the installation plate.  
 In addition, the degree of freedom for the cable outlet direction has been increased.

● **Output Shaft now Placed in Center**

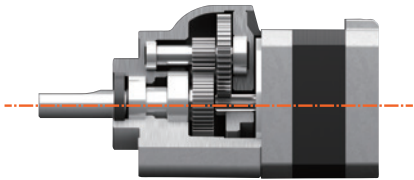


Internal Gearhead Structure Figure

● **Installation Plate Designing Made Easier**

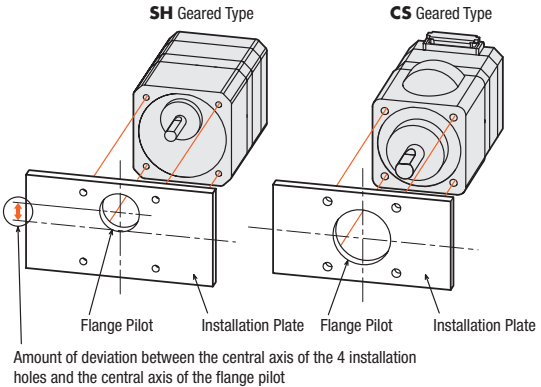



● **Increased Degree of Freedom for Cable Outlet Direction**

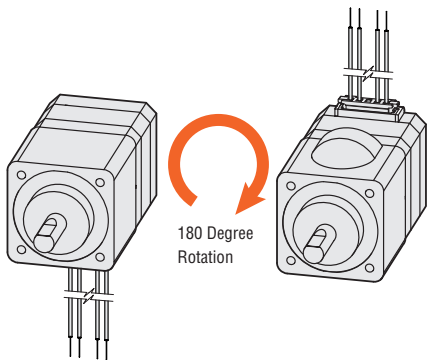

## SH Geared Type

This type is well-suited for deceleration, increased torque, high resolution, and limited vibration.  
 It experiences less backlash than conventional products.

● **Wider Speed Range makes it Easier to Use than Conventional Products**

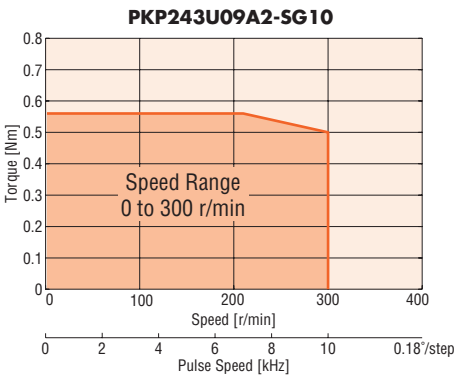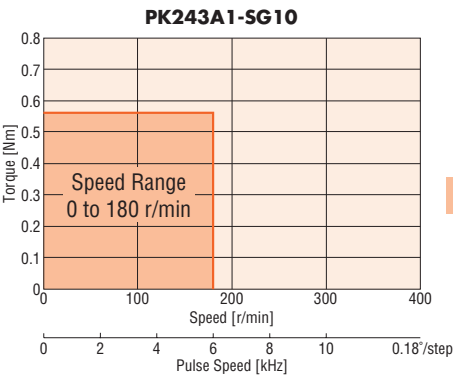





# Combined Drivers (Sold separately) → Page 138

These are compact and lightweight bipolar and unipolar drivers.

## Bipolar Driver CVD Series

The **CVD** Series offers the pulse input type and the RS-485 communication type drivers.


- Right Angle Type with Installation Plate  
The connector points outward.



- With Installation Plate  
The connector points upward.



- Without Installation Plate\*  
The connector points upward.




\*Pulse input type only

## Bipolar Driver CVD Series S Type



· SPI Communication-Compatible



· Pulse Input-Compatible

## Product Line

Motor Product Line (Basic Step Angle)		Frame Size, Wiring Type															
		13 mm		20 mm		28 mm		35 mm		42 mm		56.4 mm		60 mm		85 mm	
		Bipolar	Unipolar	Bipolar	Unipolar	Bipolar	Unipolar	Bipolar	Unipolar	Bipolar	Unipolar	Bipolar	Unipolar	Bipolar	Unipolar	Bipolar	Unipolar
Standard Type (1.8°)		●	—	○	○	●	●	●	●	●	●	●	●	○*3	○*3	○	○
	With Encoder*4	—	—	○	—	●	—	●	—	●	—	●	—	—	—	—	—
	With Electromagnetic Brake	—	—	—	—	●	●	●	●	●	●	●	●	—	—	—	—
High-Resolution Type (0.9°)		—	—	—	—	●	●	—	—	●	●	●	●	—	—	—	—
	With Encoder*4	—	—	—	—	●	—	—	—	●	—	●	—	—	—	—	—
	With Electromagnetic Brake	—	—	—	—	—	—	—	—	●	●	●	●	—	—	—	—
Flat Type (0.018° to 1.8°)		—	—	—	—	—	—	—	—	●	—	—	—	○	—	—	—
	With Harmonic Gears	—	—	—	—	—	—	—	—	●*1	—	—	—	○*2	—	—	—
SH Geared Type (0.05° to 0.5°)		—	—	—	—	●	●	—	—	●	●	—	—	●	●	—	—
		—	—	—	—	●	●	—	—	●	—	—	—	●	—	—	—
CS Geared Type (0.09° to 0.36°)		—	—	—	—	●	●	—	—	●	—	—	—	●	—	—	—
		—	—	—	—	●	●	—	—	●	—	—	—	●	—	—	—

●: Connector Connection Method ○: Lead Wire Type

\*1 Flat Type - 51 mm with Harmonic Gears.

\*2 Flat Type - 61 mm with Harmonic Gears.


\*3 This is the conventional **PK** Series.

\*4 Unipolar with encoder is also available. For details, please contact your nearest Oriental Motor sales office.

# System Configuration

## Combination of the 2-Phase Stepper Motor PKP Series and the CVD Series Pulse Input Type Driver

An example of a system configuration using a host control device (with built-in pulse generator function) is shown below. Motors, drivers, and connection cables must be ordered individually.

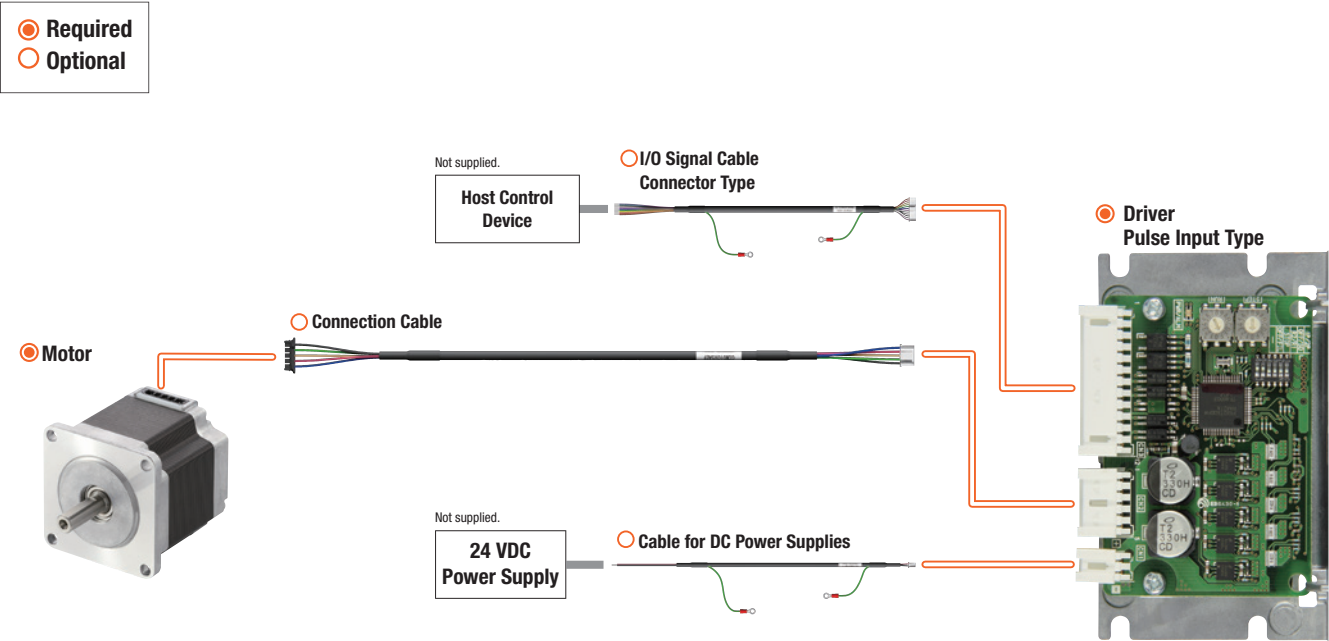

### Example of System Configuration

Motor	+	Driver	+	Cables		
				Connection Cable (1 m)	Cable for I/O Signal (1 m)	Cable for DC Power Supplies (1 m)
PKP264D28B2		CVD228BR-K		CCM010V2AEF	CC12D010-2	CC02D010-2

The system configuration shown above is an example. Other combinations are also available.

2-Phase Motors PKP
Features Product Line
Product Number Product Line
Standard Type
High-Resolution Type
Flat Type
SH Geared Type
CS Geared Type
Common Specifications
Inner Wiring of Motor
5-Phase Motors PKP
Features Product Line
Product Number Product Line
Standard Type
High-Resolution Type
TS Geared Type
Common Specifications
Motor Pin Arrangement
Drivers for 2-Phase/5-Phase Motors
Cables
Peripheral Equipment

□13 mm

- 20 mm

□ 28 mm



□ 42 mm

□ 50 mm

□ 51 mm

56.4 mm

60 mm

□ 61 mm

□ 85 mm

□ 90 mm



**○ Connection Cable**

**Driver**  
**RS-485 Communication Type**

**Note**

The connectors to connect the power supply, motor, I/O signals, and RS-485 communication are not included with the driver.

Customers may either request the separately-sold cables or make separate arrangements for connectors.

Check the connector part numbers on page 147 or in the Operating Manual.

## +



● The system configuration shown above is an example. Other combinations are also available.



## Product Number

### Motor

#### PKP Series

◇ Standard Type/Standard Type with an Electromagnetic Brake  
High-Resolution Type/High-Resolution Type with an  
Electromagnetic Brake

**PKP 2 6 4 M D 28 A 2**

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

①	Series Name	<b>PKP: PKP Series</b>					
②	2: 2-Phase						
③	Motor Frame Size	<b>0:</b> 13 mm <b>1:</b> 20 mm <b>2:</b> 28 mm <b>3:</b> 35 mm <b>4:</b> 42 mm <b>6:</b> 56.4 mm <b>9:</b> 85 mm					
④	Motor Case Length						
⑤	Motor Type	Blank: Standard Type <b>M:</b> High-Resolution Type					
⑥	Number of Lead Wires	<b>D:</b> 4 Leads <b>U:</b> 5 or 6 Leads					
⑦	Motor Winding Specifications						
⑧	Configuration	<b>A:</b> Single Shaft <b>B:</b> Double Shaft <b>M:</b> With Electromagnetic Brake					
⑨	Reference Number						

● Some products with a shaft diameter of  $\phi 6.35$  mm are also available. For details, please contact your nearest Oriental Motor sales office.

◇ Standard Type with Encoder/High-Resolution Type with  
Encoder

**PKP 2 4 3 M D 15 A 2-R3F L**

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪

①	Series Name	<b>PKP: PKP Series</b>					
②	2: 2-Phase						
③	Motor Frame Size	<b>1:</b> 20 mm <b>2:</b> 28 mm <b>3:</b> 35 mm <b>4:</b> 42 mm <b>6:</b> 56.4 mm					
④	Motor Case Length						
⑤	Motor Type	Blank: Standard Type <b>M:</b> High-Resolution Type					
⑥	Number of Lead Wires	<b>D:</b> 4 Leads					
⑦	Motor Winding Specifications						
⑧	Configuration	<b>A:</b> Single Shaft					
⑨	Reference Number						
⑩	Encoder Resolution	<b>R3E:</b> 200 P/R <b>R3F:</b> 400 P/R <b>R3J:</b> 1000 P/R					
⑪	Encoder Output Circuit Type	Blank: Voltage Output <b>L:</b> Line Driver Output					

◇ Flat Type

**PKP 2 4 2 D 23 A 2**

① ② ③ ④ ⑥ ⑦ ⑧ ⑩

**PKP 2 6 2 F D 15 A W**

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

◇ Flat Type with Harmonic Gears

**PKP 2 4 2 D 23 A 2 - H 100**

① ② ③ ④ ⑥ ⑦ ⑧ ⑩ ⑪ ⑫

**PKP 2 6 2 F D 15 A W - H 100 S**

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑪ ⑫ ⑬

①	Series Name	<b>PKP: PKP Series</b>					
②	2: 2-Phase						
③	Motor Frame Size	<b>4:</b> 42 mm (The type with harmonic gears is 51 mm) <b>6:</b> 60 mm (The type with harmonic gears is 61 mm)					
④	Motor Case Length						
⑤	Motor Classification	<b>F:</b> Motor Frame Size 60 mm					
⑥	Number of Lead Wires	<b>D:</b> 4 Leads					
⑦	Motor Winding Specifications						
⑧	Configuration	<b>A:</b> Single Shaft					
⑨	Cable Identification	Blank: Connector Coupled Type <b>W:</b> Lead Wire Type					
⑩	Reference Number						
⑪	Geared Type	Blank: Flat Type <b>H:</b> Flat Type with Harmonic Gears					
⑫	Gear Ratio						
⑬	Gear Type						

2-Phase  
Motors  
**PKP**

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

Flat  
Type

**SH** Geared  
Type

**CS** Geared  
Type

Common  
Specifications

Inner  
Wiring  
of Motor

5-Phase  
Motors  
**PKP**

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

**TS** Geared  
Type

Common  
Specifications

Motor  
Pin  
Arrangement

Drivers for  
2-Phase/5-Phase  
Motors

Cables

Peripheral  
Equipment

Motor Frame Size

13 mm

20 mm

28 mm

35 mm

42 mm

50 mm  
51 mm

56.4 mm

60 mm  
61 mm

85 mm  
90 mm

◇ SH, CS Geared Type

PKP

2

4

3

D

09

B

2

-

SG

18

①

②

③

④

⑤

⑥

⑦

⑧

⑨

⑩

PK Series

◇ Standard Type

PK

2

6

4

J

D

B

①

②

③

④

⑤

⑥

⑦

● Driver

Refer to page 138 for details on drivers.

● Connection Cable

◇ Motor Connection Cable

LC

2

B

06

A

①

②

③

④

⑤

①	Cables	<b>LC</b> : Connector Leads
②	<b>2</b> : 2-Phase	
③	Cable Type	<b>B</b> : For Bipolar <b>U</b> : For Unipolar
④	Cable Length	<b>06</b> : 0.6 m <b>10</b> : 1 m
⑤	Reference Number	

◇ Electromagnetic Brake Connection Cable

LC

M

02

A

-

006

①

②

③

④

⑤

①	Cables	<b>LC</b> : Connector Leads
②	Cable Type	<b>M</b> : For Electromagnetic Brake
③	Number of Lead Wires	
④	Reference Number	
⑤	Cable Length	<b>006</b> : 0.6 m <b>010</b> : 1 m

①	Series Name	<b>PKP</b> : PKP Series
②	<b>2</b> : 2-Phase	
③	Motor Frame Size	<b>2</b> : 28 mm <b>4</b> : 42 mm <b>6</b> : 60 mm
④	Motor Case Length	
⑤	Number of Lead Wires	<b>D</b> : 4 Leads <b>U</b> : 5 or 6 Leads
⑥	Motor Winding Specifications	
⑦	Configuration	<b>A</b> : Single Shaft <b>B</b> : Double Shaft
⑧	Reference Number	
⑨	Geared Type	<b>SG</b> : <b>SH</b> Geared Type <b>CS</b> : <b>CS</b> Geared Type
⑩	Gear Ratio	

①	Series Name	<b>PK</b> : PK Series
②	<b>2</b> : 2-Phase	
③	Motor Frame Size	<b>6</b> : 60 mm
④	Motor Case Length	
⑤	Motor Type	<b>J</b> : High-Torque Type
⑥	Number of Lead Wires	Blank: 6 Leads <b>D</b> : 4 Leads
⑦	Configuration	<b>A</b> : Single Shaft <b>B</b> : Double Shaft

◇ Encoder Connection Cable

LC

E

08

A

-

006

①

②

③

④

⑤

①	Cables	<b>LC</b> : Connector Leads
②	Cable Type	<b>E</b> : For Encoder
③	Applicable Model	<b>05</b> : For Voltage Output <b>08</b> : For Line Driver Output
④	Reference Number	
⑤	Cable Length	<b>006</b> : 0.6 m

## Product Line

A connector-coupled motor requires a connection cable. Motors, drivers, and connection cables must be ordered individually. Refer to page 138 for details on drivers, and refer to page 152 for details on connection cables.

### ● Motor

#### ◇ Standard Type

##### ● Bipolar (4 lead wires)

Product Name (Single Shaft)	Product Name (Double Shaft)
<b>PKP203D06A</b>	<b>PKP203D06B</b>
<b>PKP213D05A</b>	<b>PKP213D05B</b>
<b>PKP214D06A</b>	<b>PKP214D06B</b>
<b>PKP223D15A2</b>	<b>PKP223D15B2</b>
<b>PKP225D15A2</b>	<b>PKP225D15B2</b>
<b>PKP233D15A</b>	<b>PKP233D15B</b>
<b>PKP233D23A</b>	<b>PKP233D23B</b>
<b>PKP235D15A</b>	<b>PKP235D15B</b>
<b>PKP235D23A</b>	<b>PKP235D23B</b>
<b>PKP243D08A2</b>	<b>PKP243D08B2</b>
<b>PKP243D15A2</b>	<b>PKP243D15B2</b>
<b>PKP243D15A</b>	<b>PKP243D15B</b>
<b>PKP243D23A2</b>	<b>PKP243D23B2</b>
<b>PKP243D23A</b>	<b>PKP243D23B</b>
<b>PKP244D08A2</b>	<b>PKP244D08B2</b>
<b>PKP244D15A2</b>	<b>PKP244D15B2</b>
<b>PKP244D15A</b>	<b>PKP244D15B</b>
<b>PKP244D23A2</b>	<b>PKP244D23B2</b>
<b>PKP244D23A</b>	<b>PKP244D23B</b>
<b>PKP245D08A2</b>	<b>PKP245D08B2</b>
<b>PKP245D15A2</b>	<b>PKP245D15B2</b>
<b>PKP245D15A</b>	<b>PKP245D15B</b>
<b>PKP245D23A2</b>	<b>PKP245D23B2</b>
<b>PKP245D23A</b>	<b>PKP245D23B</b>
<b>PKP246D15A2</b>	<b>PKP246D15B2</b>
<b>PKP246D15A</b>	<b>PKP246D15B</b>
<b>PKP246D23A2</b>	<b>PKP246D23B2</b>
<b>PKP246D23A</b>	<b>PKP246D23B</b>
<b>PKP264D14A2</b>	<b>PKP264D14B2</b>
<b>PKP264D28A2</b>	<b>PKP264D28B2</b>
<b>PKP264D28A</b>	<b>PKP264D28B</b>
<b>PKP264D42A2</b>	<b>PKP264D42B2</b>
<b>PKP266D14A2</b>	<b>PKP266D14B2</b>
<b>PKP266D28A2</b>	<b>PKP266D28B2</b>
<b>PKP266D28A</b>	<b>PKP266D28B</b>
<b>PKP266D42A2</b>	<b>PKP266D42B2</b>
<b>PKP268D14A2</b>	<b>PKP268D14B2</b>
<b>PKP268D28A2</b>	<b>PKP268D28B2</b>
<b>PKP268D28A</b>	<b>PKP268D28B</b>
<b>PKP268D42A2</b>	<b>PKP268D42B2</b>
<b>PK264JDA</b>	<b>PK264JDB</b>
<b>PK266JDA</b>	<b>PK266JDB</b>
<b>PK267JDA</b>	<b>PK267JDB</b>
<b>PK269JDA</b>	<b>PK269JDB</b>
<b>PKP296D45A</b>	<b>PKP296D45B</b>
<b>PKP296D63A</b>	<b>PKP296D63B</b>
<b>PKP299D45A</b>	<b>PKP299D45B</b>
<b>PKP299D63A</b>	<b>PKP299D63B</b>
<b>PKP2913D45A</b>	<b>PKP2913D45B</b>
<b>PKP2913D56A</b>	<b>PKP2913D56B</b>

\*For details, please contact your nearest Oriental Motor sales office.

##### ● Unipolar (5 or 6 lead wires)

Product Name (Single Shaft)	Product Name (Double Shaft)
<b>PKP213U05A</b>	<b>PKP213U05B</b>
<b>PKP214U06A</b>	<b>PKP214U06B</b>
<b>PKP223U09A2</b>	<b>PKP223U09B2</b>
<b>PKP225U09A2</b>	<b>PKP225U09B2</b>
<b>PKP233U12A</b>	<b>PKP233U12B</b>
<b>PKP235U12A</b>	<b>PKP235U12B</b>
<b>PKP243U04A</b>	<b>PKP243U04B</b>
<b>PKP243U06A</b>	<b>PKP243U06B</b>
<b>PKP243U08A2</b>	<b>PKP243U08B2</b>
<b>PKP243U09A2</b>	<b>PKP243U09B2</b>
<b>PKP243U09A</b>	<b>PKP243U09B</b>
<b>PKP243U12A2</b>	<b>PKP243U12B2</b>
<b>PKP244U04A</b>	<b>PKP244U04B</b>
<b>PKP244U08A2</b>	<b>PKP244U08B2</b>
<b>PKP244U08A</b>	<b>PKP244U08B</b>
<b>PKP244U12A2</b>	<b>PKP244U12B2</b>
<b>PKP244U12A</b>	<b>PKP244U12B</b>
<b>PKP245U05A</b>	<b>PKP245U05B</b>
<b>PKP245U08A2</b>	<b>PKP245U08B2</b>
<b>PKP245U08A</b>	<b>PKP245U08B</b>
<b>PKP245U12A2</b>	<b>PKP245U12B2</b>
<b>PKP245U12A</b>	<b>PKP245U12B</b>
<b>PKP246U12A2</b>	<b>PKP246U12B2</b>
<b>PKP246U12A</b>	<b>PKP246U12B</b>
<b>PKP246U16A2</b>	<b>PKP246U16B2</b>
<b>PKP264U10A2</b>	<b>PKP264U10B2</b>
<b>PKP264U10A</b>	<b>PKP264U10B</b>
<b>PKP264U20A2</b>	<b>PKP264U20B2</b>
<b>PKP264U20A</b>	<b>PKP264U20B</b>
<b>PKP264U30A</b>	<b>PKP264U30B</b>
<b>PKP266U10A2</b>	<b>PKP266U10B2</b>
<b>PKP266U10A</b>	<b>PKP266U10B</b>
<b>PKP266U20A2</b>	<b>PKP266U20B2</b>
<b>PKP266U20A</b>	<b>PKP266U20B</b>
<b>PKP266U30A</b>	<b>PKP266U30B</b>
<b>PKP268U10A2</b>	<b>PKP268U10B2</b>
<b>PKP268U10A</b>	<b>PKP268U10B</b>
<b>PKP268U20A2</b>	<b>PKP268U20B2</b>
<b>PKP268U20A</b>	<b>PKP268U20B</b>
<b>PKP268U30A</b>	<b>PKP268U30B</b>
<b>PK264JA</b>	<b>PK264JB</b>
<b>PK266JA</b>	<b>PK266JB</b>
<b>PK267JA</b>	<b>PK267JB</b>
<b>PK269JA</b>	<b>PK269JB</b>
<b>PKP296U20A</b>	<b>PKP296U20B</b>
<b>PKP296U30A</b>	<b>PKP296U30B</b>
<b>PKP296U45A</b>	<b>PKP296U45B</b>
<b>PKP299U20A</b>	<b>PKP299U20B</b>
<b>PKP299U30A</b>	<b>PKP299U30B</b>
<b>PKP299U45A</b>	<b>PKP299U45B</b>
<b>PKP2913U20A</b>	<b>PKP2913U20B</b>
<b>PKP2913U40A</b>	<b>PKP2913U40B</b>

## 2-Phase Motors PKP

### Features Product Line

### Product Number Product Line

### Standard Type

### High-Resolution Type

### Flat Type

### SH Geared Type

### CS Geared Type

### Common Specifications

### Inner Wiring of Motor

## 5-Phase Motors PKP

### Features Product Line

### Product Number Product Line

### Standard Type

### High-Resolution Type

### T5 Geared Type

### Common Specifications

### Motor Pin Arrangement

## Drivers for 2-Phase/5-Phase Motors

## Cables

## Peripheral Equipment

Motor Frame Size
□13 mm
□20 mm
□28 mm
□35 mm
□42 mm
□50 mm □51 mm
□56.4 mm
□60 mm □61 mm
□85 mm □90 mm

- ◇ Standard Type with Encoder
- Bipolar (4 lead wires)

Product Name
PKP213D05A-R3□■
PKP214D06A-R3□■
PKP223D15A2-R3□■
PKP225D15A2-R3□■
PKP233D15A-R3□■
PKP233D23A-R3□■
PKP235D15A-R3□■
PKP235D23A-R3□■
PKP243D08A2-R3□■
PKP243D15A2-R3□■
PKP243D23A2-R3□■
PKP244D08A2-R3□■
PKP244D15A2-R3□■
PKP244D23A2-R3□■
PKP245D08A2-R3□■
PKP245D15A2-R3□■
PKP245D23A2-R3□■
PKP246D15A2-R3□■
PKP246D23A2-R3□■
PKP264D14A2-R3□■
PKP264D28A2-R3□■
PKP264D42A2-R3□■
PKP266D14A2-R3□■
PKP266D28A2-R3□■
PKP266D42A2-R3□■
PKP268D14A2-R3□■
PKP268D28A2-R3□■
PKP268D42A2-R3□■

- ◇ Standard Type with Electromagnetic Brake
- Bipolar (4 lead wires)

Product Name
PKP223D15M2
PKP225D15M2
PKP233D15M
PKP235D15M
PKP243D23M2
PKP244D23M2
PKP245D23M2
PKP246D23M2
PKP264D28M2
PKP266D28M2
PKP268D28M2

- Unipolar (6 lead wires)

Product Name
PKP223U09M2
PKP225U09M2
PKP233U12M
PKP235U12M
PKP243U09M
PKP244U12M
PKP245U12M
PKP246U12M
PKP264U20M
PKP266U20M
PKP268U20M

- ◇ High-Resolution Type
- Bipolar (4 lead wires)

Product Name (Single Shaft)	Product Name (Double Shaft)
PKP223MD15A	PKP223MD15B
PKP225MD15A	PKP225MD15B
PKP243MD15A2	PKP243MD15B2
PKP243MD15A	PKP243MD15B
PKP244MD15A2	PKP244MD15B2
PKP244MD15A	PKP244MD15B
PKP245MD15A2	PKP245MD15B2
PKP246MD15A2	PKP246MD15B2
PKP264MD28A2	PKP264MD28B2
PKP264MD28A	PKP264MD28B
PKP266MD28A2	PKP266MD28B2
PKP266MD28A	PKP266MD28B
PKP268MD28A2	PKP268MD28B2
PKP268MD28A	PKP268MD28B

- Unipolar (5 or 6 lead wires)

Product Name (Single Shaft)	Product Name (Double Shaft)
PKP223MU09A	PKP223MU09B
PKP225MU09A	PKP225MU09B
PKP243MU09A	PKP243MU09B
PKP243MU12A2	PKP243MU12B2
PKP244MU12A2	PKP244MU12B2
PKP244MU12A	PKP244MU12B
PKP245MU12A2	PKP245MU12B2
PKP246MU12A2	PKP246MU12B2
PKP264MU20A2	PKP264MU20B2
PKP264MU20A	PKP264MU20B
PKP266MU20A2	PKP266MU20B2
PKP266MU20A	PKP266MU20B
PKP268MU20A2	PKP268MU20B2
PKP268MU20A	PKP268MU20B

● A letter “E” (200 P/R) or “F” (400 P/R) indicating the encoder resolution is specified where the box □ is located in the product name.  
 A letter “E” (200 P/R), “F” (400 P/R) or “J” (1000 P/R) indicating the encoder resolution is specified where the box ■ is located in the product name.  
 A letter “L” (line driver output) indicating the encoder output circuit configuration is specified where the box ■ is located in the product name. For voltage output, there is no letter in the ■ box.



◇ High-Resolution Type with Encoder

● Bipolar (4 lead wires)

Product Name
<b>PKP223MD15A-R3F</b> ■
<b>PKP225MD15A-R3F</b> ■
<b>PKP243MD15A2-R3F</b> ■
<b>PKP244MD15A2-R3F</b> ■
<b>PKP245MD15A2-R3F</b> ■
<b>PKP246MD15A2-R3F</b> ■
<b>PKP264MD28A2-R3F</b> ■
<b>PKP266MD28A2-R3F</b> ■
<b>PKP268MD28A2-R3F</b> ■

◇ High-Resolution Type with Electromagnetic Brake

● Bipolar (4 lead wires)

Product Name
<b>PKP243MD15M</b>
<b>PKP244MD15M</b>
<b>PKP264MD28M</b>
<b>PKP266MD28M</b>
<b>PKP268MD28M</b>

◇ Flat Type

● Bipolar (4 lead wires)

Product Name (Single Shaft)
<b>PKP242D23A2</b>
<b>PKP262FD15AW</b>

◇ **SH** Geared Type

● Bipolar (4 lead wires)

Product Name (Single Shaft)	Product Name (Double Shaft)
<b>PKP223D15A-SG7.2</b>	<b>PKP223D15B-SG7.2</b>
<b>PKP223D15A-SG9</b>	<b>PKP223D15B-SG9</b>
<b>PKP223D15A-SG10</b>	<b>PKP223D15B-SG10</b>
<b>PKP223D15A-SG18</b>	<b>PKP223D15B-SG18</b>
<b>PKP223D15A-SG36</b>	<b>PKP223D15B-SG36</b>
<b>PKP243D15A2-SG3.6</b>	<b>PKP243D15B2-SG3.6</b>
<b>PKP243D23A2-SG3.6</b>	<b>PKP243D23B2-SG3.6</b>
<b>PKP243D15A2-SG7.2</b>	<b>PKP243D15B2-SG7.2</b>
<b>PKP243D23A2-SG7.2</b>	<b>PKP243D23B2-SG7.2</b>
<b>PKP243D15A2-SG9</b>	<b>PKP243D15B2-SG9</b>
<b>PKP243D23A2-SG9</b>	<b>PKP243D23B2-SG9</b>
<b>PKP243D15A2-SG10</b>	<b>PKP243D15B2-SG10</b>
<b>PKP243D23A2-SG10</b>	<b>PKP243D23B2-SG10</b>
<b>PKP243D15A2-SG18</b>	<b>PKP243D15B2-SG18</b>
<b>PKP243D23A2-SG18</b>	<b>PKP243D23B2-SG18</b>
<b>PKP243D15A2-SG36</b>	<b>PKP243D15B2-SG36</b>
<b>PKP243D23A2-SG36</b>	<b>PKP243D23B2-SG36</b>
<b>PKP264D14A2-SG3.6</b>	<b>PKP264D14B2-SG3.6</b>
<b>PKP264D28A2-SG3.6</b>	<b>PKP264D28B2-SG3.6</b>
<b>PKP264D14A2-SG7.2</b>	<b>PKP264D14B2-SG7.2</b>
<b>PKP264D28A2-SG7.2</b>	<b>PKP264D28B2-SG7.2</b>
<b>PKP264D14A2-SG9</b>	<b>PKP264D14B2-SG9</b>
<b>PKP264D28A2-SG9</b>	<b>PKP264D28B2-SG9</b>
<b>PKP264D14A2-SG10</b>	<b>PKP264D14B2-SG10</b>
<b>PKP264D28A2-SG10</b>	<b>PKP264D28B2-SG10</b>
<b>PKP264D14A2-SG18</b>	<b>PKP264D14B2-SG18</b>
<b>PKP264D28A2-SG18</b>	<b>PKP264D28B2-SG18</b>
<b>PKP264D14A2-SG36</b>	<b>PKP264D14B2-SG36</b>
<b>PKP264D28A2-SG36</b>	<b>PKP264D28B2-SG36</b>

● Unipolar (6 lead wires)

Product Name
<b>PKP243MU09M</b>
<b>PKP244MU12M</b>
<b>PKP264MU20M</b>
<b>PKP266MU20M</b>
<b>PKP268MU20M</b>

◇ Flat Type with Harmonic Geared

● Bipolar (4 lead wires)

Product Name (Single Shaft)
<b>PKP242D23A2-H50</b>
<b>PKP242D23A2-H100</b>
<b>PKP262FD15AW-H50S</b>
<b>PKP262FD15AW-H100S</b>

● Unipolar (5 or 6 lead wires)

Product Name (Single Shaft)	Product Name (Double Shaft)
<b>PKP223U09A-SG7.2</b>	<b>PKP223U09B-SG7.2</b>
<b>PKP223U09A-SG9</b>	<b>PKP223U09B-SG9</b>
<b>PKP223U09A-SG10</b>	<b>PKP223U09B-SG10</b>
<b>PKP223U09A-SG18</b>	<b>PKP223U09B-SG18</b>
<b>PKP223U09A-SG36</b>	<b>PKP223U09B-SG36</b>
<b>PKP243U09A2-SG3.6</b>	<b>PKP243U09B2-SG3.6</b>
<b>PKP243U09A2-SG7.2</b>	<b>PKP243U09B2-SG7.2</b>
<b>PKP243U09A2-SG9</b>	<b>PKP243U09B2-SG9</b>
<b>PKP243U09A2-SG10</b>	<b>PKP243U09B2-SG10</b>
<b>PKP243U09A2-SG18</b>	<b>PKP243U09B2-SG18</b>
<b>PKP243U09A2-SG36</b>	<b>PKP243U09B2-SG36</b>
<b>PKP264U10A2-SG3.6</b>	<b>PKP264U10B2-SG3.6</b>
<b>PKP264U20A2-SG3.6</b>	<b>PKP264U20B2-SG3.6</b>
<b>PKP264U10A2-SG7.2</b>	<b>PKP264U10B2-SG7.2</b>
<b>PKP264U20A2-SG7.2</b>	<b>PKP264U20B2-SG7.2</b>
<b>PKP264U10A2-SG9</b>	<b>PKP264U10B2-SG9</b>
<b>PKP264U20A2-SG9</b>	<b>PKP264U20B2-SG9</b>
<b>PKP264U10A2-SG10</b>	<b>PKP264U10B2-SG10</b>
<b>PKP264U20A2-SG10</b>	<b>PKP264U20B2-SG10</b>
<b>PKP264U10A2-SG18</b>	<b>PKP264U10B2-SG18</b>
<b>PKP264U20A2-SG18</b>	<b>PKP264U20B2-SG18</b>
<b>PKP264U10A2-SG36</b>	<b>PKP264U10B2-SG36</b>
<b>PKP264U20A2-SG36</b>	<b>PKP264U20B2-SG36</b>

● A letter "L" (line driver output) indicating the encoder output circuit configuration is specified where the box ■ is located in the product name. For voltage output, there is no letter in the ■ box.

2-Phase  
Motors  
**PKP**

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

Flat  
Type

**SH** Geared  
Type

**CS** Geared  
Type

Common  
Specifications

Inner  
Wiring  
of Motor

5-Phase  
Motors  
**PKP**

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

**T5** Geared  
Type

Common  
Specifications

Motor  
Pin  
Arrangement

Drivers for  
2-Phase/5-Phase  
Motors

Cables

Peripheral  
Equipment

Motor  
Frame Size

□13 mm

□20 mm

□28 mm

□35 mm

□42 mm

□50 mm  
□51 mm

□56.4 mm

□60 mm  
□61 mm

□85 mm  
□90 mm

◇ **CS** Geared Type

● **Bipolar** (4 lead wires)

Product Name (Single Shaft)	List Price	Product Name (Double Shaft)	List Price
<b>PKP223D15A-CS10</b>		<b>PKP223D15B-CS10</b>	
<b>PKP223D15A-CS15</b>		<b>PKP223D15B-CS15</b>	
<b>PKP223D15A-CS20</b>		<b>PKP223D15B-CS20</b>	
<b>PKP243D15A2-CS5</b>		<b>PKP243D15B2-CS5</b>	
<b>PKP243D23A2-CS5</b>		<b>PKP243D23B2-CS5</b>	
<b>PKP243D15A2-CS10</b>		<b>PKP243D15B2-CS10</b>	
<b>PKP243D23A2-CS10</b>		<b>PKP243D23B2-CS10</b>	
<b>PKP243D15A2-CS15</b>		<b>PKP243D15B2-CS15</b>	
<b>PKP243D23A2-CS15</b>		<b>PKP243D23B2-CS15</b>	
<b>PKP243D15A2-CS20</b>		<b>PKP243D15B2-CS20</b>	
<b>PKP243D23A2-CS20</b>		<b>PKP243D23B2-CS20</b>	
<b>PKP264D14A2-CS5</b>		<b>PKP264D14B2-CS5</b>	
<b>PKP264D28A2-CS5</b>		<b>PKP264D28B2-CS5</b>	
<b>PKP264D14A2-CS10</b>		<b>PKP264D14B2-CS10</b>	
<b>PKP264D28A2-CS10</b>		<b>PKP264D28B2-CS10</b>	
<b>PKP264D14A2-CS15</b>		<b>PKP264D14B2-CS15</b>	
<b>PKP264D28A2-CS15</b>		<b>PKP264D28B2-CS15</b>	
<b>PKP264D14A2-CS20</b>		<b>PKP264D14B2-CS20</b>	
<b>PKP264D28A2-CS20</b>		<b>PKP264D28B2-CS20</b>	

● **Unipolar** (6 lead wires)

Product Name (Single Shaft)	List Price	Product Name (Double Shaft)	List Price
<b>PKP223U09A-CS10</b>		<b>PKP223U09B-CS10</b>	
<b>PKP223U09A-CS15</b>		<b>PKP223U09B-CS15</b>	
<b>PKP223U09A-CS20</b>		<b>PKP223U09B-CS20</b>	

● **Driver**

Refer to page 138 for details on drivers.

● **Connection Cable**

Refer to the dimensions page for each product for information on connection cables and applicable motors.  
Some cables are available that can be directly connected to the recommended driver. See page 152.

## Included

Type	Included	Surge Suppressor	Parallel Key	Motor Mounting Screw	Operating Manual
Standard Type High-Resolution Type	With Encoder	—	—	—	1 Copy
	With Electromagnetic Brake	1 pc.	—	—	
	Flat Type	—	—	—	
<b>SH</b> Geared Type	Frame Size 28 mm Frame Size 42 mm Frame Size 60 mm	—	—	—	— *
<b>CS</b> Geared Type	Frame Size 28 mm Frame Size 42 mm	—	—	—	—
	Frame Size 60 mm	—	1 pc.	M4×60 P0.7 (4 Screws)	

\*An operating manual is included with encoder types.

## How to Read Specifications

Maximum Holding Torque	: This is the maximum holding torque (holding force) the motor has when power is supplied (at rated current) but the motor is not rotating. (With geared types, the value of holding torque considers the permissible strength of the gear.)
Permissible Torque	: The permissible torque represents the maximum value limited by the mechanical strength of the output gear shaft when operated at a constant speed. For the <b>SH</b> geared types and <b>CS</b> geared types, the total torque including acceleration and deceleration torque should not exceed the permissible torque.
Maximum Instantaneous Torque	: This is the maximum torque that can be applied to the gear output shaft during acceleration/deceleration such when an inertial load is started and stopped.

**COMING  
SOON**

# Standard Type

## Frame Size 13 mm (Bipolar 4 lead wires)

### Mini-Connector Type

## Specifications

Product Name	Maximum Holding Torque Nm	Rotor Inertia J: kgm <sup>2</sup>	Rated Current A/Phase	Voltage VDC	Winding Resistance Ω/Phase	Inductance mH/Phase	Basic Step Angle	Recommended Driver Product Name*
<b>PKP203D06</b> □	0.0075	$0.41 \times 10^{-7}$	0.6	1.9	3.2	1.1	1.8°	<b>CVD206BR-K</b>

● The box □ in the product name indicates the shaft **A** (single shaft) or **B** (double shaft).


\*See "Drivers for 2-Phase / 5-Phase Motors" page for drivers that can be used in combination.

### Note

● Be sure to set the driver current at or below the motor rated current. If the motor rated current is exceeded, the product will be damaged.

## Speed – Torque Characteristics (Reference values) fs: Max. Starting Frequency

### PKP203D06A/PKP203D06B

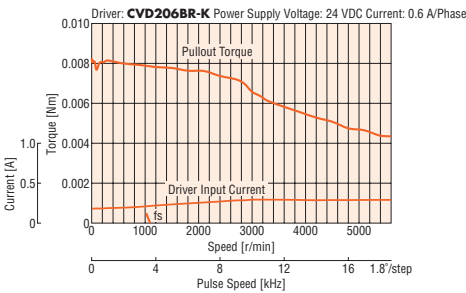

### Note

● Data for the speed – torque characteristics is based on Oriental Motor's internal measurement conditions. If the conditions are changed, the characteristics may also change as a result.

● Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C or less.

● The characteristics are the same if combined with an RS-485 communication type driver.

## Dimensions (Unit: mm)

### Motor

Product Name	Mass [kg]
<b>PKP203D06A</b> <b>PKP203D06B</b>	0.021

### Applicable Connector

Connector Housing: DF52-4P-0.8C


(HIROSE ELECTRIC CO., LTD.)

Contact: DF52-2832PCF

(HIROSE ELECTRIC CO., LTD.)

Crimp Tool: AP105-DF52-2832P

(HIROSE ELECTRIC CO., LTD.)

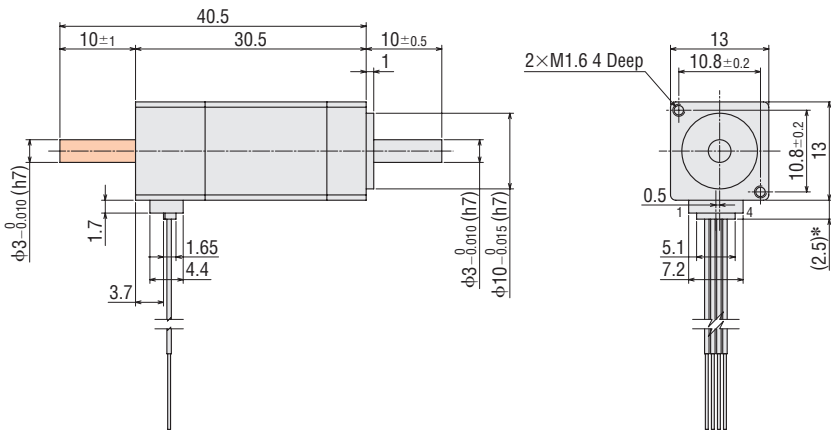

\*With connection cable


● These dimensions are for double shaft motors.

For single shaft motors, ignore the shaded areas.

### Connection Cable (Sold separately)

#### ◇ Motor Connection Cable

Product Name	Length L [m]
<b>LC2B10G</b>	1

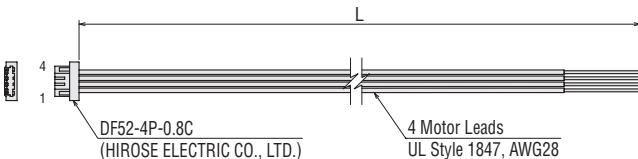

### Note

● The voltage applied to the cable should be 30 V or lower. If 30 V is exceeded, the cable will be damaged.

## Inner Wiring Diagram of Motor

Wiring Diagram No.: Model D⑧

● Refer to the motor inner wiring page for an inner wiring diagram of the motor.

2-Phase  
Motors  
PKP

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

Flat  
Type

**SH** Geared  
Type

**CS** Geared  
Type

Common  
Specifications

Inner  
Wiring  
of Motor

5-Phase  
Motors  
PKP

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

**TS** Geared  
Type

Common  
Specifications

Motor  
Pin  
Arrangement

Drivers for  
2-Phase/5-Phase  
Motors

Cables

Peripheral  
Equipment

Motor Frame Size

13 mm

20 mm

28 mm

35 mm

42 mm

56.4 mm

60 mm

61 mm

85 mm

90 mm

# Standard Type

## Frame Size 20 mm (Bipolar 4 lead wires)

### Lead Wire Type

### Specifications

Product Name	Maximum Holding Torque Nm	Rotor Inertia J: kgm <sup>2</sup>	Rated Current A/Phase	Voltage VDC	Winding Resistance Ω/Phase	Inductance mH/Phase	Basic Step Angle	Recommended Driver Product Name*
<b>PKP213D05</b> <input type="checkbox"/>	0.02	1.6×10 <sup>-7</sup>	0.5	4.25	8.5	4.1	1.8°	<b>CVD205BR-K</b>
<b>PKP214D06</b> <input type="checkbox"/>	0.036	2.9×10 <sup>-7</sup>	0.6	3.9	6.5	3.5		<b>CVD206BR-K</b>


● The box ☐ in the product name indicates the shaft **A** (single shaft) or **B** (double shaft).  
 \*See "Drivers for 2-Phase / 5-Phase Motors" page for drivers that can be used in combination.

#### Note


● Be sure to set the driver current at or below the motor rated current. If the motor rated current is exceeded, the product will be damaged.

### Speed – Torque Characteristics (Reference values) <sub>fs</sub>: Max. Starting Frequency

PKP213D05A/PKP213D05B

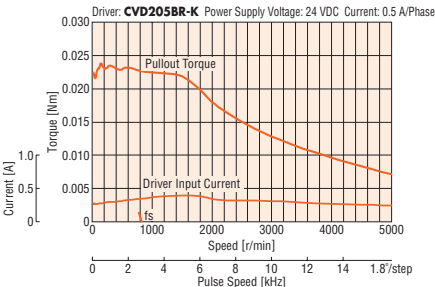

PKP214D06A/PKP214D06B

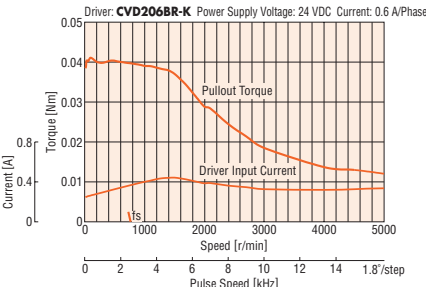


#### Note

- Data for the speed – torque characteristics is based on Oriental Motor's internal measurement conditions. If the conditions are changed, the characteristics may also change as a result.
- Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C max.
- The characteristics are the same when RS-485 communication type driver is used in combination.

### Dimensions (Unit: mm)

#### Motor

Product Name	L1	L2
<b>PKP213D05A</b>	30	—
<b>PKP213D05B</b>		38
<b>PKP214D06A</b>	40	—
<b>PKP214D06B</b>		48

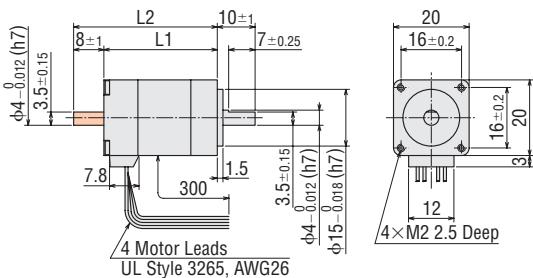

- These dimensions are for double shaft motors.  
For single shaft motors, ignore the shaded  areas.
- The back shaft side of the double shaft model is entirely shaft flat.

### Inner Wiring Diagram of Motor

Wiring Diagram No.: Model C⑤

- See "Inner Wiring Diagram of Motor" page for the inner wiring diagram of the motor.





- Motor  
Frame Size
- 13 mm
- 20 mm
- 28 mm
- 35 mm
- 42 mm
- 56.4 mm
- 60 mm
- 61 mm
- 85 mm
- 90 mm

# Standard Type with Encoder

## Frame Size 20 mm (Bipolar 4 lead wires)

### Lead Wire Type

### Specifications

Product Name	Maximum Holding Torque Nm	Rotor Inertia J: kgm <sup>2</sup>	Rated Current A/Phase	Voltage VDC	Winding Resistance Ω/Phase	Inductance mH/Phase	Basic Step Angle	Recommended Driver Product Name*
<b>PKP213D05A-R3</b> <span style="border: 1px solid black; padding: 0 2px;"> </span> <span style="border: 1px solid black; padding: 0 2px;"> </span>	0.02	$2.5 \times 10^{-7}$	0.5	4.25	8.5	4.1	1.8°	<b>CVD205BR-K</b>
<b>PKP214D06A-R3</b> <span style="border: 1px solid black; padding: 0 2px;"> </span> <span style="border: 1px solid black; padding: 0 2px;"> </span>	0.036	$3.8 \times 10^{-7}$	0.6	3.9	6.5	3.5		<b>CVD206BR-K</b>

- A letter "E" (200 P/R) or "F" (400 P/R) indicating the encoder resolution is specified where the box   is located in the product name.
- A letter "L" (line driver output) indicating the encoder output circuit configuration is specified where the box   is located in the product name. For voltage output, there is no letter in the   box.
- Refer to the common specifications page for encoder specifications.


\*See "Drivers for 2-Phase / 5-Phase Motors" page for drivers that can be used in combination.

#### Note


- Be sure to set the driver current at or below the motor rated current. If the motor rated current is exceeded, the product will be damaged.

### Speed - Torque Characteristics (Reference values) fs: Max. Starting Frequency

**PKP213D05A-R3**  

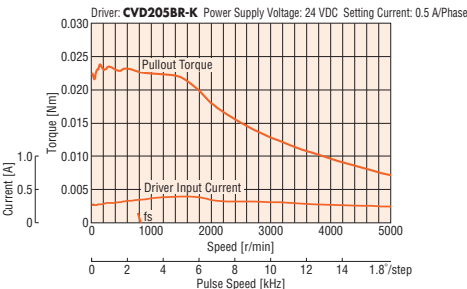

**PKP214D06A-R3**  

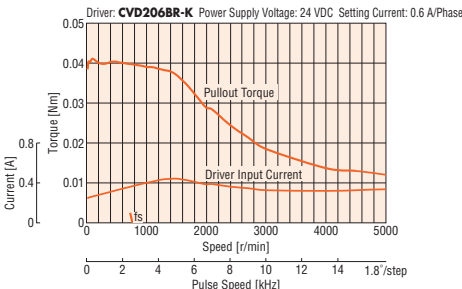

#### Note

- Data for the speed – torque characteristics is based on Oriental Motor's internal measurement conditions. If the conditions are changed, the characteristics may also change as a result.
- Depending on the driving conditions, a considerable amount of heat may be generated by the motor. To protect the encoder, be sure to keep the motor case temperature at 85°C max.
- The characteristics are the same if combined with an RS-485 communication type driver.


### Dimensions (Unit = mm)

#### Motor

Product Name	L	Mass [kg]
<b>PKP213D05A-R3</b> <span style="border: 1px solid black; padding: 0 2px;"> </span> <span style="border: 1px solid black; padding: 0 2px;"> </span>	46.5	0.07
<b>PKP214D06A-R3</b> <span style="border: 1px solid black; padding: 0 2px;"> </span> <span style="border: 1px solid black; padding: 0 2px;"> </span>	56.5	0.09

- Applicable Connector (Molex)

	Encoder
Connector Housing	51021-0800
Contact	50079-8100
Crimp Tool	57177-5000

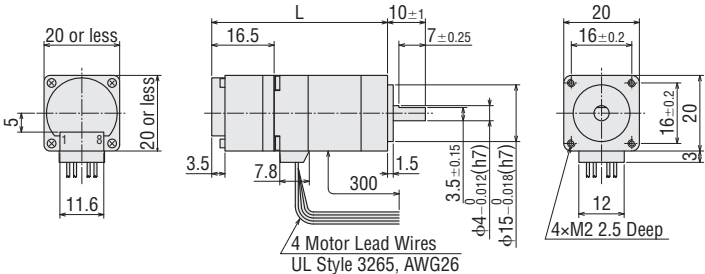

#### Connection Cable (Sold separately)

##### Encoder Connection Cable

##### For Voltage Output

Product Name	Length L [m]
<b>LCE05A-006</b>	0.6

##### For Line Driver Output

Product Name	Length L [m]
<b>LCE08A-006</b>	0.6

- Refer to the cables page for dimensions.

### Inner Wiring Diagram of Motor

Wiring Diagram No.: Model C⑤

- Refer to the motor inner wiring page for an inner wiring diagram of the motor.

- A letter "E" (200 P/R) or "F" (400 P/R) indicating the encoder resolution is specified where the box   is located in the product name.
- A letter "L" (line driver output) indicating the encoder output circuit configuration is specified where the box   is located in the product name. For voltage output, there is no letter in the   box.



- Motor Frame Size
- 13 mm
- 20 mm
- 28 mm
- 35 mm
- 42 mm
- 56.4 mm
- 60 mm
- 61 mm
- 85 mm
- 90 mm

# Standard Type

## Frame Size 28 mm (Unipolar 6 lead wires)

### Connector Type

### Specifications

Product Name	Maximum Holding Torque Nm	Rotor Inertia J: kgm <sup>2</sup>	Rated Current A/Phase	Voltage VDC	Winding Resistance Ω/Phase	Inductance mH/Phase	Basic Step Angle	Recommended Driver Product Name*
PKP223U09□ <b>2</b>	0.075	9×10 <sup>-7</sup>	0.95	2.95	3.11	1.44	1.8°	CMD2109P
PKP225U09□ <b>2</b>	0.135	18×10 <sup>-7</sup>		4.4	4.6	2.11		


● The box □ in the product name indicates the shaft **A** (single shaft) or **B** (double shaft).  
 \*See "Drivers for 2-Phase / 5-Phase Motors" page for details on the recommended drivers.

#### Note


● Be sure to set the driver current at or below the motor rated current. If the motor rated current is exceeded, the product will be damaged.

### Speed – Torque Characteristics (Reference values) fs: Max. Starting Frequency

PKP223U09A2/ PKP223U09B2

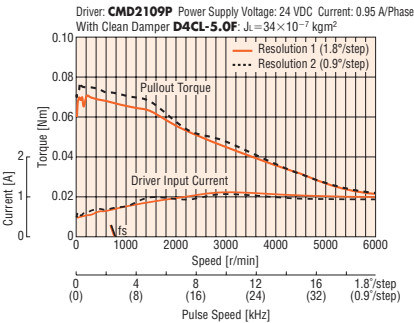

PKP225U09A2/ PKP225U09B2

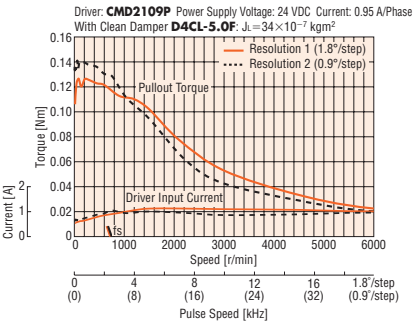

#### Note


- Data for the speed – torque characteristics is based on Oriental Motor's internal measurement conditions. If the conditions are changed, the characteristics may also change as a result.
- If there is a "clean damper" entry in the speed – torque characteristics, the data is for a double shaft motor when a clean damper is equipped.
- Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C max.

### Dimensions (Unit: mm)

#### Motor

Product Name	L1	L2	Mass [kg]
PKP223U09A2	32	—	0.11
PKP223U09B2		42	
PKP225U09A2	51.5	—	0.2
PKP225U09B2		61.5	

- Applicable Connector  
 Connector Housing: 51065-0600 (Molex)  
 Contact: 50212-8100 (Molex)  
 Crimp Tool: 57176-5000 (Molex)

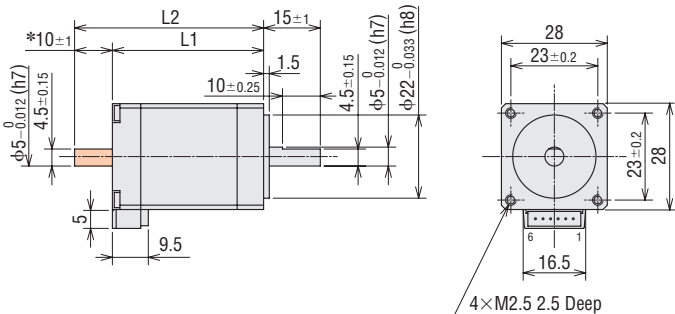


- \*The length of the shaft flat on the double shaft model is 10±0.25.
- These dimensions are for double shaft motors.  
 For single shaft motors, ignore the shaded areas.

#### Connection Cable (Sold separately)

##### Motor Connection Cable

Product Name	Length L [m]
LC2U06A	0.6
LC2U10A	1

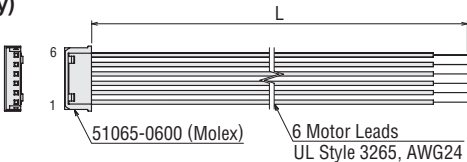

### Inner Wiring Diagram of Motor

Wiring Diagram No.: Model B④

- See "Inner Wiring Diagram of Motor" page for the inner wiring diagram of the motor.

# Standard Type with Encoder

## Frame Size 28 mm (Bipolar 4 lead wires)

### Connector Type

## Specifications

Product Name	Maximum Holding Torque Nm	Rotor Inertia J: kgm <sup>2</sup>	Rated Current A/Phase	Voltage VDC	Winding Resistance Ω/Phase	Inductance mH/Phase	Basic Step Angle	Recommended Driver Product Name*
<b>PKP223D15A2-R3</b> <span style="border: 1px solid black; padding: 0 2px;"> </span>	0.095	$9.9 \times 10^{-7}$	1.5	1.77	1.18	0.96	1.8°	<b>CVD215BR-K</b>
<b>PKP225D15A2-R3</b> <span style="border: 1px solid black; padding: 0 2px;"> </span>	0.19	$19 \times 10^{-7}$		3	2	1.6		

● A letter "E" (200 P/R) or "F" (400 P/R) indicating the encoder resolution is specified where the box   is located in the product name.

A letter "L" (line driver output) indicating the encoder output circuit configuration is specified where the box   is located in the product name. For voltage output, there is no letter in the   box.

● Refer to the common specifications page for encoder specifications.


\*See "Drivers for 2-Phase / 5-Phase Motors" page for drivers that can be used in combination.

### Note


● Be sure to set the driver current at or below the motor rated current. If the motor rated current is exceeded, the product will be damaged.

## Speed - Torque Characteristics (Reference values) $f_s$ : Max. Starting Frequency

**PKP223D15A2-R3**  

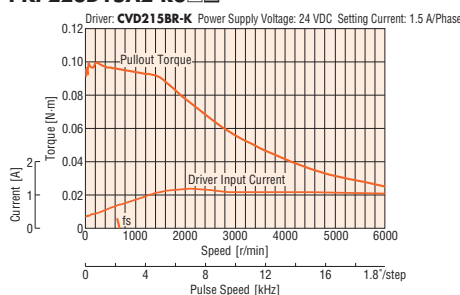

**PKP225D15A2-R3**  

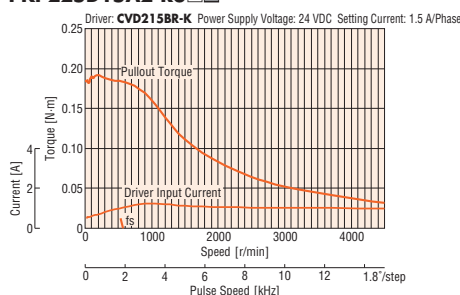

### Note

● Data for the speed – torque characteristics is based on Oriental Motor's internal measurement conditions. If the conditions are changed, the characteristics may also change as a result.

● Depending on the driving conditions, a considerable amount of heat may be generated by the motor. To protect the encoder, be sure to keep the motor case temperature at 85°C max.

● The characteristics are the same if combined with an RS-485 communication type driver.



## Dimensions (Unit = mm)

### Motor

Product Name	L	Mass [kg]
<b>PKP223D15A2-R3</b> <span style="border: 1px solid black; padding: 0 2px;"> </span>	47.5	0.13
<b>PKP225D15A2-R3</b> <span style="border: 1px solid black; padding: 0 2px;"> </span>	67	0.22

● Applicable Connector (Molex)


	Motor	Encoder
Connector Housing	51065-0600	51021-0800
Contact	50212-8100	50079-8100
Crimp Tool	57176-5000	57177-5000

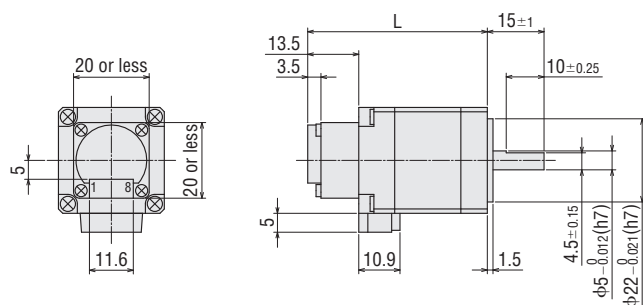

### Connection Cable (Sold separately)

#### Motor Connection Cable

Product Name	Length L [m]
<b>LC2B06A</b>	0.6
<b>LC2B10A</b>	1

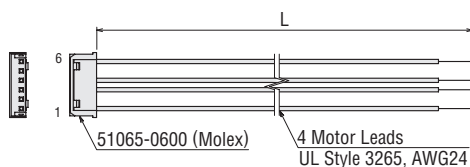

#### Encoder Connection Cable

##### For Voltage Output

Product Name	Length L [m]
<b>LCE05A-006</b>	0.6

##### For Line Driver Output

Product Name	Length L [m]
<b>LCE08A-006</b>	0.6

● Refer to the cables page for dimensions.

● A letter "E" (200 P/R) or "F" (400 P/R) indicating the encoder resolution is specified where the box   is located in the product name.

A letter "L" (line driver output) indicating the encoder output circuit configuration is specified where the box   is located in the product name. For voltage output, there is no letter in the   box.

2-Phase  
Motors  
PKP

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

Flat  
Type

SH Geared  
Type

CS Geared  
Type

Common  
Specifications

Inner  
Wiring  
of Motor

5-Phase  
Motors  
PKP

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

TS Geared  
Type

Common  
Specifications

Motor  
Pin  
Arrangement

Drivers for  
2-Phase/5-Phase  
Motors

Cables

Peripheral  
Equipment

Motor  
Frame Size

13 mm

20 mm

28 mm

35 mm

42 mm

56.4 mm

60 mm  
61 mm

85 mm  
90 mm

# Standard Type with Electromagnetic Brake

## Frame Size 28 mm (Bipolar 4 lead wires)


### Connector Type

### Specifications

Product Name	Maximum Holding Torque Nm	Rotor Inertia J: kgm <sup>2</sup>	Rated Current A/Phase	Voltage VDC	Winding Resistance Ω/Phase	Inductance mH/Phase	Basic Step Angle	Electromagnetic Brake Static Friction Torque Nm
<b>PKP223D15M2</b>	0.095	14×10 <sup>-7</sup> *	1.5	1.77	1.18	0.96	1.8°	0.08
<b>PKP225D15M2</b>	0.19	23×10 <sup>-7</sup> *		3	2	1.6		

- Refer to the common specification page for electromagnetic brake specifications.
  - \*This value is including the electromagnetic brake inertia.
- Note
- Be sure to set the driver current at or below the motor rated current. If the motor rated current is exceeded, the product will be damaged.

### Speed – Torque Characteristics (Reference values) fs: Max. Starting Frequency

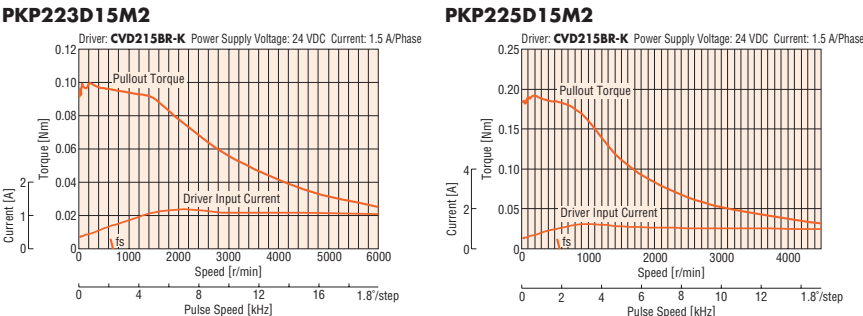


- Note
- Data for the speed – torque characteristics is based on Oriental Motor's internal measurement conditions. If the conditions are changed, the characteristics may also change as a result.
  - Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C max.
  - The characteristics are the same when RS-485 communication type driver is used in combination.

### Dimensions (Unit: mm)

#### Motor

Product Name	L	Mass [kg]
<b>PKP223D15M2</b>	65.5	0.17
<b>PKP225D15M2</b>	85	0.26


- Applicable Connector  
Connector Housing: 51065-0600 (Molex)  
Contact: 50212-8100 (Molex)  
Crimp Tool: 57176-5000 (Molex)

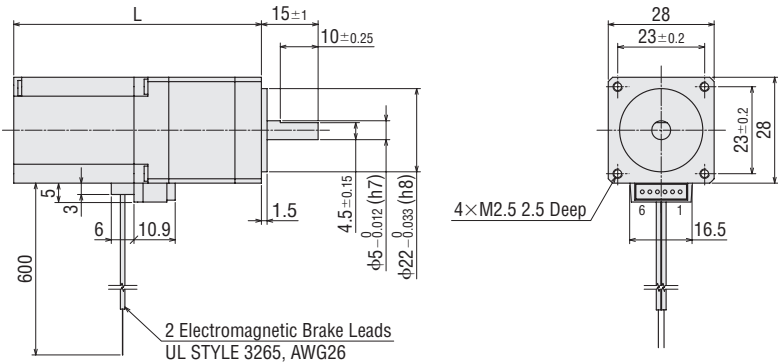

#### Connection Cable (Sold separately)

##### Motor Connection Cable

Product Name	Length L [m]
<b>LC2B06A</b>	0.6
<b>LC2B10A</b>	1

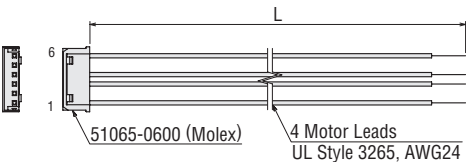

### Inner Wiring Diagram of Motor

Wiring Diagram No.: Model B③

- See "Inner Wiring Diagram of Motor" page for the inner wiring diagram of the motor.



# Standard Type with Electromagnetic Brake Frame Size 28 mm (Unipolar 6 lead wires)

## Connector Type

### Specifications

Product Name	Maximum Holding Torque Nm	Rotor Inertia J: kgm <sup>2</sup>	Rated Current A/Phase	Voltage VDC	Winding Resistance Ω/Phase	Inductance mH/Phase	Basic Step Angle	Electromagnetic Brake Static Friction Torque Nm
<b>PKP223U09M2</b>	0.075	14×10 <sup>-7</sup> *	0.95	2.95	3.11	1.44	1.8°	0.08
<b>PKP225U09M2</b>	0.135	23×10 <sup>-7</sup> *		4.4	4.6	2.11		

● Refer to the common specification page for electromagnetic brake specifications.


\*This value is including the electromagnetic brake inertia.

#### Note


● Be sure to set the driver current at or below the motor rated current. If the motor rated current is exceeded, the product will be damaged.

### Speed – Torque Characteristics (Reference values) $f_s$ : Max. Starting Frequency

#### PKP223U09M2

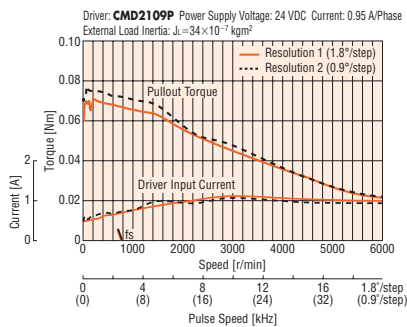

#### PKP225U09M2

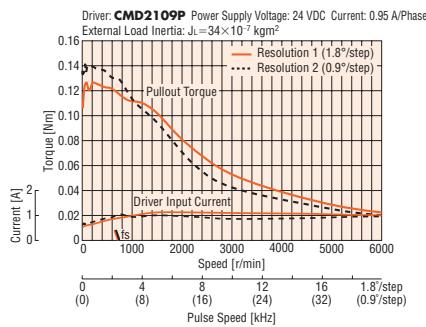

#### Note

● Data for the speed – torque characteristics is based on Oriental Motor's internal measurement conditions. If the conditions are changed, the characteristics may also change as a result.

● The data in the speed – torque characteristics represents the use of an external load inertia.

● Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C max.

### Dimensions (Unit: mm)

#### Motor



Product Name	L	Mass [kg]
<b>PKP223U09M2</b>	65.5	0.17
<b>PKP225U09M2</b>	85	0.26

#### Applicable Connector

Connector Housing: 51065-0600 (Molex)

Contact: 50212-8100 (Molex)


Crimp Tool: 57176-5000 (Molex)

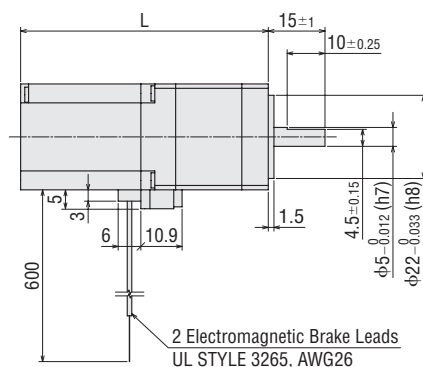

#### Connection Cable (Sold separately)

#### Motor Connection Cable

Product Name	Length L [m]
<b>LC2U06A</b>	0.6
<b>LC2U10A</b>	1

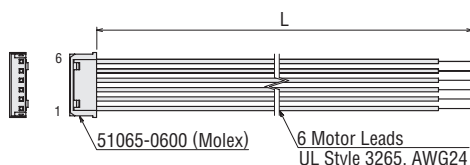

2-Phase  
Motors  
PKP

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

Flat  
Type

SH Geared  
Type

CS Geared  
Type

Common  
Specifications

Inner  
Wiring  
of Motor

5-Phase  
Motors  
PKP

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

TS Geared  
Type

Common  
Specifications

Motor  
Pin  
Arrangement

Drivers for  
2-Phase/5-Phase  
Motors

Cables

Peripheral  
Equipment



# Standard Type Frame Size 35 mm (Unipolar 6 lead wires)

## Connector Type

## Specifications

Product Name	Maximum Holding Torque Nm	Rotor Inertia J: kgm <sup>2</sup>	Rated Current A/Phase	Voltage VDC	Winding Resistance Ω/Phase	Inductance mH/Phase	Basic Step Angle	Recommended Driver Product Name*
PKP233U12□	0.16	24×10 <sup>-7</sup>	1.2	3.24	2.7	1.4	1.8°	CMD2112P
PKP235U12□	0.3	50×10 <sup>-7</sup>		4.08	3.4	2		

● The box □ in the product name indicates the shaft **A** (single shaft) or **B** (double shaft).


\*See "Drivers for 2-Phase / 5-Phase Motors" page for details on the recommended drivers.

### Note


● Be sure to set the driver current at or below the motor rated current. If the motor rated current is exceeded, the product will be damaged.

## Speed – Torque Characteristics (Reference values) fs: Max. Starting Frequency

### PKP233U12A/PKP233U12B

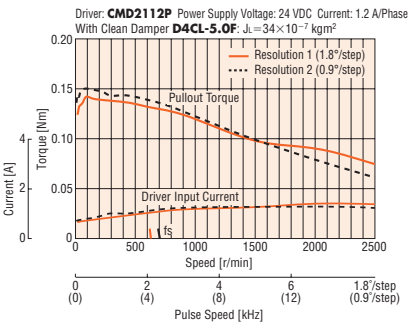

### PKP235U12A/PKP235U12B

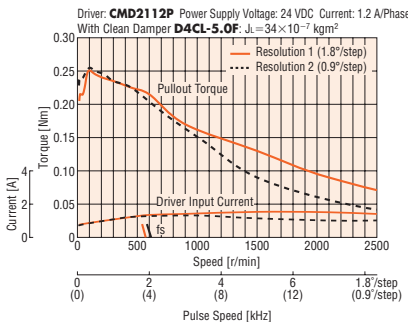

### Note

● Data for the speed – torque characteristics is based on Oriental Motor's internal measurement conditions. If the conditions are changed, the characteristics may also change as a result.

● If there is a "clean damper" entry in the speed – torque characteristics, the data is for a double shaft motor when a clean damper is equipped.

● Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C max.

## Dimensions (Unit: mm)

### Motor

Product Name	L1	L2	Mass [kg]
PKP233U12A	37	—	0.18
PKP233U12B		52	
PKP235U12A	52	—	0.285
PKP235U12B		67	

### Applicable Connector

Connector Housing: 51103-0600 (Molex)



Contact: 50351-8100 (Molex)

Crimp Tool: 57295-5000 (Molex)

### Connection Cable (Sold separately)

#### Motor Connection Cable

Product Name	Length L [m]
LC2U06B	0.6
LC2U10B	1

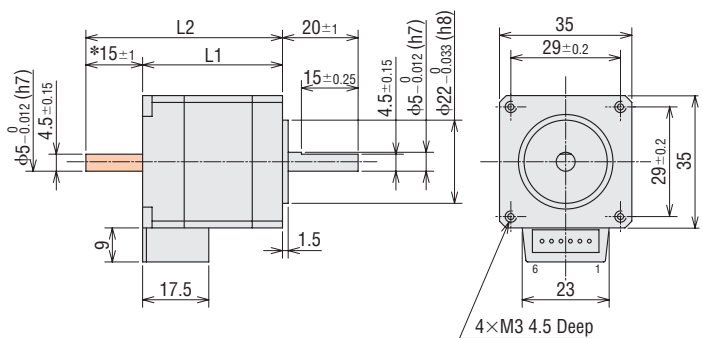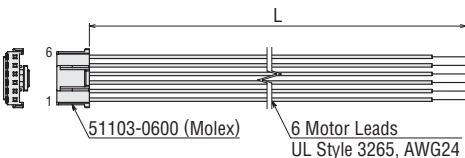

\*The length of the shaft flat on the double shaft model is 15±0.25.

● These dimensions are for double shaft motors.

For single shaft motors, ignore the shaded areas.

## Inner Wiring Diagram of Motor

### Wiring Diagram No.: Model B④

● See "Inner Wiring Diagram of Motor" page for the inner wiring diagram of the motor.

2-Phase  
Motors  
PKP

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

Flat  
Type

SH Geared  
Type

CS Geared  
Type

Common  
Specifications

Inner  
Wiring  
of Motor

5-Phase  
Motors  
PKP

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

TS Geared  
Type

Common  
Specifications

Motor  
Pin  
Arrangement

Drivers for  
2-Phase/5-Phase  
Motors

Cables

Peripheral  
Equipment

Motor Frame Size

13 mm

20 mm

28 mm

35 mm

42 mm

56.4 mm

60 mm

61 mm

85 mm

90 mm

# Standard Type with Encoder

## Frame Size 35 mm (Bipolar 4 lead wires)

### Connector Type

### Specifications

Product Name	Maximum Holding Torque Nm	Rotor Inertia J: kgm <sup>2</sup>	Rated Current A/Phase	Voltage VDC	Winding Resistance Ω/Phase	Inductance mH/Phase	Basic Step Angle	Recommended Driver Product Name*
PKP233D15A-R3□□	0.2	25×10 <sup>-7</sup>	1.5	2.43	1.62	1.5	1.8°	CVD215BR-K
PKP233D23A-R3□□			2.3	1.56	0.68	0.67		CVD223BR-K
PKP235D15A-R3□□	0.37	51×10 <sup>-7</sup>	1.5	3.6	2.4	2.6		CVD215BR-K
PKP235D23A-R3□□			2.3	2.23	0.97	1.2		CVD223BR-K


- A letter “E” (200 P/R) or “F” (400 P/R) indicating the encoder resolution is specified where the box □ is located in the product name.
- A letter “L” (line driver output) indicating the encoder output circuit configuration is specified where the box ■ is located in the product name. For voltage output, there is no letter in the ■ box.
- Refer to the common specifications page for encoder specifications.
- \* See “Drivers for 2-Phase / 5-Phase Motors” page for drivers that can be used in combination.

#### Note


- Be sure to set the driver current at or below the motor rated current. If the motor rated current is exceeded, the product will be damaged.

### Speed - Torque Characteristics (Reference values) fs: Max. Starting Frequency


PKP233D15A-R3□□

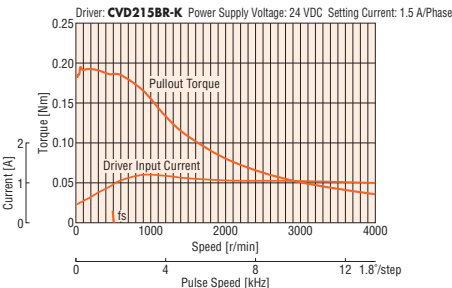


PKP235D15A-R3□□

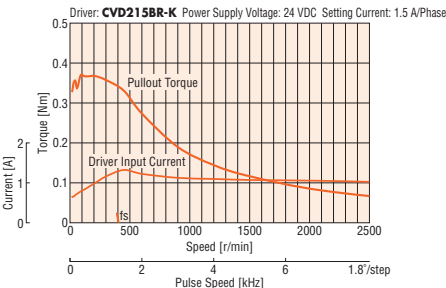

PKP233D23A-R3□□

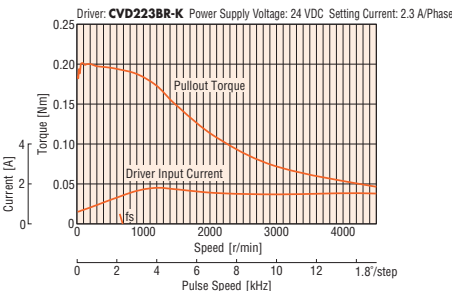

PKP235D23A-R3□□

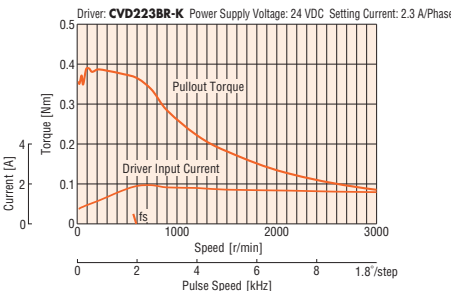

#### Note

- Data for the speed – torque characteristics is based on Oriental Motor’s internal measurement conditions. If the conditions are changed, the characteristics may also change as a result.
- Depending on the driving conditions, a considerable amount of heat may be generated by the motor. To protect the encoder, be sure to keep the motor case temperature at 85°C max.
- The characteristics are the same if combined with an RS-485 communication type driver.

- A letter “E” (200 P/R) or “F” (400 P/R) indicating the encoder resolution is specified where the box □ is located in the product name.
- A letter “L” (line driver output) indicating the encoder output circuit configuration is specified where the box ■ is located in the product name. For voltage output, there is no letter in the ■ box.

## Dimensions (Unit = mm)

### Motor

Product Name	L	Mass [kg]
<b>PKP233D15A-R3</b> <span style="border: 1px solid black; padding: 0 2px;"> </span>	50.5	0.2
<b>PKP233D23A-R3</b> <span style="border: 1px solid black; padding: 0 2px;"> </span>	50.5	0.2
<b>PKP235D15A-R3</b> <span style="border: 1px solid black; padding: 0 2px;"> </span>	65.5	0.31
<b>PKP235D23A-R3</b> <span style="border: 1px solid black; padding: 0 2px;"> </span>	65.5	0.31


● Applicable Connector (Molex)

	Motor	Encoder
Connector Housing	51103-0600	51021-0800
Contact	50351-8100	50079-8100
Crimp Tool	57295-5000	57177-5000

### Connection Cable (Sold separately)

#### Motor Connection Cable


Product Name	Length L [m]
<b>LC2B06B</b>	0.6
<b>LC2B10B</b>	1

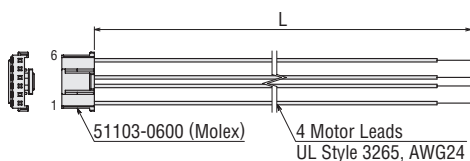

## Inner Wiring Diagram of Motor

Wiring Diagram No.: Model B③

● Refer to the motor inner wiring page for an inner wiring diagram of the motor.

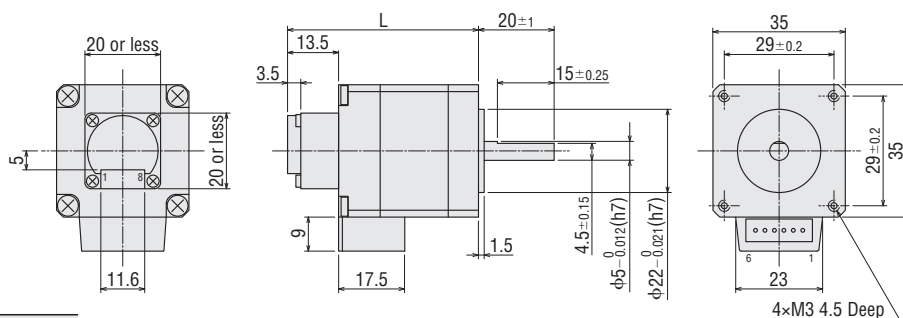

#### Encoder Connection Cable

##### For Voltage Output

Product Name	Length L [m]
<b>LCE05A-006</b>	0.6

##### For Line Driver Output

Product Name	Length L [m]
<b>LCE08A-006</b>	0.6

● Refer to the cables page for dimensions.

2-Phase  
Motors  
PKP

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

Flat  
Type

SH Geared  
Type

CS Geared  
Type

Common  
Specifications

Inner  
Wiring  
of Motor

5-Phase  
Motors  
PKP

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

TS Geared  
Type

Common  
Specifications

Motor  
Pin  
Arrangement

Drivers for  
2-Phase/5-Phase  
Motors

Cables

Peripheral  
Equipment

● A letter "E" (200 P/R) or "F" (400 P/R) indicating the encoder resolution is specified where the box   is located in the product name.

A letter "L" (line driver output) indicating the encoder output circuit configuration is specified where the box   is located in the product name. For voltage output, there is no letter in the   box.

Motor Frame Size

13 mm

20 mm

28 mm

35 mm

42 mm

56.4 mm

60 mm

61 mm

85 mm

90 mm

# Standard Type with Electromagnetic Brake

## Frame Size 35 mm (Bipolar 4 lead wires)


### Connector Type

### Specifications

Product Name	Maximum Holding Torque Nm	Rotor Inertia J: kgm <sup>2</sup>	Rated Current A/Phase	Voltage VDC	Winding Resistance Ω/Phase	Inductance mH/Phase	Basic Step Angle	Electromagnetic Brake Static Friction Torque Nm
PKP233D15M	0.2	36×10 <sup>-7</sup> *	1.5	2.43	1.62	1.5	1.8°	0.3
PKP235D15M	0.37	62×10 <sup>-7</sup> *		3.6	2.4	2.6		

- Refer to the common specification page for electromagnetic brake specifications.
  - \*This value is including the electromagnetic brake inertia.
- Note
- Be sure to set the driver current at or below the motor rated current. If the motor rated current is exceeded, the product will be damaged.

### Speed – Torque Characteristics (Reference values) fs: Max. Starting Frequency

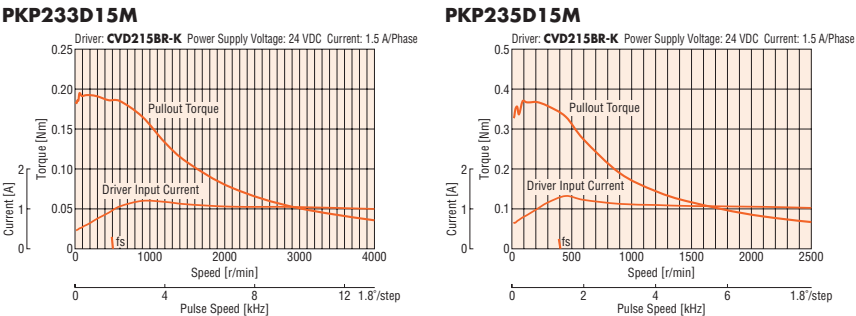


- Note
- Data for the speed – torque characteristics is based on Oriental Motor's internal measurement conditions. If the conditions are changed, the characteristics may also change as a result.
  - Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C max.
  - The characteristics are the same when RS-485 communication type driver is used in combination.

### Dimensions (Unit: mm)

#### Motor

Product Name	L	Mass [kg]
PKP233D15M	71	0.285
PKP235D15M	86	0.39


- Applicable Connector (Molex)  
Connector Housing: 51103-0600  
Contact: 50351-8100  
Crimp Tool: 57295-5000

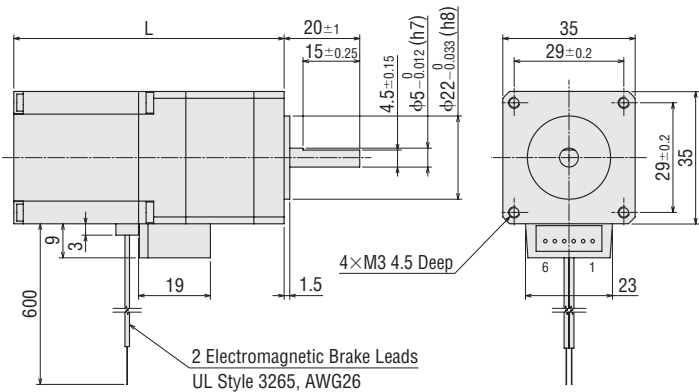

#### Connection Cable (Sold separately)

#### Motor Connection Cable

Product Name	Length L [m]
LC2B06B	0.6
LC2B10B	1

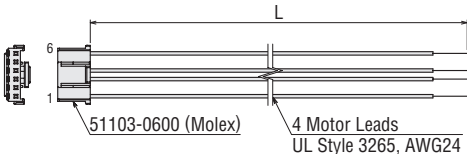

### Inner Wiring Diagram of Motor

Wiring Diagram No.: Model B③

- See "Inner Wiring Diagram of Motor" page for the inner wiring diagram of the motor.



# Standard Type with Electromagnetic Brake

Frame Size 35 mm (Unipolar 6 lead wires)  
Connector Type

## Specifications

Product Name	Maximum Holding Torque Nm	Rotor Inertia J: kgm <sup>2</sup>	Rated Current A/Phase	Voltage VDC	Winding Resistance Ω/Phase	Inductance mH/Phase	Basic Step Angle	Electromagnetic Brake Static Friction Torque Nm
PKP233U12M	0.16	36×10 <sup>-7</sup> *	1.2	3.24	2.7	1.4	1.8°	0.3
PKP235U12M	0.3	62×10 <sup>-7</sup> *		4.08	3.4	2		

● Refer to the common specification page for electromagnetic brake specifications.


\*This value is including the electromagnetic brake inertia.

### Note


● Be sure to set the driver current at or below the motor rated current. If the motor rated current is exceeded, the product will be damaged.

## Speed – Torque Characteristics (Reference values) $f_s$ : Max. Starting Frequency

### PKP233U12M

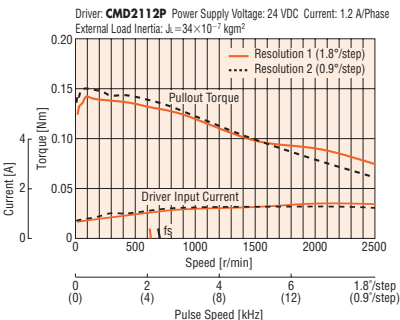

### PKP235U12M

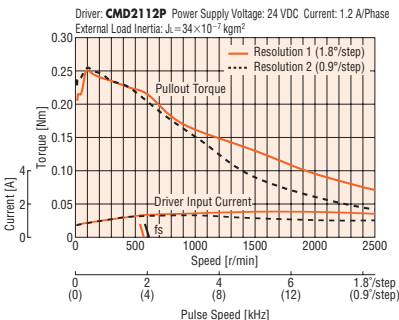

### Note

● Data for the speed – torque characteristics is based on Oriental Motor's internal measurement conditions. If the conditions are changed, the characteristics may also change as a result.

● The data in the speed – torque characteristics represents the use of an external load inertia.

● Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C max.

## Dimensions (Unit: mm)

### Motor


Product Name	L	Mass [kg]
PKP233U12M	71	0.285
PKP235U12M	86	0.39

● Applicable Connector (Molex)

Connector Housing: 51103-0600

Contact: 50351-8100


Crimp Tool: 57295-5000

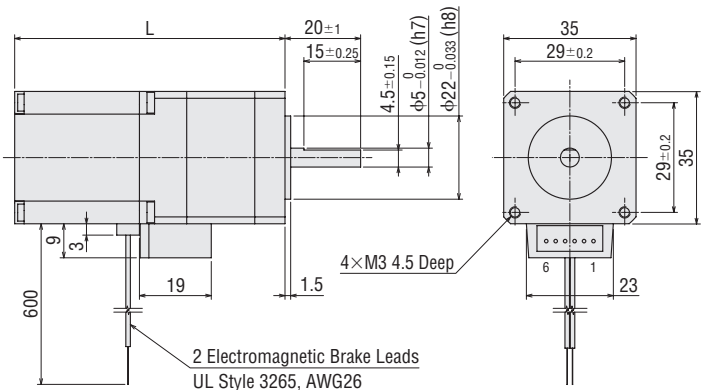

### Connection Cable (Sold separately)

#### Motor Connection Cable

Product Name	Length L [m]
LC2U06B	0.6
LC2U10B	1

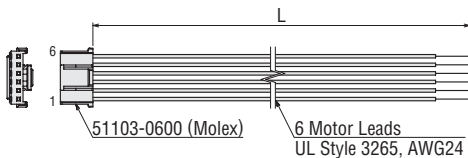

## Inner Wiring Diagram of Motor

Wiring Diagram No.: Model B④

● See "Inner Wiring Diagram of Motor" page for the inner wiring diagram of the motor.

2-Phase  
Motors  
PKP

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

Flat  
Type

SH Geared  
Type

CS Geared  
Type

Common  
Specifications

Inner  
Wiring  
of Motor

5-Phase  
Motors  
PKP

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

TS Geared  
Type

Common  
Specifications

Motor  
Pin  
Arrangement

Drivers for  
2-Phase/5-Phase  
Motors

Cables

Peripheral  
Equipment

Motor  
Frame Size

13 mm

20 mm

28 mm

35 mm

42 mm

56.4 mm

60 mm

61 mm

85 mm

90 mm

# Standard Type

## Frame Size 42 mm (Bipolar 4 lead wires)

### Mini-Connector Type

### Specifications

Product Name	Maximum Holding Torque Nm	Rotor Inertia J: kgm <sup>2</sup>	Rated Current A/Phase	Voltage VDC	Winding Resistance Ω/Phase	Inductance mH/Phase	Basic Step Angle	Recommended Driver Product Name*
<b>PKP243D08</b> <input type="checkbox"/> 2	0.35	36×10 <sup>-7</sup>	0.85	4.6	5.4	10	1.8°	<b>CVD223FBR-K</b>
<b>PKP243D15</b> <input type="checkbox"/> 2			1.5	2.7	1.8	3.3		
<b>PKP243D23</b> <input type="checkbox"/> 2			2.3	1.8	0.78	1.4		
<b>PKP244D08</b> <input type="checkbox"/> 2	0.48	54×10 <sup>-7</sup>	0.85	5.7	6.7	14		
<b>PKP244D15</b> <input type="checkbox"/> 2			1.5	3.2	2.1	4.4		
<b>PKP244D23</b> <input type="checkbox"/> 2			2.3	2.1	0.93	1.9		
<b>PKP245D08</b> <input type="checkbox"/> 2	0.66	73×10 <sup>-7</sup>	0.85	6	7.1	16		
<b>PKP245D15</b> <input type="checkbox"/> 2			1.5	3.3	2.2	5.3		
<b>PKP245D23</b> <input type="checkbox"/> 2			2.3	2.3	1	2.2		
<b>PKP246D15</b> <input type="checkbox"/> 2	0.99	110×10 <sup>-7</sup>	1.5	4.4	2.9	7.9		
<b>PKP246D23</b> <input type="checkbox"/> 2			2.3	3.2	1.4	3.3		

● The box ☐ in the product name indicates the shaft **A** (single shaft) or **B** (double shaft).


\*See "Drivers for 2-Phase / 5-Phase Motors" page for drivers that can be used in combination.

#### Note


● Be sure to set the driver current at or below the motor rated current. If the motor rated current is exceeded, the product will be damaged.

### Speed – Torque Characteristics (Reference values) fs: Max. Starting Frequency


**PKP243D08A2/ PKP243D08B2**

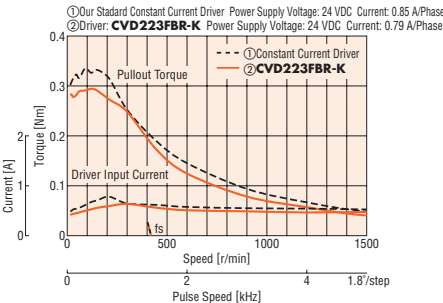


**PKP243D15A2/ PKP243D15B2**

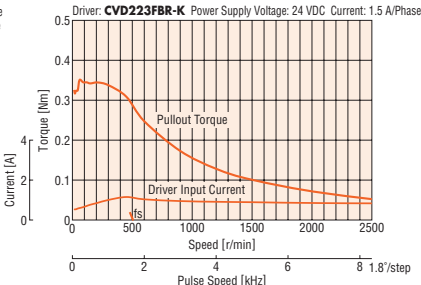


**PKP243D23A2/ PKP243D23B2**

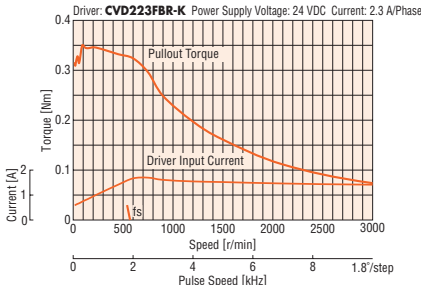


**PKP244D08A2/ PKP244D08B2**

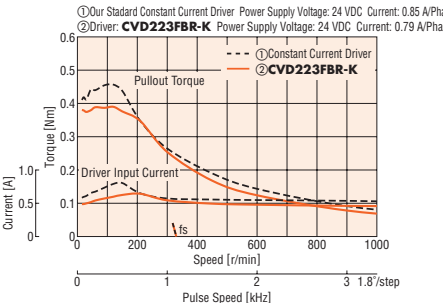


**PKP244D15A2/ PKP244D15B2**

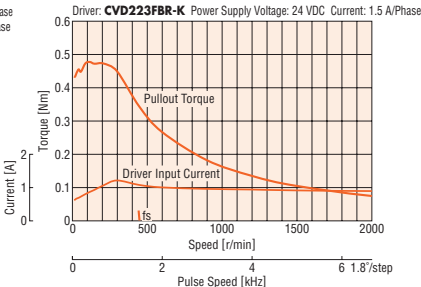


**PKP244D23A2/ PKP244D23B2**

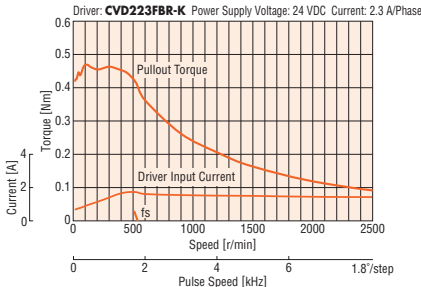


**PKP245D08A2/ PKP245D08B2**

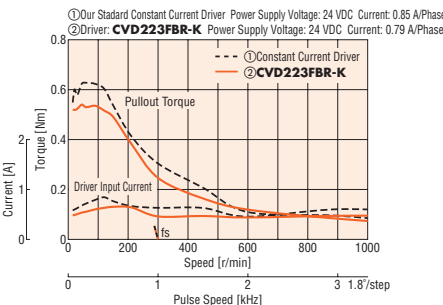


**PKP245D15A2/ PKP245D15B2**

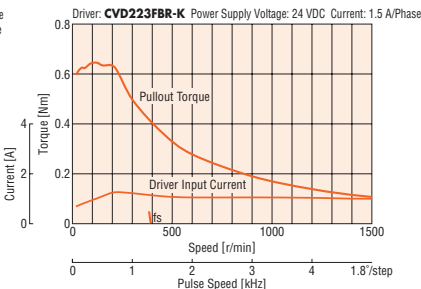


**PKP245D23A2/ PKP245D23B2**

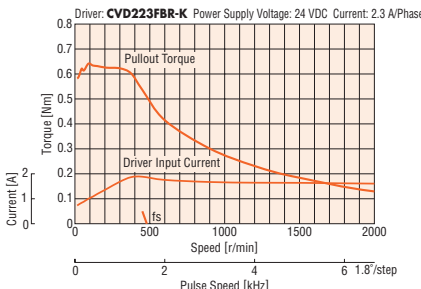

**PKP246D15A2/ PKP246D15B2**

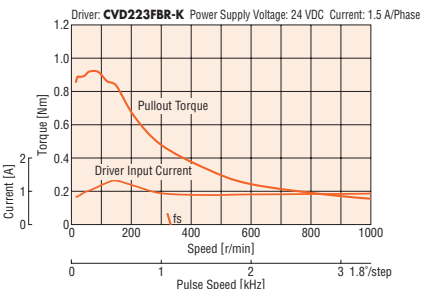

**PKP246D23A2/ PKP246D23B2**

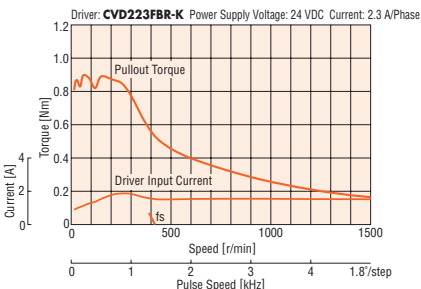

#### Note

- Data for the speed – torque characteristics is based on Oriental Motor's internal measurement conditions. If the conditions are changed, the characteristics may also change as a result.
- Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C max.
- The characteristics are the same when RS-485 communication type driver is used in combination.

## Dimensions (Unit: mm)

### Motor

Product Name	L1	L2	Mass [kg]
<b>PKP243D08A2</b>	33	—	0.23
<b>PKP243D08B2</b>		48	
<b>PKP243D15A2</b>		—	
<b>PKP243D15B2</b>		48	
<b>PKP243D23A2</b>		—	
<b>PKP243D23B2</b>		48	
<b>PKP244D08A2</b>	39	—	0.3
<b>PKP244D08B2</b>		54	
<b>PKP244D15A2</b>		—	
<b>PKP244D15B2</b>		54	
<b>PKP244D23A2</b>		—	
<b>PKP244D23B2</b>		54	
<b>PKP245D08A2</b>	47	—	0.37
<b>PKP245D08B2</b>		62	
<b>PKP245D15A2</b>		—	
<b>PKP245D15B2</b>		62	
<b>PKP245D23A2</b>		—	
<b>PKP245D23B2</b>		62	
<b>PKP246D15A2</b>	59	—	0.5
<b>PKP246D15B2</b>		74	
<b>PKP246D23A2</b>		—	
<b>PKP246D23B2</b>		74	

#### ● Applicable Connector

Connector Housing: MDF97A-5S-3.5C (HIROSE ELECTRIC CO., LTD.)


Contact: MDF97-22SC (HIROSE ELECTRIC CO., LTD.)

Crimp Tool: HT801/MDF97-22S (HIROSE ELECTRIC CO., LTD.)

### ● Connection Cable (Sold separately)

#### ◇ Motor Connection Cable


Product Name	Length L [m]
<b>LC2B06E</b>	0.6
<b>LC2B10E</b>	1

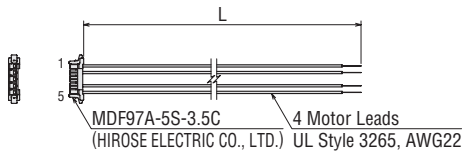

## Inner Wiring Diagram of Motor

Wiring Diagram No.: Model A①

● See "Inner Wiring Diagram of Motor" page for the inner wiring diagram of the motor.

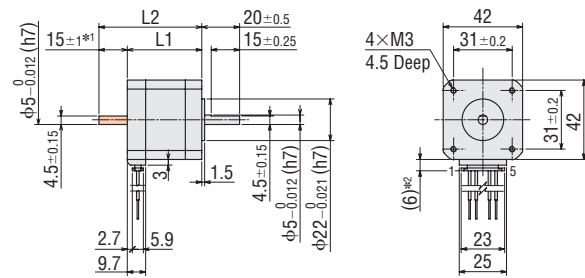

\*1 The length of the shaft flat on the double shaft model is  $15 \pm 0.25$ .

\*2 With connection cable

● These dimensions are for double shaft motors.

For single shaft motors, ignore the shaded areas.

### 2-Phase Motors PKP

#### Features Product Line

#### Product Number Product Line

#### Standard Type

#### High-Resolution Type

#### Flat Type

#### SH Geared Type

#### CS Geared Type

#### Common Specifications

#### Inner Wiring of Motor

### 5-Phase Motors PKP

#### Features Product Line

#### Product Number Product Line

#### Standard Type

#### High-Resolution Type

#### TS Geared Type

#### Common Specifications

#### Motor Pin Arrangement

### Drivers for 2-Phase/5-Phase Motors

### Cables

### Peripheral Equipment

- Motor  
Frame Size
- 13 mm
- 20 mm
- 28 mm
- 35 mm
- 42 mm
- 56.4 mm
- 60 mm
- 61 mm
- 85 mm
- 90 mm

# Standard Type Frame Size 42 mm (Bipolar 4 lead wires)

## Connector Type


## Specifications

Product Name	Maximum Holding Torque Nm	Rotor Inertia J: kgm <sup>2</sup>	Rated Current A/Phase	Voltage VDC	Winding Resistance Ω/Phase	Inductance mH/Phase	Basic Step Angle	Recommended Driver Product Name*
PKP243D15□	0.35	36×10 <sup>-7</sup>	1.5	2.85	1.9	5	1.8°	CVD215BR-K
PKP243D23□			2.3	1.93	0.84	2.1		CVD223BR-K
PKP244D15□	0.48	57×10 <sup>-7</sup>	1.5	3.9	2.6	4.9		CVD215BR-K
PKP244D23□			2.3	2.34	1.02	2.1		CVD223BR-K
PKP245D15□	0.58	83×10 <sup>-7</sup>	1.5	3.6	2.4	6.6		CVD215BR-K
PKP245D23□			2.3	2.57	1.12	2.9		CVD223BR-K
PKP246D15□	0.93	114×10 <sup>-7</sup>	1.5	5.8	3.87	8		CVD215BR-K
PKP246D23□			2.3	3.45	1.5	3.5		CVD223BR-K


- The box □ in the product name indicates the shaft **A** (single shaft) or **B** (double shaft).
  - \*See "Drivers for 2-Phase / 5-Phase Motors" page for drivers that can be used in combination.
- Note
- Be sure to set the driver current at or below the motor rated current. If the motor rated current is exceeded, the product will be damaged.

## Speed – Torque Characteristics (Reference values) fs: Max. Starting Frequency


PKP243D15A/PKP243D15B

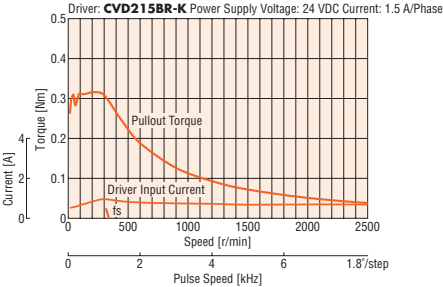


PKP243D23A/PKP243D23B

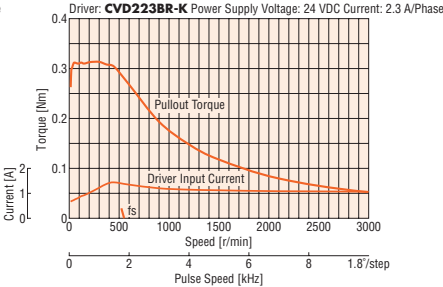


PKP244D15A/PKP244D15B

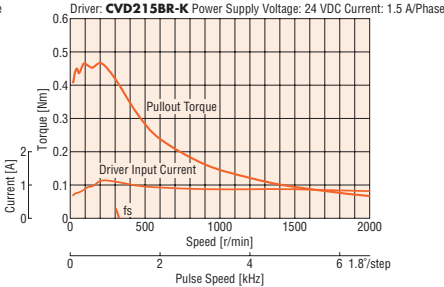


PKP244D23A/PKP244D23B

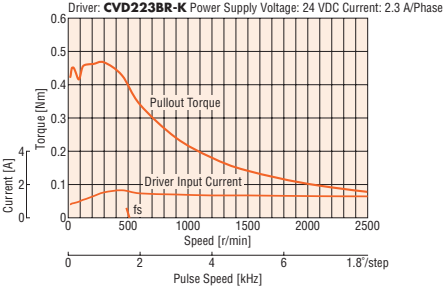


PKP245D15A/PKP245D15B

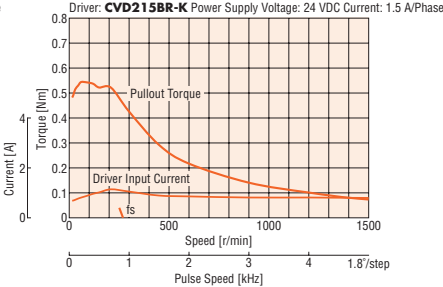


PKP245D23A/PKP245D23B

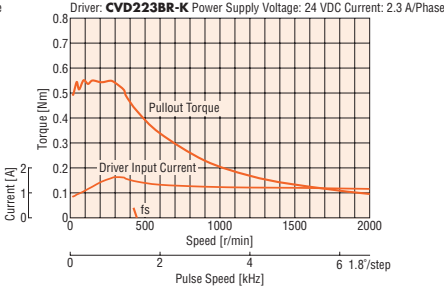

PKP246D15A/PKP246D15B

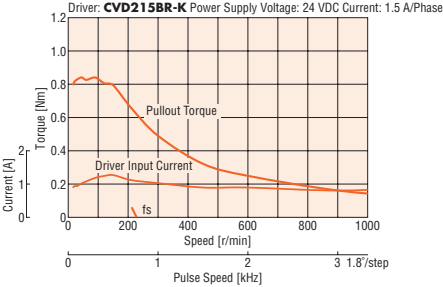

PKP246D23A/PKP246D23B

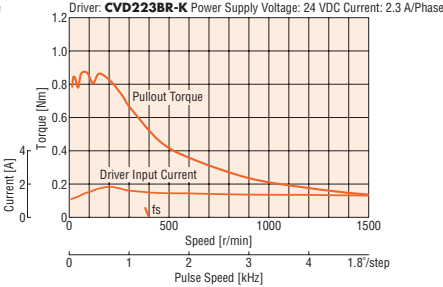

- Note
- Data for the speed – torque characteristics is based on Oriental Motor's internal measurement conditions. If the conditions are changed, the characteristics may also change as a result.
  - Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C or less.
  - The characteristics are the same if combined with an RS-485 communication type driver.

## Dimensions (Unit: mm)

### Motor


Product Name	L1	L2	Mass [kg]
<b>PKP243D15A</b>	33	—	0.25
<b>PKP243D15B</b>		48	
<b>PKP243D23A</b>		—	
<b>PKP243D23B</b>		48	
<b>PKP244D15A</b>	39	—	0.3
<b>PKP244D15B</b>		54	
<b>PKP244D23A</b>		—	
<b>PKP244D23B</b>		54	
<b>PKP245D15A</b>	47	—	0.39
<b>PKP245D15B</b>		62	
<b>PKP245D23A</b>		—	
<b>PKP245D23B</b>		62	
<b>PKP246D15A</b>	59	—	0.5
<b>PKP246D15B</b>		74	
<b>PKP246D23A</b>		—	
<b>PKP246D23B</b>		74	

- Applicable Connector (Molex)  
Connector Housing: 51103-0600 (Molex)  
Contact: 50351-8100 (Molex)  
Crimp Tool: 57295-5000 (Molex)

### Connection Cable (Sold separately)

#### Motor Connection Cable


Product Name	Length L [m]
<b>LC2B06B</b>	0.6
<b>LC2B10B</b>	1

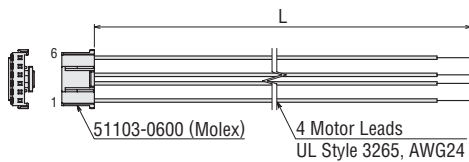

## Inner Wiring Diagram of Motor

Wiring Diagram No.: Model B③

- Refer to the motor inner wiring page for an inner wiring diagram of the motor.

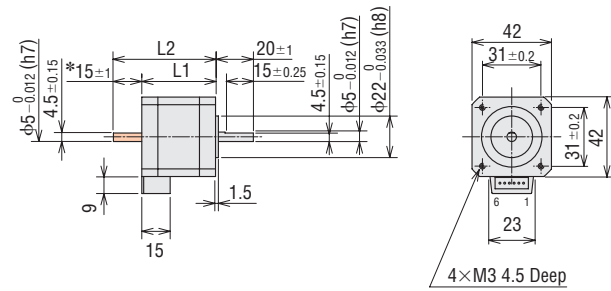

\*The length of the shaft flat on the double shaft model is  $15 \pm 0.25$ .

- These dimensions are for double shaft motors.

For single shaft motors, ignore the shaded areas.

### 2-Phase Motors PKP

#### Features Product Line

#### Product Number Product Line

#### Standard Type

#### High-Resolution Type

#### Flat Type

#### SH Geared Type

#### CS Geared Type

#### Common Specifications

#### Inner Wiring of Motor

### 5-Phase Motors PKP

#### Features Product Line

#### Product Number Product Line

#### Standard Type

#### High-Resolution Type

#### TS Geared Type

#### Common Specifications

#### Motor Pin Arrangement

### Drivers for 2-Phase/5-Phase Motors

### Cables

### Peripheral Equipment

Motor  
Frame Size

13 mm

20 mm

28 mm

35 mm

42 mm

56.4 mm

60 mm

61 mm

85 mm

90 mm

# Standard Type

## Frame Size 42 mm (Unipolar 5 lead wires)

### Mini-Connector Type


### Specifications

Product Name	Maximum Holding Torque Nm	Rotor Inertia J: kgm <sup>2</sup>	Rated Current A/Phase	Voltage VDC	Winding Resistance Ω/Phase	Inductance mH/Phase	Basic Step Angle	Recommended Driver Product Name*
<b>PKP243U08□2</b>	0.26	36×10 <sup>-7</sup>	0.8	5.3	6.6	5.3	1.8°	<b>CMD2109P</b>
<b>PKP243U09□2</b>			0.95	4.5	4.7	3.7		<b>CMD2109P</b>
<b>PKP243U12□2</b>			1.2	3.2	2.7	2.4		<b>CMD2112P</b>
<b>PKP244U08□2</b>	0.39	54×10 <sup>-7</sup>	0.8	7.1	8.9	8.4		<b>CMD2109P</b>
<b>PKP244U12□2</b>			1.2	4.8	4	3.7		<b>CMD2112P</b>
<b>PKP245U08□2</b>	0.49	73×10 <sup>-7</sup>	0.8	6.4	8	8.3		<b>CMD2109P</b>
<b>PKP245U12□2</b>			1.2	3.8	3.2	3.7		<b>CMD2112P</b>
<b>PKP246U12□2</b>	0.75	110×10 <sup>-7</sup>	1.2	6.1	5.1	6		<b>CMD2112P</b>
<b>PKP246U16□2</b>			1.6	4.5	2.8	3.3		<b>CMD2120P</b>


- The box □ in the product name indicates the shaft **A** (single shaft) or **B** (double shaft).
- \*See "Drivers for 2-Phase / 5-Phase Motors" page for details on the recommended drivers.
- [Note]**
- Be sure to set the driver current at or below the motor rated current. If the motor rated current is exceeded, the product will be damaged.

### Speed – Torque Characteristics (Reference values) fs: Max. Starting Frequency


PKP243U08A2/ PKP243U08B2

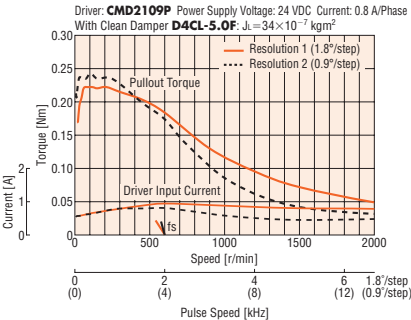


PKP243U09A2/ PKP243U09B2

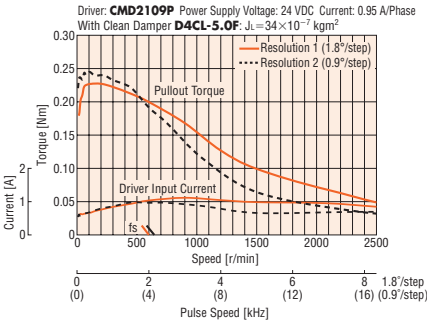


PKP243U12A2/ PKP243U12B2

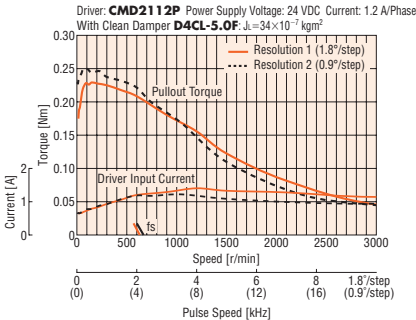


PKP244U08A2/ PKP244U08B2

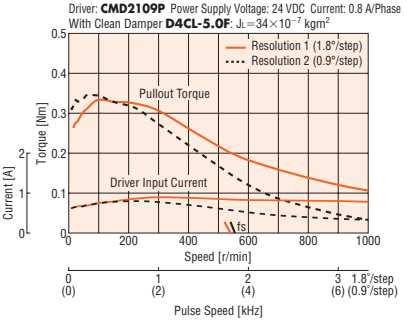


PKP244U12A2/ PKP244U12B2

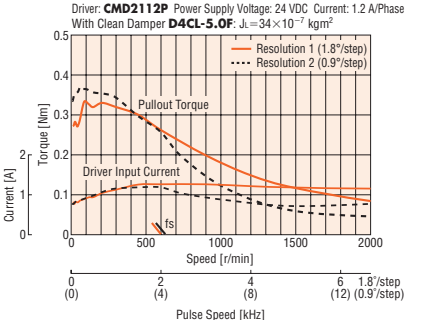


PKP245U08A2/ PKP245U08B2

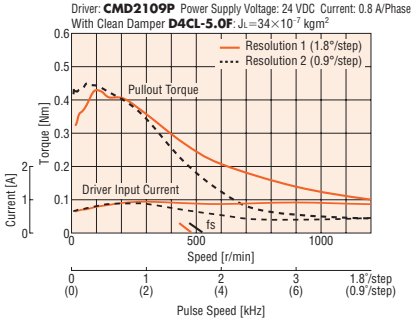


PKP245U12A2/ PKP245U12B2

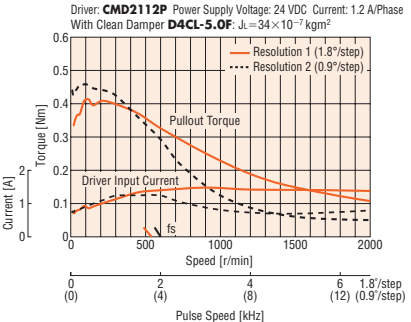

PKP246U12A2/ PKP246U12B2

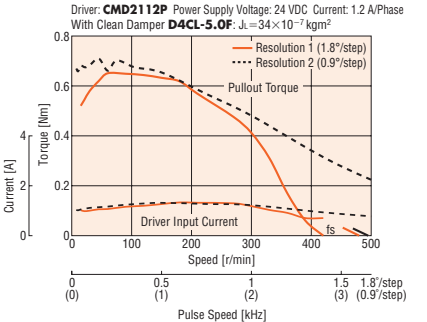

PKP246U16A2/ PKP246U16B2

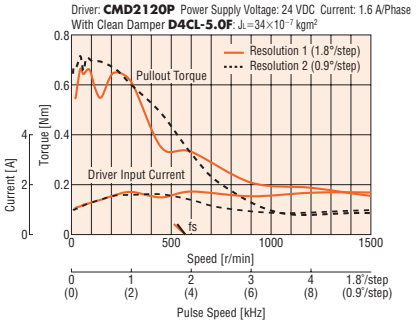

- [Note]**
- Data for the speed – torque characteristics is based on Oriental Motor's internal measurement conditions. If the conditions are changed, the characteristics may also change as a result.
- If there is a "clean damper" entry in the speed – torque characteristics, the data is for a double shaft motor when a clean damper is equipped.
- Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C max.



## ■ Dimensions (Unit: mm)

### ● Motor

Product Name	L1	L2	Mass [kg]
<b>PKP243U08A2</b>	33	—	0.23
<b>PKP243U08B2</b>		48	
<b>PKP243U09A2</b>		—	
<b>PKP243U09B2</b>		48	
<b>PKP243U12A2</b>		—	
<b>PKP243U12B2</b>		48	
<b>PKP244U08A2</b>	39	—	0.3
<b>PKP244U08B2</b>		54	
<b>PKP244U12A2</b>		—	
<b>PKP244U12B2</b>		54	
<b>PKP245U08A2</b>	47	—	0.37
<b>PKP245U08B2</b>		62	
<b>PKP245U12A2</b>		—	
<b>PKP245U12B2</b>		62	
<b>PKP246U12A2</b>	59	—	0.5
<b>PKP246U12B2</b>		74	
<b>PKP246U16A2</b>		—	
<b>PKP246U16B2</b>		74	

#### ● Applicable Connector

Connector Housing: MDF97A-5S-3.5C (HIROSE ELECTRIC CO., LTD.)



Contact: MDF97-22SC (HIROSE ELECTRIC CO., LTD.)

Crimp Tool: HT801/MDF97-22S (HIROSE ELECTRIC CO., LTD.)

### ● Connection Cable (Sold separately)

#### ◇ Motor Connection Cable

Product Name	Length L [m]
<b>LC2U06E</b>	0.6
<b>LC2U10E</b>	1

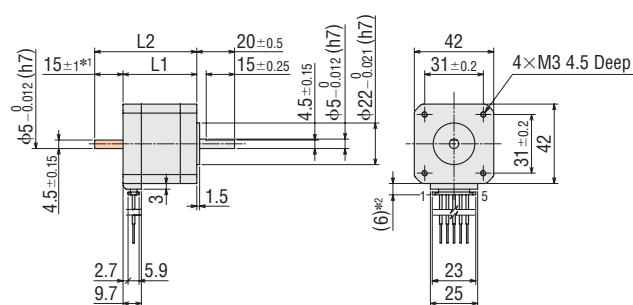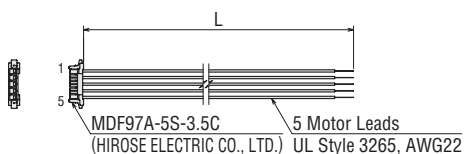

\*1 The length of the shaft flat on the double shaft model is 15±0.25.

\*2 With connection cable

● These dimensions are for double shaft motors.

For single shaft motors, ignore the shaded areas.

## ■ Inner Wiring Diagram of Motor

Wiring Diagram No.: Model A②

● See "Inner Wiring Diagram of Motor" page for the inner wiring diagram of the motor.

2-Phase  
Motors  
PKP

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

Flat  
Type

SH Geared  
Type

CS Geared  
Type

Common  
Specifications

Inner  
Wiring  
of Motor

5-Phase  
Motors  
PKP

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

TS Geared  
Type

Common  
Specifications

Motor  
Pin  
Arrangement

Drivers for  
2-Phase/5-Phase  
Motors

Cables

Peripheral  
Equipment

Motor  
Frame Size

13 mm

20 mm

28 mm

35 mm

42 mm

56.4 mm

60 mm

61 mm

85 mm

90 mm

# Standard Type Frame Size 42 mm (Unipolar 6 lead wires)

## Connector Type


## Specifications

Product Name	Maximum Holding Torque Nm	Rotor Inertia J: kgm <sup>2</sup>	Rated Current A/Phase	Voltage VDC	Winding Resistance Ω/Phase	Inductance mH/Phase	Basic Step Angle	Recommended Driver Product Name*
PKP243U04□	0.25	36×10 <sup>-7</sup>	0.4	12	30	33	1.8°	CMD2109P
PKP243U06□			0.6	6.6	11	12.4		
PKP243U09□			0.95	4.47	4.7	5		
PKP244U04□	0.36	57×10 <sup>-7</sup>	0.4	12	30	28.6		CMD2109P
PKP244U08□			0.8	5.76	7.2	7.6		
PKP244U12□			1.2	4.8	4	3.9		
PKP245U05□	0.45	83×10 <sup>-7</sup>	0.5	12	24	33		CMD2109P
PKP245U08□			0.8	6.4	8	11.3		
PKP245U12□			1.2	4.56	3.8	5		
PKP246U12□	0.75	114×10 <sup>-7</sup>	1.2	7.2	6	6.5		CMD2112P


- The box □ in the product name indicates the shaft **A** (single shaft) or **B** (double shaft).
- \*See "Drivers for 2-Phase / 5-Phase Motors" page for details on the recommended drivers.
- Note**
- Be sure to set the driver current at or below the motor rated current. If the motor rated current is exceeded, the product will be damaged.

## Speed – Torque Characteristics (Reference values) fs: Max. Starting Frequency


PKP243U04A/PKP243U04B

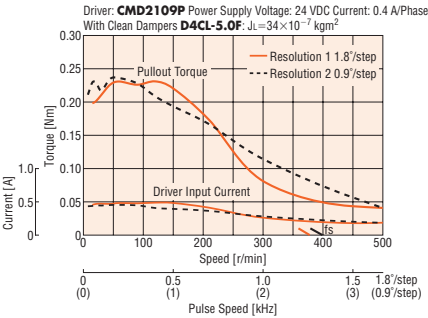


PKP243U06A/PKP243U06B

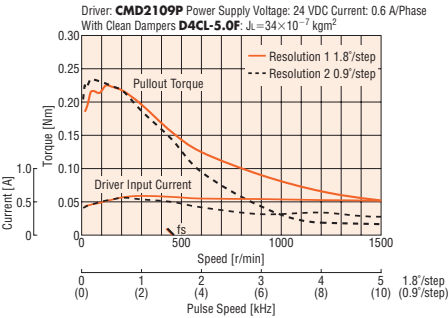


PKP243U09A/PKP243U09B

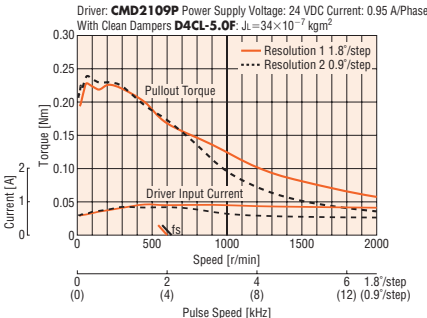


PKP244U04A/PKP244U04B

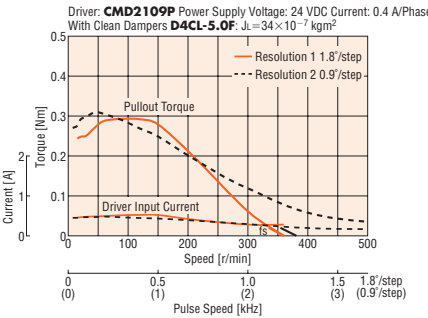

PKP244U08A/PKP244U08B

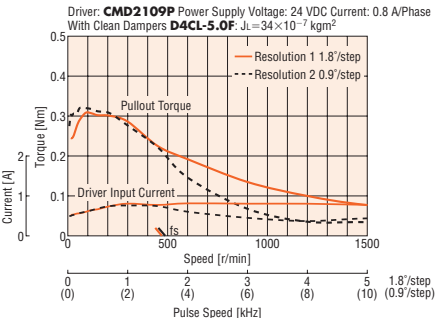


PKP244U12A/PKP244U12B

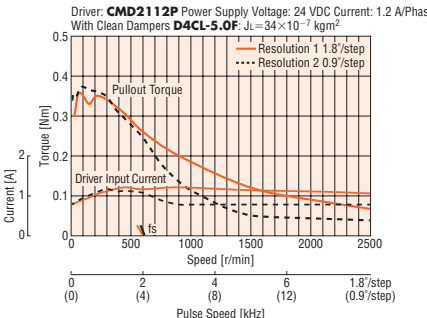


- Note**
- Data for the speed – torque characteristics is based on Oriental Motor's internal measurement conditions. If the conditions are changed, the characteristics may also change as a result.
- If there is a "clean damper" entry in the speed - torque characteristics, the data is for a double shaft motor when a clean damper is equipped.
- Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C or less.

## Speed – Torque Characteristics (Reference values) $f_s$ : Max. Starting Frequency


PKP245U05A/PKP245U05B

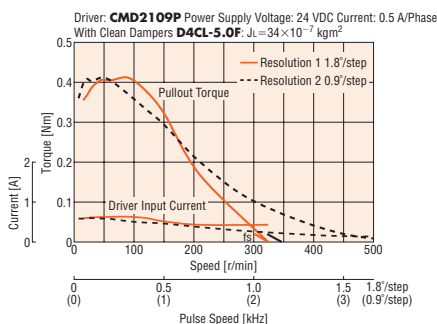


PKP245U08A/PKP245U08B

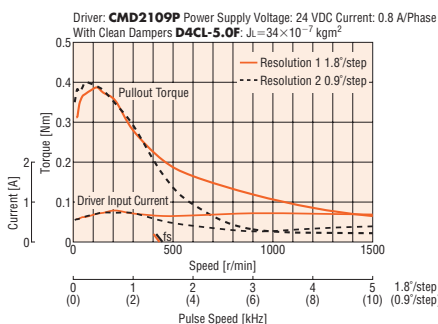

PKP245U12A/PKP245U12B

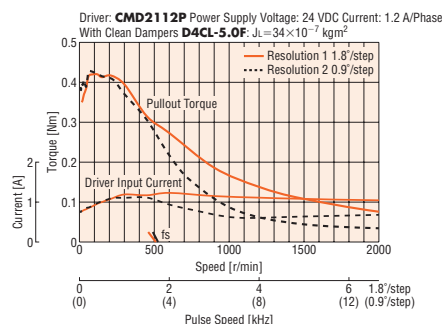

PKP246U12A/PKP246U12B

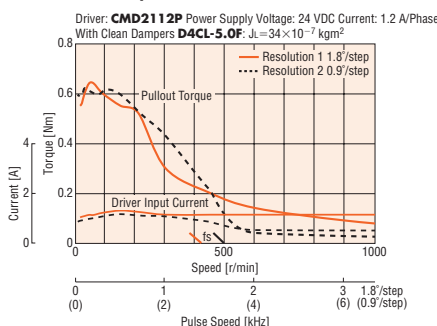

### Note


- Data for the speed – torque characteristics is based on Oriental Motor's internal measurement conditions. If the conditions are changed, the characteristics may also change as a result.
- If there is a "clean damper" entry in the speed - torque characteristics, the data is for a double shaft motor when a clean damper is equipped.
- Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C or less.

## Dimensions (Unit: mm)

### ● Motor

Product Name	L1	L2	Mass [kg]
PKP243U04A	33	—	0.25
PKP243U04B		48	
PKP243U06A		—	
PKP243U06B		48	
PKP243U09A		—	
PKP243U09B		48	
PKP244U04A	39	—	0.3
PKP244U04B		54	
PKP244U08A		—	
PKP244U08B		54	
PKP244U12A		—	
PKP244U12B		54	
PKP245U05A	47	—	0.39
PKP245U05B		62	
PKP245U08A		—	
PKP245U08B		62	
PKP245U12A		—	
PKP245U12B		62	
PKP246U12A	59	—	0.5
PKP246U12B		74	

- Applicable Connector (Molex)  
Connector Housing: 51103-0600 (Molex)  
Contact: 50351-8100 (Molex)  
Crimp Tool: 57295-5000 (Molex)

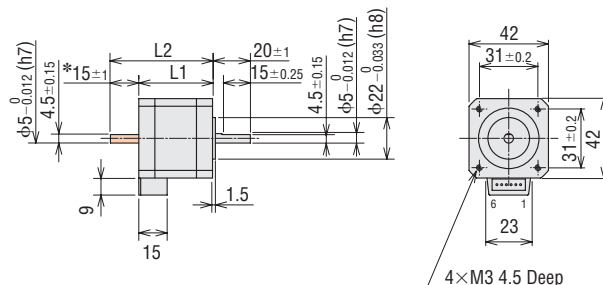


\*The length of the shaft flat on the double shaft model is  $15 \pm 0.25$ .

- These dimensions are for double shaft motors.  
For single shaft motors, ignore the shaded areas.

### ● Connection Cable (Sold separately)

#### ◇ Motor Connection Cable

Product Name	Length L [m]
LC2U06B	0.6
LC2U10B	1

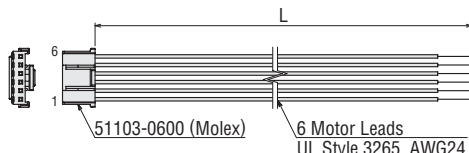

## Inner Wiring Diagram of Motor

Wiring Diagram No.: Model B④

- Refer to the motor inner wiring page for an inner wiring diagram of the motor.

2-Phase  
Motors  
PKP

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

Flat  
Type

SH Geared  
Type

CS Geared  
Type

Common  
Specifications

Inner  
Wiring  
of Motor

5-Phase  
Motors  
PKP

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

TS Geared  
Type

Common  
Specifications

Motor  
Pin  
Arrangement

Drivers for  
2-Phase/5-Phase  
Motors

Cables

Peripheral  
Equipment

Motor  
Frame Size

13 mm

20 mm

28 mm

35 mm

42 mm

56.4 mm

60 mm

61 mm

85 mm

90 mm

# Standard Type with Encoder

## Frame Size 42 mm (Bipolar 4 lead wires)

### Mini-Connector Type


### Specifications

Product Name	Maximum Holding Torque Nm	Rotor Inertia J: kgm <sup>2</sup>	Rated Current A/Phase	Voltage VDC	Winding Resistance Ω/Phase	Inductance mH/Phase	Basic Step Angle	Recommended Driver Product Name*
<b>PKP243D08A2-R3</b> <span>□</span> <span>■</span>	0.35	37×10 <sup>-7</sup>	0.85	4.6	5.4	10	1.8°	<b>CVD223FBR-K</b>
<b>PKP243D15A2-R3</b> <span>□</span> <span>■</span>			1.5	2.7	1.8	3.3		
<b>PKP243D23A2-R3</b> <span>□</span> <span>■</span>			2.3	1.8	0.78	1.4		
<b>PKP244D08A2-R3</b> <span>□</span> <span>■</span>	0.48	55×10 <sup>-7</sup>	0.85	5.7	6.7	14		
<b>PKP244D15A2-R3</b> <span>□</span> <span>■</span>			1.5	3.2	2.1	4.4		
<b>PKP244D23A2-R3</b> <span>□</span> <span>■</span>			2.3	2.1	0.93	1.9		
<b>PKP245D08A2-R3</b> <span>□</span> <span>■</span>	0.66	74×10 <sup>-7</sup>	0.85	6	7.1	16		
<b>PKP245D15A2-R3</b> <span>□</span> <span>■</span>			1.5	3.3	2.2	5.3		
<b>PKP245D23A2-R3</b> <span>□</span> <span>■</span>			2.3	2.3	1	2.2		
<b>PKP246D15A2-R3</b> <span>□</span> <span>■</span>	0.99	111×10 <sup>-7</sup>	1.5	4.4	2.9	7.9		
<b>PKP246D23A2-R3</b> <span>□</span> <span>■</span>			2.3	3.2	1.4	3.3		


- A letter “E” (200 P/R) or “F” (400 P/R) indicating the encoder resolution is specified where the box □ is located in the product name.
  - A letter “E” (200 P/R), F (400 P/R) or “J” (1000 P/R) indicating the encoder resolution is specified where the box ■ is located in the product name.
  - A letter “L” (line driver output) indicating the encoder output circuit configuration is specified where the box ■ is located in the product name. For voltage output, there is no letter in the ■ box.
  - Refer to the common specifications page for encoder specifications.
  - \*See “Drivers for 2-Phase / 5-Phase Motors” page for drivers that can be used in combination.
- Note
- Be sure to set the driver current at or below the motor rated current. If the motor rated current is exceeded, the product will be damaged.

### Speed - Torque Characteristics (Reference values) fs: Max. Starting Frequency


PKP243D08A2-R3□■

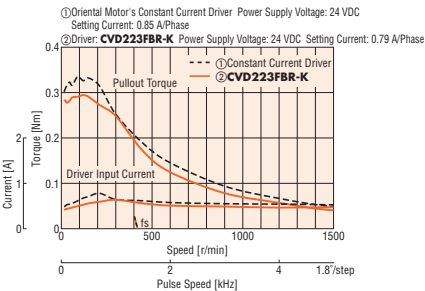


PKP243D15A2-R3□■

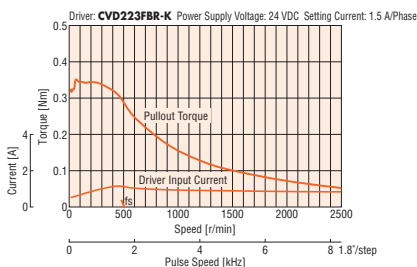


PKP243D23A2-R3□■

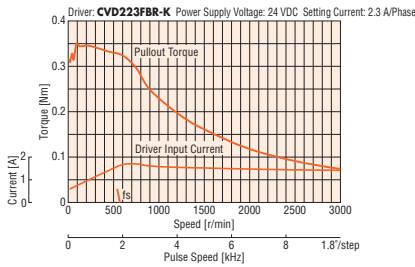


PKP244D08A2-R3□■

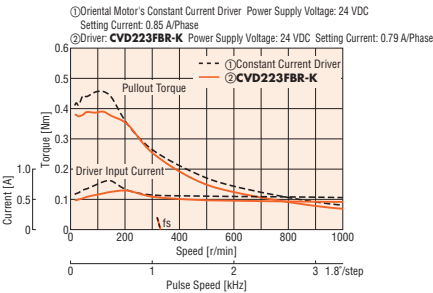


PKP244D15A2-R3□■

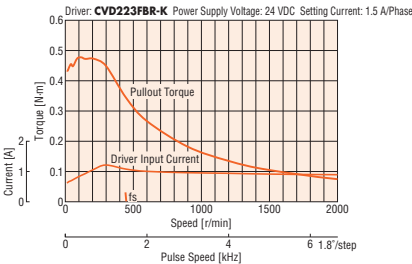


PKP244D23A2-R3□■

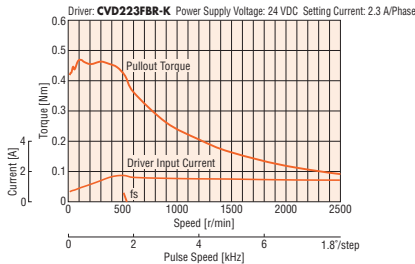


PKP245D08A2-R3□■

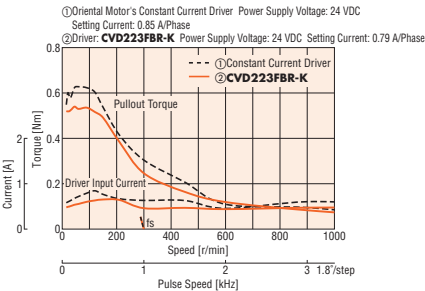

PKP245D15A2-R3□■

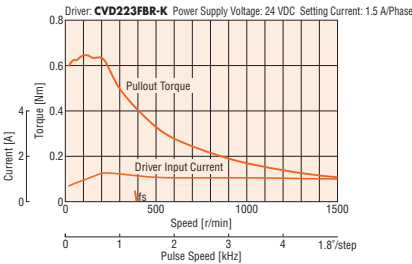

PKP245D23A2-R3□■

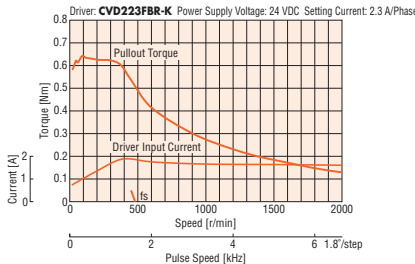


#### Note

- Data for the speed – torque characteristics is based on Oriental Motor's internal measurement conditions. If the conditions are changed, the characteristics may also change as a result.
- Depending on the driving conditions, a considerable amount of heat may be generated by the motor. To protect the encoder, be sure to keep the motor case temperature at 85°C max.
- The characteristics are the same if combined with an RS-485 communication type driver.


- A letter “E” (200 P/R) or “F” (400 P/R) indicating the encoder resolution is specified where the box □ is located in the product name.
- A letter “E” (200 P/R), F (400 P/R) or “J” (1000 P/R) indicating the encoder resolution is specified where the box ■ is located in the product name.
- A letter “L” (line driver output) indicating the encoder output circuit configuration is specified where the box ■ is located in the product name. For voltage output, there is no letter in the ■ box.

## Speed - Torque Characteristics (Reference values) fs: Max. Starting Frequency

### PKP246D15A2-R3

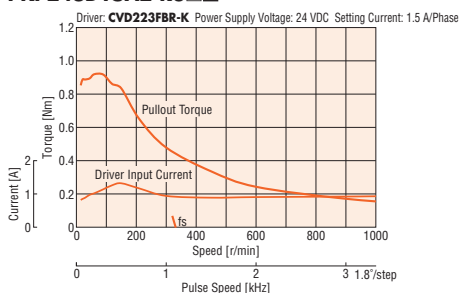

### PKP246D23A2-R3

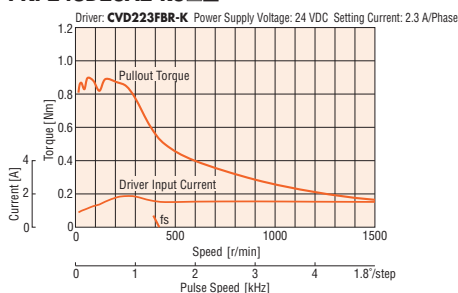


#### Note

- Data for the speed – torque characteristics is based on Oriental Motor's internal measurement conditions. If the conditions are changed, the characteristics may also change as a result.
- Depending on the driving conditions, a considerable amount of heat may be generated by the motor. To protect the encoder, be sure to keep the motor case temperature at 85°C max.
- The characteristics are the same if combined with an RS-485 communication type driver.

## Dimensions (Unit = mm)

### Motor

Product Name	L	Mass [kg]
PKP243D08A2-R3	46.5	0.25
PKP243D15A2-R3		
PKP243D23A2-R3		
PKP244D08A2-R3	52.5	0.32
PKP244D15A2-R3		
PKP244D23A2-R3	60.5	0.39
PKP245D08A2-R3		
PKP245D15A2-R3		
PKP245D23A2-R3	72.5	0.52
PKP246D15A2-R3		
PKP246D23A2-R3		

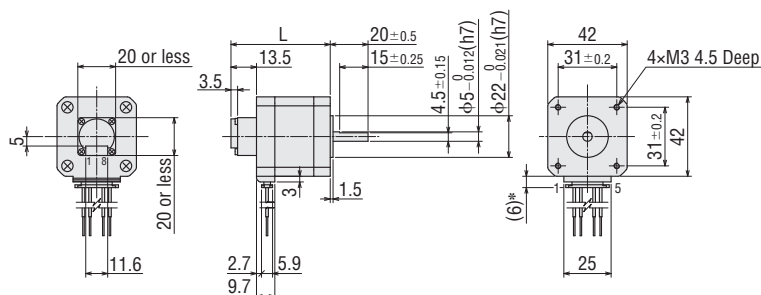


#### ● Applicable Connector (Molex)

	Motor (HIROSE ELECTRIC CO., LTD.)	Encoder (Molex)
Connector Housing	MDF97A-5S-3.5C	51021-0800
Contact	MDF97-22SC	50079-8100
Crimp Tool	HT801/MDF97-22S	57177-5000

### Connection Cable (Sold separately)

#### ◇ Motor Connection Cable

Product Name	Length L [m]
LC2B06E	0.6
LC2B10E	1

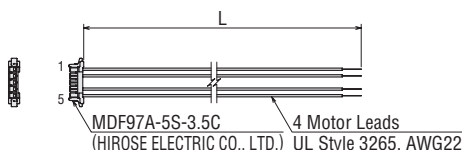

#### ◇ Encoder Connection Cable

##### ● For Voltage Output

Product Name	Length L [m]
LCE05A-006	0.6

##### ● For Line Driver Output

Product Name	Length L [m]
LCE08A-006	0.6

● Refer to the cables page for dimensions.

## Inner Wiring Diagram of Motor

Wiring Diagram No.: Model A①

- Refer to the motor inner wiring page for an inner wiring diagram of the motor.

- A letter "E" (200 P/R) or "F" (400 P/R) indicating the encoder resolution is specified where the box □ is located in the product name.
- A letter "E" (200 P/R), "F" (400 P/R) or "J" (1000 P/R) indicating the encoder resolution is specified where the box ■ is located in the product name.
- A letter "L" (line driver output) indicating the encoder output circuit configuration is specified where the box ■ is located in the product name. For voltage output, there is no letter in the ■ box.

### 2-Phase Motors PKP

#### Features Product Line

#### Product Number Product Line

#### Standard Type

#### High-Resolution Type

#### Flat Type

#### SH Geared Type

#### CS Geared Type

#### Common Specifications

#### Inner Wiring of Motor

### 5-Phase Motors PKP

#### Features Product Line

#### Product Number Product Line

#### Standard Type

#### High-Resolution Type

#### TS Geared Type

#### Common Specifications

#### Motor Pin Arrangement

### Drivers for 2-Phase/5-Phase Motors

#### Cables

#### Peripheral Equipment

- Motor  
Frame Size
- 13 mm
  - 20 mm
  - 28 mm
  - 35 mm
  - 42 mm
  - 56.4 mm
  - 60 mm
  - 61 mm
  - 85 mm
  - 90 mm

# Standard Type with Electromagnetic Brake

## Frame Size 42 mm (Bipolar 4 lead wires)


### Mini-Connector Type

### Specifications

Product Name	Maximum Holding Torque Nm	Rotor Inertia J: kgm <sup>2</sup>	Rated Current A/Phase	Voltage VDC	Winding Resistance Ω/Phase	Inductance mH/Phase	Basic Step Angle	Electromagnetic Brake Static Friction Torque Nm
<b>PKP243D23M2</b>	0.35	48×10 <sup>-7</sup> *	2.3	1.8	0.78	1.4	1.8°	0.3
<b>PKP244D23M2</b>	0.48	66×10 <sup>-7</sup> *		2.1	0.93	1.9		
<b>PKP245D23M2</b>	0.66	85×10 <sup>-7</sup> *		2.3	1	2.2		
<b>PKP246D23M2</b>	0.99	120×10 <sup>-7</sup> *		3.2	1.4	3.3		

- Refer to the common specification page for electromagnetic brake specifications.
  - \*The Inertia of the electromagnetic brake is included in the value.
- Note**
- Be sure to set the driver current at or below the motor rated current. If the motor rated current is exceeded, the product will be damaged.

### Speed – Torque Characteristics (Reference values) fs: Max. Starting Frequency

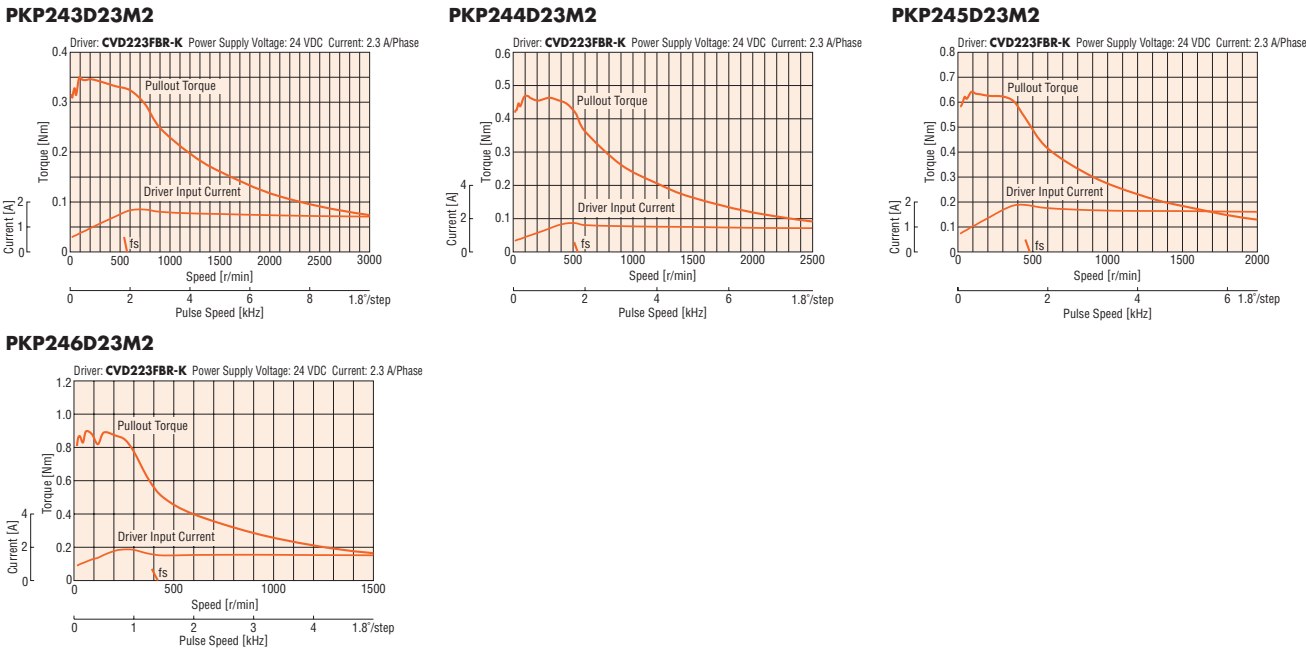

- Note**
- Data for the speed – torque characteristics is based on Oriental Motor's internal measurement conditions. If the conditions are changed, the characteristics may also change as a result.
  - Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C max.
  - The characteristics are the same when RS-485 communication type driver is used in combination.


### Dimensions (Unit: mm)

#### Motor

Product Name	L1	L2	Mass [kg]
<b>PKP243D23M2</b>	69	49	0.33
<b>PKP244D23M2</b>	75	55	0.40
<b>PKP245D23M2</b>	83	63	0.47
<b>PKP246D23M2</b>	95	75	0.60

● Applicable Connector

	Motor (HIROSE ELECTRIC CO., LTD.)	Electromagnetic Brake (HIROSE ELECTRIC CO., LTD.)
Connector Housing	MDF97A-5S-3.5C	DF62C-2S-2.2C
Contact	MDF97-22SC	DF62-22SCA
Crimping Tool	HT801/MDF97-22S	HT801/DF62-22(10)

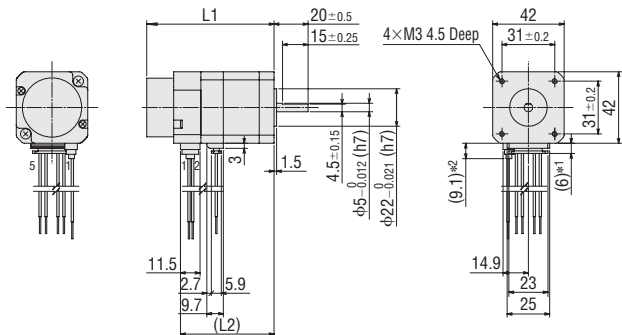


- \*1 With connection cable
- \*2 With electromagnetic brake connection cable

#### Connection Cable (Sold separately)


##### Motor Connection Cable

Product Name	Length L [m]
<b>LC2B06E</b>	0.6
<b>LC2B10E</b>	1

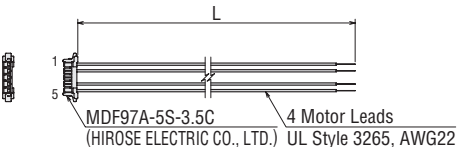

##### Electromagnetic Brake Connection Cable

Product Name	Length L [m]
<b>LCM02A-006</b>	0.6
<b>LCM02A-010</b>	1

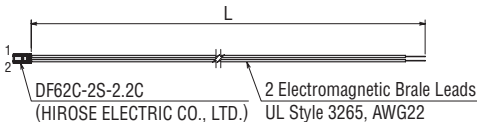

### Inner Wiring Diagram of Motor

Wiring Diagram No.: Model A①

- See "Inner Wiring Diagram of Motor" page for the inner wiring diagram of the motor.



# Standard Type with Electromagnetic Brake

Frame Size 42 mm (Unipolar 6 lead wires)  
Connector Type

## Specifications

Product Name	Maximum Holding Torque Nm	Rotor Inertia J: kgm <sup>2</sup>	Rated Current A/Phase	Voltage VDC	Winding Resistance Ω/Phase	Inductance mH/Phase	Basic Step Angle	Electromagnetic Brake Static Friction Torque Nm
PKP243U09M	0.25	48×10 <sup>-7</sup> *	0.95	4.47	4.7	5	1.8°	0.3
PKP244U12M	0.39	69×10 <sup>-7</sup> *	1.2	4.8	4	3.9		
PKP245U12M	0.45	95×10 <sup>-7</sup> *		4.56	3.8	5		
PKP246U12M	0.75	126×10 <sup>-7</sup> *		7.2	6	6.5		

● Refer to the common specification page for electromagnetic brake specifications.


\*This value is including the electromagnetic brake inertia.

### Note


● Be sure to set the driver current at or below the motor rated current. If the motor rated current is exceeded, the product will be damaged.

## Speed – Torque Characteristics (Reference values) fs: Max. Starting Frequency


### PKP243U09M

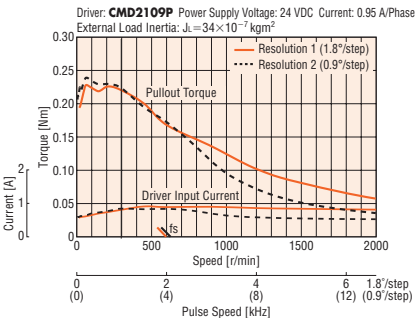


### PKP244U12M

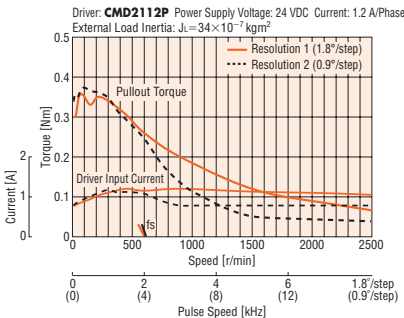

### PKP245U12M

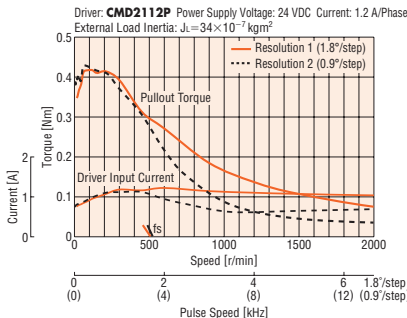

### PKP246U12M

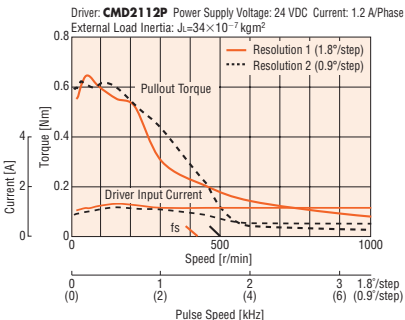

### Note

- Data for the speed – torque characteristics is based on Oriental Motor's internal measurement conditions. If the conditions are changed, the characteristics may also change as a result.
- The data in the speed – torque characteristics represents the use of an external load inertia.
- Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C max.

## Dimensions (Unit: mm)

### Motor



Product Name	L	Mass [kg]
PKP243U09M	67	0.36
PKP244U12M	73	0.41
PKP245U12M	81	0.5
PKP246U12M	93	0.61

- Applicable Connector (Molex)  
Connector Housing: 51103-0600  
Contact: 50351-8100  
Crimp Tool: 57295-5000

### Connection Cable (Sold separately)

#### Motor Connection Cable

Product Name	Length L [m]
LC2U06B	0.6
LC2U10B	1

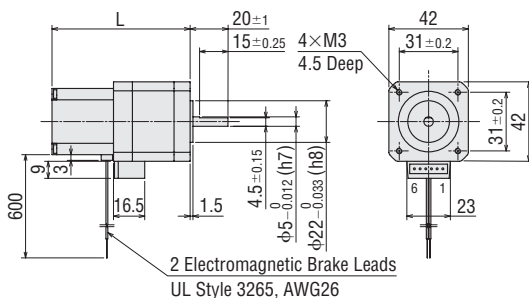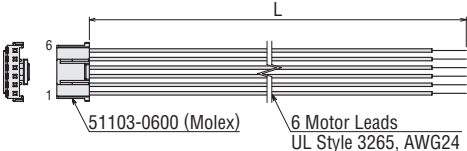

## Inner Wiring Diagram of Motor

Wiring Diagram No.: Model B④

● See "Inner Wiring Diagram of Motor" page for the inner wiring diagram of the motor.

2-Phase  
Motors  
PKP

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

Flat  
Type

SH Geared  
Type

CS Geared  
Type

Common  
Specifications

Inner  
Wiring  
of Motor

5-Phase  
Motors  
PKP

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

TS Geared  
Type

Common  
Specifications

Motor  
Pin  
Arrangement

Drivers for  
2-Phase/5-Phase  
Motors

Cables

Peripheral  
Equipment

Motor  
Frame Size

13 mm

20 mm

28 mm

35 mm

42 mm

56.4 mm

60 mm

61 mm

85 mm

90 mm

# Standard Type

## Frame Size 56.4 mm (Bipolar 4 lead wires)

### Mini-Connector Type


#### Specifications

Product Name	Maximum Holding Torque Nm	Rotor Inertia J: kgm <sup>2</sup>	Rated Current A/Phase	Voltage VDC	Winding Resistance Ω/Phase	Inductance mH/Phase	Basic Step Angle	Recommended Driver Product Name*
<b>PKP264D14□2</b>	0.74	140×10 <sup>-7</sup>	1.4	2.9	2.1	6	1.8°	<b>CVD228BR-K</b>
<b>PKP264D28□2</b>			2.8	1.6	0.57	1.5		<b>CVD242BR-K</b>
<b>PKP264D42□2</b>			4.2	1	0.24	0.65		
<b>PKP266D14□2</b>	1.4	270×10 <sup>-7</sup>	1.4	4.6	3.3	12		<b>CVD228BR-K</b>
<b>PKP266D28□2</b>			2.8	2.4	0.86	2.9		<b>CVD242BR-K</b>
<b>PKP266D42□2</b>			4.2	1.6	0.38	1.3		
<b>PKP268D14□2</b>	2.5	500×10 <sup>-7</sup>	1.4	6.6	4.7	18		<b>CVD228BR-K</b>
<b>PKP268D28□2</b>			2.8	3.4	1.2	4.6		<b>CVD228BR-K</b>
<b>PKP268D42□2</b>			4.2	2.2	0.53	2		<b>CVD242BR-K</b>


- The box □ in the product name indicates the shaft **A** (single shaft) or **B** (double shaft).
  - \*See "Drivers for 2-Phase / 5-Phase Motors" page for drivers that can be used in combination.
- Note
- Be sure to set the driver current at or below the motor rated current. If the motor rated current is exceeded, the product will be damaged.

#### Speed – Torque Characteristics (Reference values) fs: Max. Starting Frequency


PKP264D14A2/ PKP264D14B2

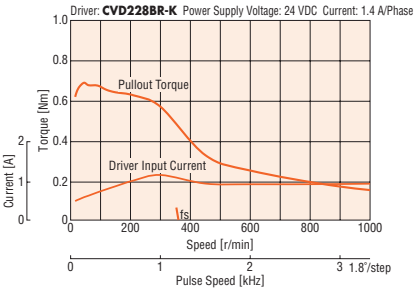


PKP264D28A2/ PKP264D28B2

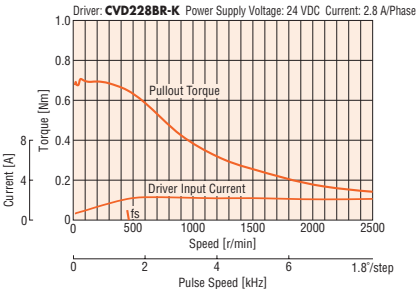


PKP264D42A2/ PKP264D42B2

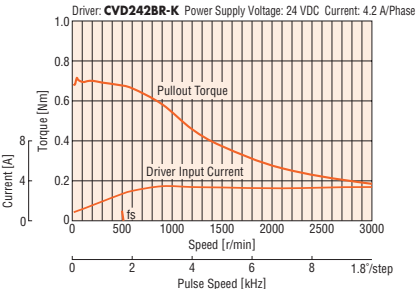


PKP266D14A2/ PKP266D14B2

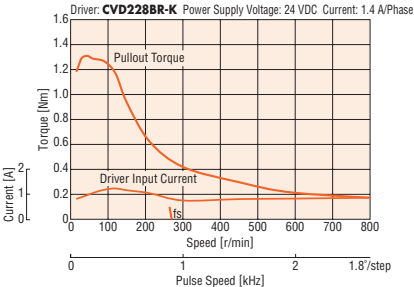


PKP266D28A2/ PKP266D28B2

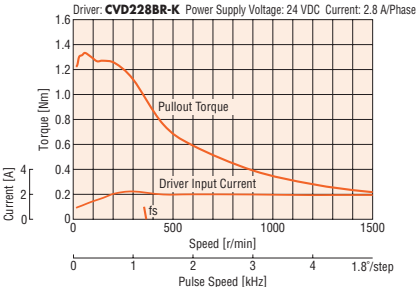


PKP266D42A2/ PKP266D42B2

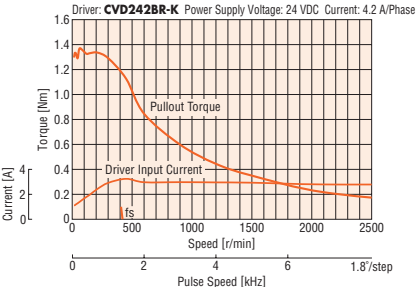


PKP268D14A2/ PKP268D14B2

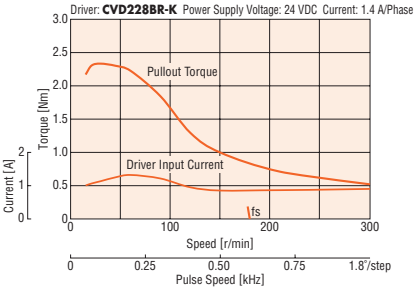

PKP268D28A2/ PKP268D28B2

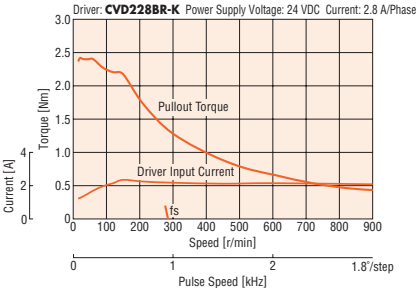

PKP268D42A2/ PKP268D42B2

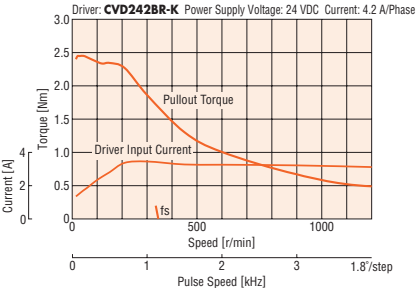

- Note
- Data for the speed – torque characteristics is based on Oriental Motor's internal measurement conditions. If the conditions are changed, the characteristics may also change as a result.
  - Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C max.
  - The characteristics are the same when RS-485 communication type driver is used in combination.

## Dimensions (Unit: mm)

### Motor

Product Name	L1	L2	Mass [kg]
<b>PKP264D14A2</b>	39	—	0.45
<b>PKP264D14B2</b>		62	
<b>PKP264D28A2</b>		—	
<b>PKP264D28B2</b>		62	
<b>PKP264D42A2</b>		—	
<b>PKP264D42B2</b>		62	
<b>PKP266D14A2</b>	54	—	0.7
<b>PKP266D14B2</b>		77	
<b>PKP266D28A2</b>		—	
<b>PKP266D28B2</b>		77	
<b>PKP266D42A2</b>		—	
<b>PKP266D42B2</b>		77	
<b>PKP268D14A2</b>	76	—	1.1
<b>PKP268D14B2</b>		99	
<b>PKP268D28A2</b>		—	
<b>PKP268D28B2</b>		99	
<b>PKP268D42A2</b>		—	
<b>PKP268D42B2</b>		99	

#### ● Applicable Connector

Connector Housing: MDF97A-5S-3.5C (HIROSE ELECTRIC CO., LTD.)


Contact: MDF97-22SC (HIROSE ELECTRIC CO., LTD.)

Crimp Tool: HT801/MDF97-22S (HIROSE ELECTRIC CO., LTD.)

### ● Connection Cable (Sold separately)

#### ◇ Motor Connection Cable


Product Name	Length L [m]
<b>LC2B06E</b>	0.6
<b>LC2B10E</b>	1

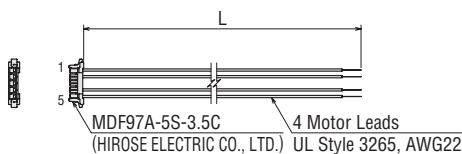

## Inner Wiring Diagram of Motor

Wiring Diagram No.: Model A①

● See "Inner Wiring Diagram of Motor" page for the inner wiring diagram of the motor.

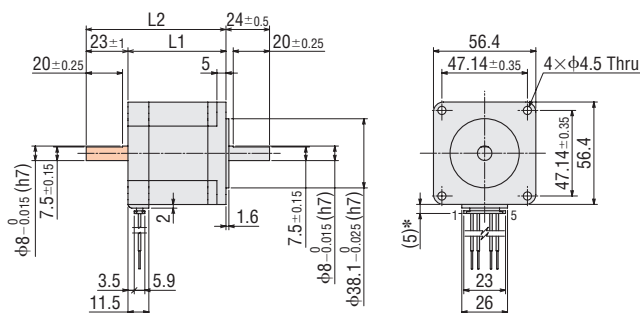

\*With connection cable

● These dimensions are for double shaft motors.

For single shaft motors, ignore the shaded areas.

### 2-Phase Motors PKP

#### Features Product Line

#### Product Number Product Line

#### Standard Type

#### High-Resolution Type

#### Flat Type

#### SH Geared Type

#### CS Geared Type

#### Common Specifications

#### Inner Wiring of Motor

### 5-Phase Motors PKP

#### Features Product Line

#### Product Number Product Line

#### Standard Type

#### High-Resolution Type

#### TS Geared Type

#### Common Specifications

#### Motor Pin Arrangement

#### Drivers for 2-Phase/5-Phase Motors

#### Cables

#### Peripheral Equipment

- Motor  
Frame Size
- 13 mm
- 20 mm
- 28 mm
- 35 mm
- 42 mm
- 56.4 mm
- 60 mm
- 61 mm
- 85 mm
- 90 mm

# Standard Type Frame Size 56.4 mm (Bipolar 4 lead wires)

## Connector Type

## Specifications

Product Name	Maximum Holding Torque Nm	Rotor Inertia J: kgm <sup>2</sup>	Rated Current A/Phase	Voltage VDC	Winding Resistance Ω/Phase	Inductance mH/Phase	Basic Step Angle	Recommended Driver Product Name*
PKP264D28□	0.6	120×10 <sup>-7</sup>	2.8	2	0.73	1.8	1.8°	CVD228BR-K
PKP266D28□	1.4	290×10 <sup>-7</sup>		2.8	1	2.9		
PKP268D28□	2.3	490×10 <sup>-7</sup>		3.4	1.23	4.4		

● The box □ in the product name indicates the shaft **A** (single shaft) or **B** (double shaft).


\*See "Drivers for 2-Phase / 5-Phase Motors" page for drivers that can be used in combination.

### Note


● Be sure to set the driver current at or below the motor rated current. If the motor rated current is exceeded, the product will be damaged.

## Speed – Torque Characteristics (Reference values) fs: Max. Starting Frequency


PKP264D28A/ PKP264D28B

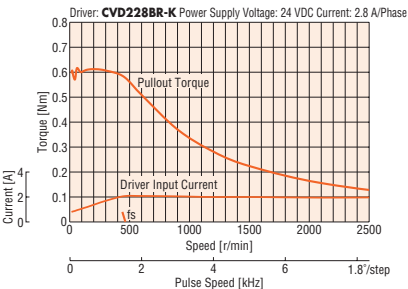

PKP266D28A/ PKP266D28B

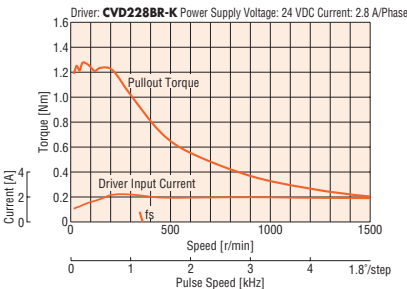

PKP268D28A/ PKP268D28B

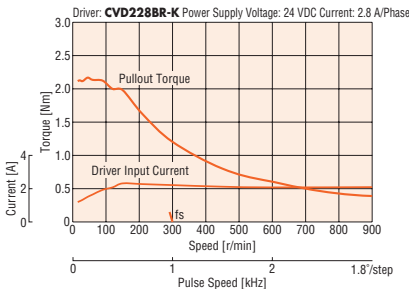

### Note


- Data for the speed – torque characteristics is based on Oriental Motor's internal measurement conditions. If the conditions are changed, the characteristics may also change as a result.
- Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C or less.
- The characteristics are the same if combined with an RS-485 communication type driver.

## Dimensions (Unit: mm)

### ● Motor

Product Name	L1	L2	Mass [kg]
PKP264D28A	39	—	0.46
PKP264D28B		62	
PKP266D28A	54	—	0.73
PKP266D28B		77	
PKP268D28A	76	—	1.1
PKP268D28B		99	

- Applicable Connector (Molex)
- Connector Housing: 51067-0600 (Molex)
- Contact: 50217-9101 (Molex)
- Crimp Tool: 57189-5000 (Molex)
- 57190-5000 (Molex)

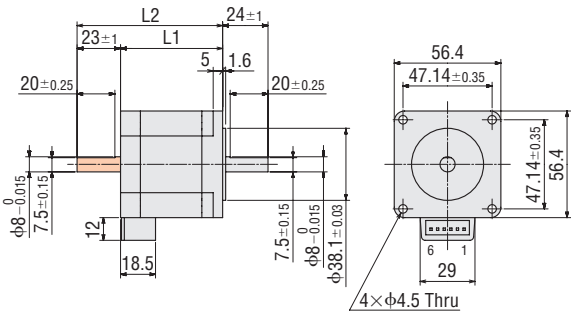

- These dimensions are for double shaft motors.
- For single shaft motors, ignore the shaded areas.

## Inner Wiring Diagram of Motor


Wiring Diagram No.: Model B③

- Refer to the motor inner wiring page for an inner wiring diagram of the motor.

### ● Connection Cable (Sold separately)

#### ◇ Motor Connection Cable

Product Name	Length L [m]
LC2B06C	0.6
LC2B10C	1

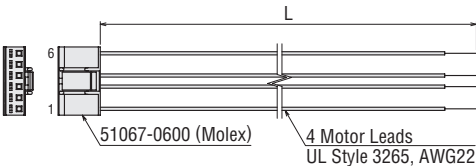

# Standard Type Frame Size 56.4 mm (Unipolar 5 lead wires)

## Mini-Connector Type

### Specifications

Product Name	Maximum Holding Torque Nm	Rotor Inertia J: kgm <sup>2</sup>	Rated Current A/Phase	Voltage VDC	Winding Resistance Ω/Phase	Inductance mH/Phase	Basic Step Angle	Recommended Driver Product Name*
PKP264U10□2	0.58	140×10 <sup>-7</sup>	1	4.4	4.4	6	1.8°	CMD2120P
PKP264U20□2			2	2.2	1.1	1.5		
PKP266U10□2	1.1	270×10 <sup>-7</sup>	1	6.9	6.9	11.6		
PKP266U20□2			2	3.4	1.7	2.9		
PKP268U10□2	2	500×10 <sup>-7</sup>	1	9.9	9.9	18.4		
PKP268U20□2			2	4.8	2.4	4.6		

● The box □ in the product name indicates the shaft **A** (single shaft) or **B** (double shaft).


\*See "Drivers for 2-Phase / 5-Phase Motors" page for details on the recommended drivers.

#### Note


● Be sure to set the driver current at or below the motor rated current. If the motor rated current is exceeded, the product will be damaged.

### Speed – Torque Characteristics (Reference values) fs: Max. Starting Frequency


PKP264U10A2/PKP264U10B2

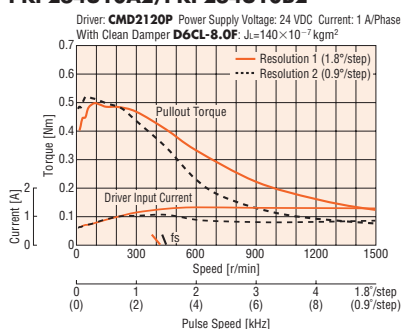


PKP266U10A2/PKP266U10B2

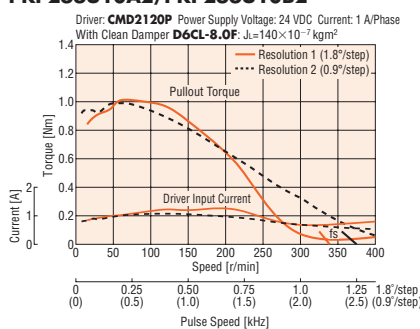


PKP268U10A2/PKP268U10B2

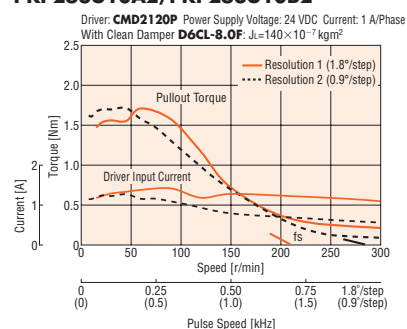


PKP264U20A2/PKP264U20B2

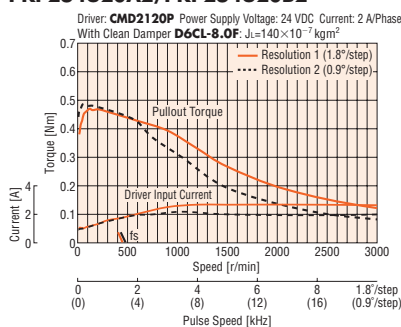

PKP266U20A2/PKP266U20B2

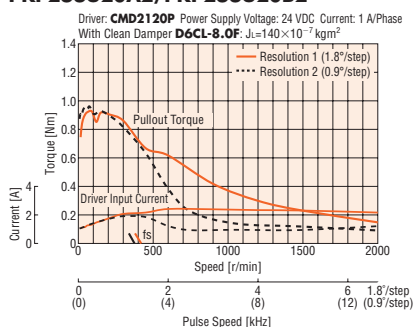

PKP268U20A2/PKP268U20B2

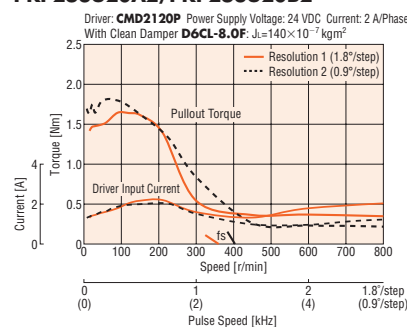

#### Note

- Data for the speed – torque characteristics is based on Oriental Motor's internal measurement conditions. If the conditions are changed, the characteristics may also change as a result.
- If there is a "clean damper" entry in the speed – torque characteristics, the data is for a double shaft motor when a clean damper is equipped.
- Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C max.

### Dimensions (Unit: mm)

#### Motor

Product Name	L1	L2	Mass [kg]
PKP264U10A2	39	—	0.45
PKP264U10B2		62	
PKP264U20A2		—	
PKP264U20B2	54	62	0.7
PKP266U10A2		—	
PKP266U10B2		77	
PKP266U20A2	76	—	1.1
PKP266U20B2		77	
PKP268U10A2		—	
PKP268U10B2	76	99	1.1
PKP268U20A2		—	
PKP268U20B2		99	

● Applicable Connector

Connector Housing: MDF97A-5S-3.5C (HIROSE ELECTRIC CO., LTD.)


Contact: MDF97-22SC (HIROSE ELECTRIC CO., LTD.)

Crimp Tool: HT801/MDF97-22S (HIROSE ELECTRIC CO., LTD.)

### Inner Wiring Diagram of Motor

Wiring Diagram No.: Model A②

● See "Inner Wiring Diagram of Motor" page for the inner wiring diagram of the motor.

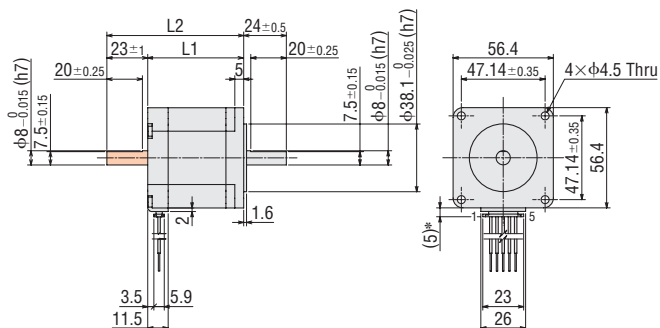

\*With connection cable


● These dimensions are for double shaft motors.

For single shaft motors, ignore the shaded areas.

#### Connection Cable (Sold separately)

##### Motor Connection Cable

Product Name	Length L [m]
LC2U06E	0.6
LC2U10E	1

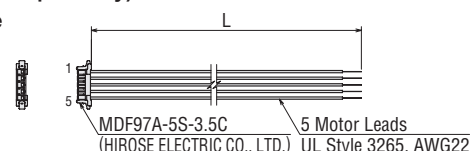

2-Phase  
Motors  
PKP

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

Flat  
Type

SH Geared  
Type

CS Geared  
Type

Common  
Specifications

Inner  
Wiring  
of Motor

5-Phase  
Motors  
PKP

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

TS Geared  
Type

Common  
Specifications

Motor  
Pin  
Arrangement

Drivers for  
2-Phase/5-Phase  
Motors

Cables

Peripheral  
Equipment

Motor  
Frame Size

13 mm

20 mm

28 mm

35 mm

42 mm

56.4 mm

60 mm

61 mm

85 mm

90 mm

# Standard Type

Frame Size 56.4 mm (Unipolar 6 lead wires)

## Connector Type


## Specifications

Product Name	Maximum Holding Torque Nm	Rotor Inertia J: kgm <sup>2</sup>	Rated Current A/Phase	Voltage VDC	Winding Resistance Ω/Phase	Inductance mH/Phase	Basic Step Angle	Recommended Driver Product Name*
PKP264U10□	0.51	120×10 <sup>-7</sup>	1	5.87	5.87	7.2	1.8°	CMD21 20P
PKP264U20□			2	2.9	1.45	1.8		—
PKP264U30□			3	1.95	0.65	0.8		—
PKP266U10□	1.1	290×10 <sup>-7</sup>	1	8.1	8.1	11.6		CMD21 20P
PKP266U20□			2	4	2	2.9		—
PKP266U30□			3	2.76	0.92	1.33		—
PKP268U10□	1.75	490×10 <sup>-7</sup>	1	9.32	9.32	17.6		CMD21 20P
PKP268U20□			2	4.9	2.45	4.4		—
PKP268U30□			3	3.15	1.05	1.96		—


- The box □ in the product name indicates the shaft **A** (single shaft) or **B** (double shaft).
- \*See "Drivers for 2-Phase / 5-Phase Motors" page for details on the recommended drivers.
- Note**
- Be sure to set the driver current at or below the motor rated current. If the motor rated current is exceeded, the product will be damaged.

## Speed – Torque Characteristics (Reference values) fs: Max. Starting Frequency


PKP264U10A/PKP264U10B

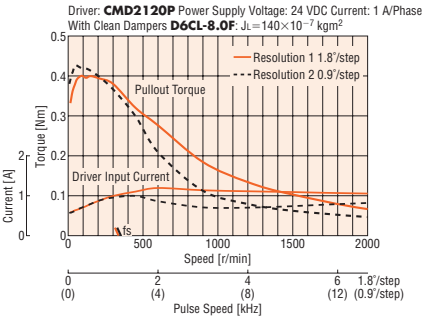


PKP264U20A/PKP264U20B

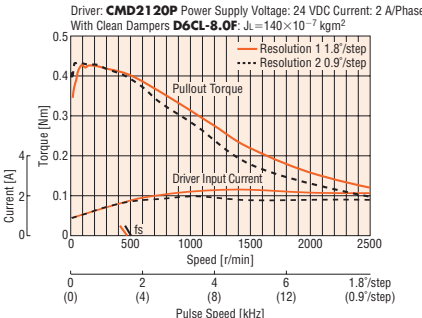


PKP264U30A/PKP264U30B

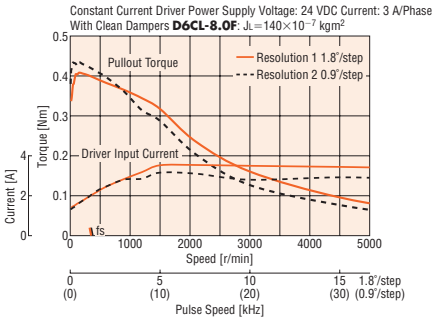


PKP266U10A/PKP266U10B

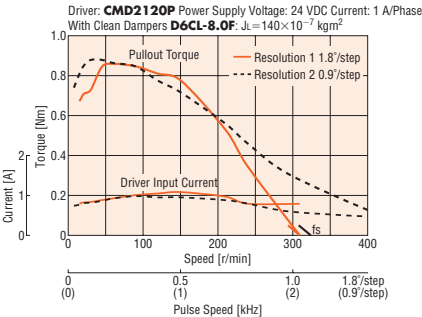


PKP266U20A/PKP266U20B

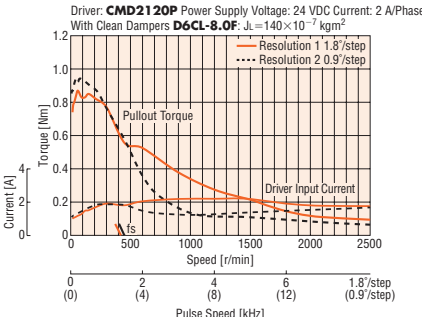


PKP266U30A/PKP266U30B

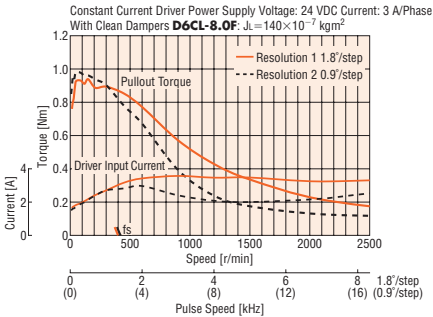


PKP268U10A/PKP268U10B

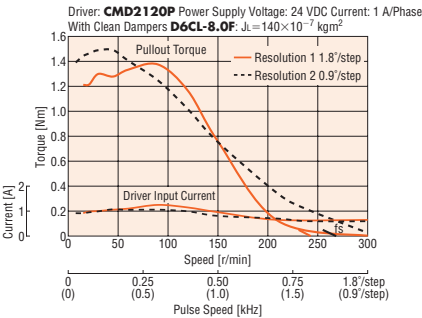

PKP268U20A/PKP268U20B

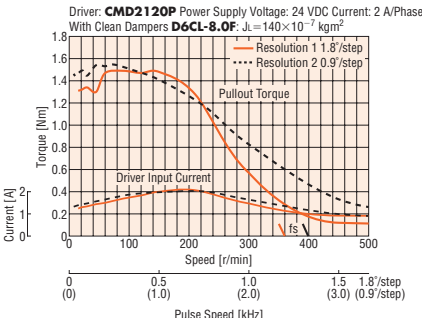

PKP268U30A/PKP268U30B

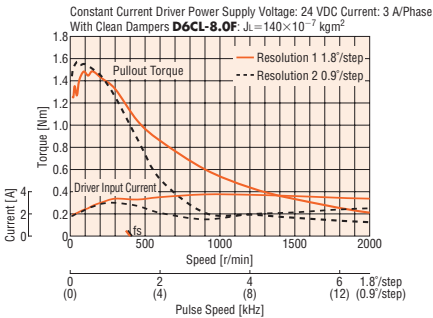


- Note**
- Data for the speed – torque characteristics is based on Oriental Motor's internal measurement conditions. If the conditions are changed, the characteristics may also change as a result.
- If there is a "clean damper" entry in the speed – torque characteristics, the data is for a double shaft motor when a clean damper is equipped.
- Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C or less.

**Motor**

● Applicable Connector (Molex)  
Connector Housing: 51067-0600 (Molex)  
Contact: 50217-9101 (Molex)  
Crimp Tool: 57189-5000 (Molex)  
57190-5000 (Molex)

◇ Motor Connection Cable

Diagram of a 6-pin motor cable assembly. The cable has a length  $L$  and is terminated with a 51067-0600 (Molex) connector. The connector has pins 1 and 6 labeled. The cable is labeled "6 Motor Leads UL Style 3265, AWG22".



Wiring Diagram No.: Model B④

● Refer to the motor inner wiring page for an inner wiring diagram of the motor.



Motor  
Frame Size

13 mm

20 mm

28 mm

35 mm

42 mm

56.4 mm

56.4 mm

85 mm

90 mm

# Standard Type with Encoder

Frame Size 56.4 mm (Bipolar 4 lead wires)

## Mini-Connector Type

### Specifications


Product Name	Maximum Holding Torque Nm	Rotor Inertia J: kgm <sup>2</sup>	Rated Current A/Phase	Voltage VDC	Winding Resistance Ω/Phase	Inductance mH/Phase	Basic Step Angle	Recommended Driver Product Name*
<b>PKP264D14A2-R3</b> <span style="background-color: #cccccc; border: 1px solid black; padding: 0 2px;"> </span>	0.74	140×10 <sup>-7</sup>	1.4	2.9	2.1	6	1.8°	<b>CVD228BR-K</b>
<b>PKP264D28A2-R3</b> <span style="background-color: #cccccc; border: 1px solid black; padding: 0 2px;"> </span>			2.8	1.6	0.57	1.5		<b>CVD242BR-K</b>
<b>PKP264D42A2-R3</b> <span style="background-color: #cccccc; border: 1px solid black; padding: 0 2px;"> </span>			4.2	1	0.24	0.65		<b>CVD228BR-K</b>
<b>PKP266D14A2-R3</b> <span style="background-color: #cccccc; border: 1px solid black; padding: 0 2px;"> </span>	1.4	270×10 <sup>-7</sup>	1.4	4.6	3.3	12		<b>CVD242BR-K</b>
<b>PKP266D28A2-R3</b> <span style="background-color: #cccccc; border: 1px solid black; padding: 0 2px;"> </span>			2.8	2.4	0.86	2.9		<b>CVD228BR-K</b>
<b>PKP266D42A2-R3</b> <span style="background-color: #cccccc; border: 1px solid black; padding: 0 2px;"> </span>			4.2	1.6	0.38	1.3		<b>CVD242BR-K</b>
<b>PKP268D14A2-R3</b> <span style="background-color: #cccccc; border: 1px solid black; padding: 0 2px;"> </span>	2.5	500×10 <sup>-7</sup>	1.4	6.6	4.7	18		<b>CVD228BR-K</b>
<b>PKP268D28A2-R3</b> <span style="background-color: #cccccc; border: 1px solid black; padding: 0 2px;"> </span>			2.8	3.4	1.2	4.6		<b>CVD228BR-K</b>
<b>PKP268D42A2-R3</b> <span style="background-color: #cccccc; border: 1px solid black; padding: 0 2px;"> </span>			4.2	2.2	0.53	2		<b>CVD242BR-K</b>

- A letter “E” (200 P/R) or “F” (400 P/R) indicating the encoder resolution is specified where the box   is located in the product name.  
A letter “E” (200 P/R), F (400 P/R) or “J” (1000 P/R) indicating the encoder resolution is specified where the box   is located in the product name.  
A letter “L” (line driver output) indicating the encoder output circuit configuration is specified where the box   is located in the product name. For voltage output, there is no letter in the   box.
- Refer to the common specifications page for encoder specifications.
- \*See "Drivers for 2-Phase / 5-Phase Motors" page for drivers that can be used in combination.

#### Note

- Be sure to set the driver current at or below the motor rated current. If the motor rated current is exceeded, the product will be damaged.

### Speed - Torque Characteristics (Reference values) fs: Max. Starting Frequency

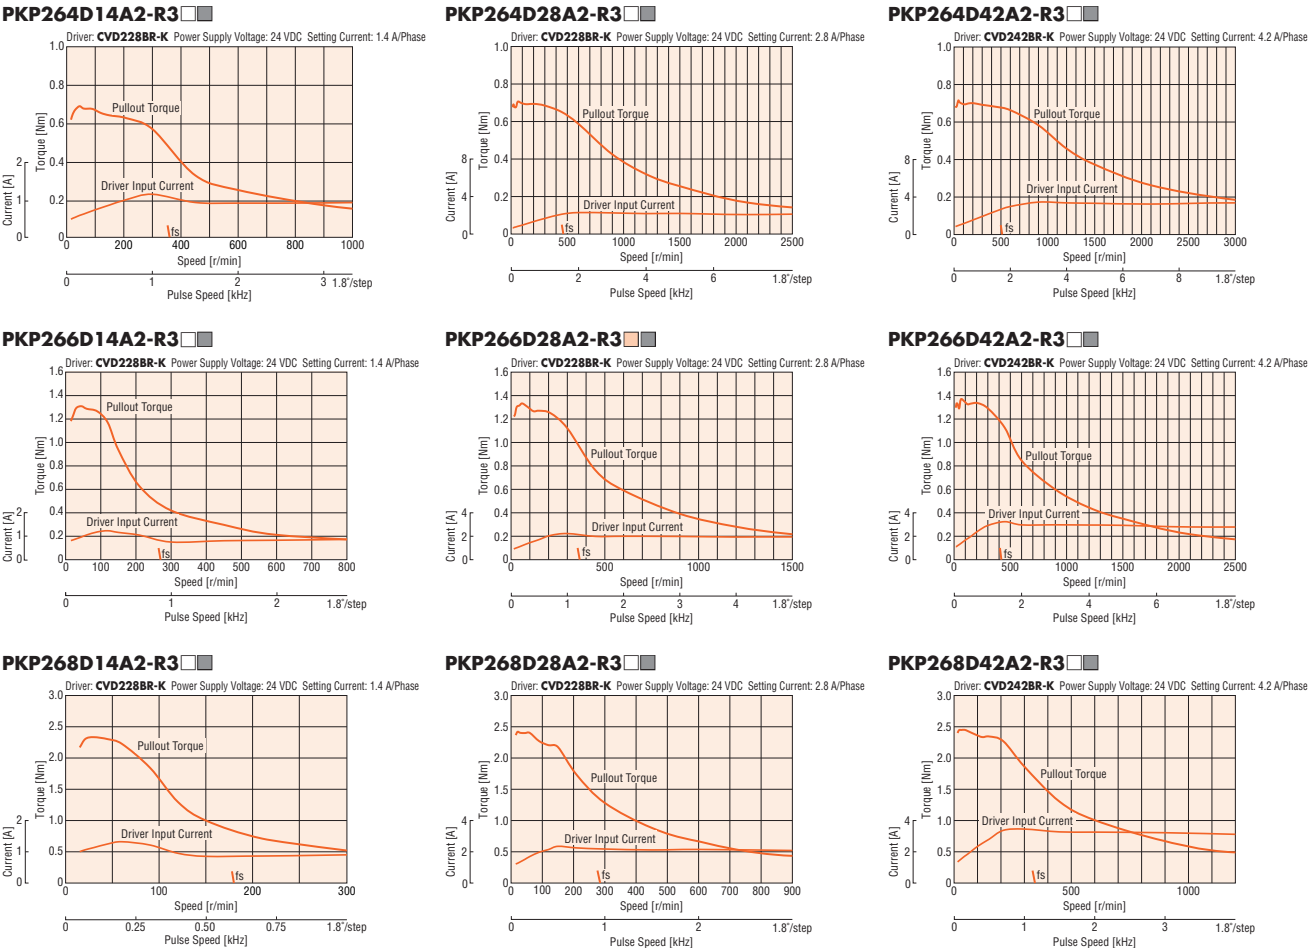

#### Note

- Data for the speed – torque characteristics is based on Oriental Motor’s internal measurement conditions. If the conditions are changed, the characteristics may also change as a result.
- Depending on the driving conditions, a considerable amount of heat may be generated by the motor. To protect the encoder, be sure to keep the motor case temperature at 85°C max.
- The characteristics are the same if combined with an RS-485 communication type driver.

- A letter “E” (200 P/R) or “F” (400 P/R) indicating the encoder resolution is specified where the box   is located in the product name.  
A letter “E” (200 P/R), F (400 P/R) or “J” (1000 P/R) indicating the encoder resolution is specified where the box   is located in the product name.  
A letter “L” (line driver output) indicating the encoder output circuit configuration is specified where the box   is located in the product name. For voltage output, there is no letter in the   box.


## Dimensions (Unit = mm)

### ● Motor

Product Name	L	Mass kg
PKP264D14A2-R3	55.5	0.47
PKP264D28A2-R3		
PKP264D42A2-R3		
PKP266D14A2-R3	70.5	0.72
PKP266D28A2-R3		
PKP266D42A2-R3		
PKP268D14A2-R3	92.5	1.12
PKP268D28A2-R3		
PKP268D42A2-R3		

#### ● Applicable Connector (Molex)

	Motor (HIROSE ELECTRIC CO., LTD.)	Encoder (Molex)
Connector Housing	MDF97A-5S-3.5C	51021-0800
Contact	MDF97-22SC	50079-8100
Crimp Tool	HT801/MDF97-22S	57177-5000

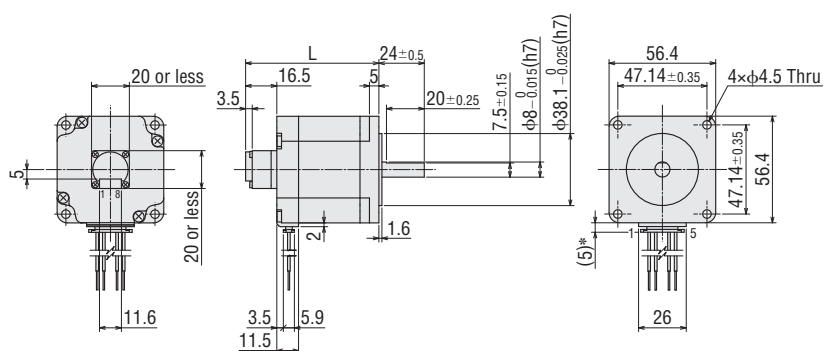


\*With connection cable

### ● Connection Cable (Sold separately)

#### ◇ Motor Connection Cable

Product Name	Length L [m]
LC2B06E	0.6
LC2B10E	1

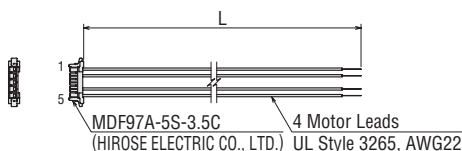

#### ◇ Encoder Connection Cable

##### ● For Voltage Output

Product Name	Length L [m]
LCE05A-006	0.6

##### ● For Line Driver Output

Product Name	Length L [m]
LCE08A-006	0.6

● Refer to the cables page for dimensions.

## Inner Wiring Diagram of Motor

Wiring Diagram No.: Model A①

● Refer to the motor inner wiring page for an inner wiring diagram of the motor.

● A letter "E" (200 P/R) or "F" (400 P/R) indicating the encoder resolution is specified where the box is located in the product name.  
A letter "E" (200 P/R), "F" (400 P/R) or "J" (1000 P/R) indicating the encoder resolution is specified where the box is located in the product name.  
A letter "L" (line driver output) indicating the encoder output circuit configuration is specified where the box is located in the product name. For voltage output, there is no letter in the box.

2-Phase  
Motors  
PKP

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

Flat  
Type

SH Geared  
Type

CS Geared  
Type

Common  
Specifications

Inner  
Wiring  
of Motor

5-Phase  
Motors  
PKP

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

TS Geared  
Type

Common  
Specifications

Motor  
Pin  
Arrangement

Drivers for  
2-Phase/5-Phase  
Motors

Cables

Peripheral  
Equipment

- Motor  
Frame Size
- 13 mm
  - 20 mm
  - 28 mm
  - 35 mm
  - 42 mm
  - 56.4 mm
  - 56.4 mm
  - 85 mm
  - 90 mm

# Standard Type with Electromagnetic Brake

## Frame Size 56.4 mm (Bipolar 4 lead wires)


### Mini-Connector Type

### Specifications

Product Name	Maximum Holding Torque Nm	Rotor Inertia J: kgm <sup>2</sup>	Rated Current A/Phase	Voltage VDC	Winding Resistance Ω/Phase	Inductance mH/Phase	Basic Step Angle	Electromagnetic Brake Static Friction Torque Nm
PKP264D28M2	0.74	270×10 <sup>-7</sup> *	2.8	1.6	0.57	1.5	1.8°	0.8
PKP266D28M2	1.4	400×10 <sup>-7</sup> *		2.4	0.86	2.9		
PKP268D28M2	2.5	630×10 <sup>-7</sup> *		3.4	1.2	4.6		

- Refer to the common specification page for electromagnetic brake specifications.
  - \*This value is including the electromagnetic brake inertia.
- Note**
- Be sure to set the driver current at or below the motor rated current. If the motor rated current is exceeded, the product will be damaged.

### Speed – Torque Characteristics (Reference values) fs: Max. Starting Frequency

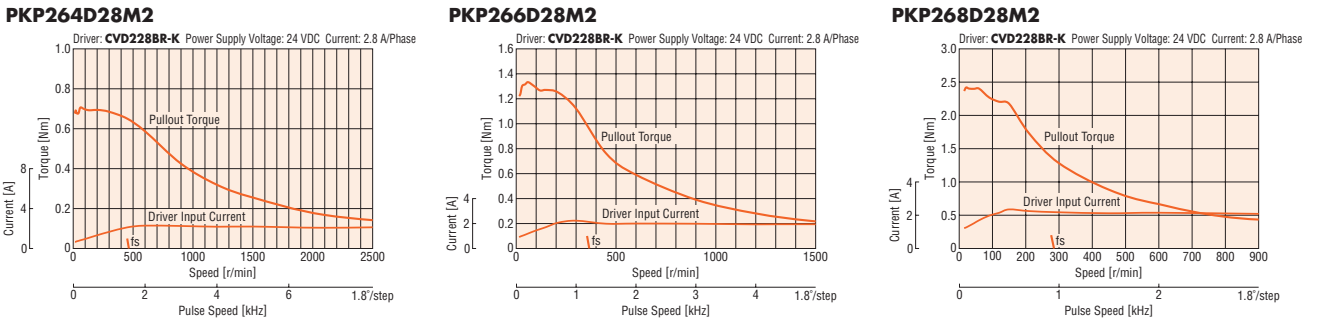

- Note**
- Data for the speed – torque characteristics is based on Oriental Motor's internal measurement conditions. If the conditions are changed, the characteristics may also change as a result.
  - Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C max.
  - The characteristics are the same when RS-485 communication type driver is used in combination.


### Dimensions (Unit: mm)

#### Motor

Product Name	L1	L2	Mass [kg]
PKP264D28M2	73.5	55.3	0.65
PKP266D28M2	88.5	70.3	0.9
PKP268D28M2	110.5	92.3	1.3

Applicable Connector

	Motor (HIROSE ELECTRIC CO., LTD.)	Electromagnetic Brake (HIROSE ELECTRIC CO., LTD.)
Connector Housing	MDF97A-5S-3.5C	DF62C-2S-2.2C
Contact	MDF97-22SC	DF62-22SCA
Crimping Tool	HT801/MDF97-22S	HT801/DF62-22(10)

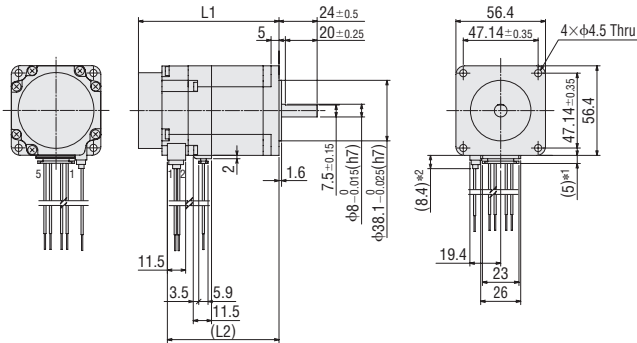


- \*1 With connection cable
- \*2 With electromagnetic brake connection cable

#### Connection Cable (Sold separately)


##### Motor Connection Cable

Product Name	Length L [m]
LC2B06E	0.6
LC2B10E	1

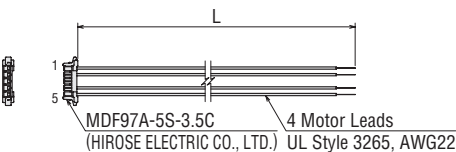

##### Electromagnetic Brake Connection Cable

Product Name	Length L [m]
LCM02A-006	0.6
LCM02A-010	1

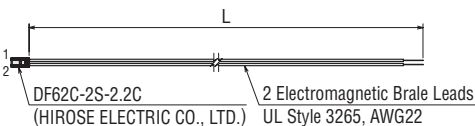

### Inner Wiring Diagram of Motor

Wiring Diagram No.: Model A①

- See "Inner Wiring Diagram of Motor" page for the inner wiring diagram of the motor.

# Standard Type with Electromagnetic Brake

Frame Size 56.4 mm (Unipolar 6 lead wires)

## Connector Type

### Specifications

Product Name	Maximum Holding Torque Nm	Rotor Inertia J: kgm <sup>2</sup>	Rated Current A/Phase	Voltage VDC	Winding Resistance Ω/Phase	Inductance mH/Phase	Basic Step Angle	Electromagnetic Brake Static Friction Torque Nm
PKP264U20M	0.51	270×10 <sup>-7</sup> *	2	2.9	1.45	1.8	1.8°	1.5
PKP266U20M	1.1	440×10 <sup>-7</sup> *		4	2	2.9		
PKP268U20M	1.75	640×10 <sup>-7</sup> *		4.9	2.45	4.4		

● Refer to the common specification page for electromagnetic brake specifications.


\*This value is including the electromagnetic brake inertia.

#### Note


● Be sure to set the driver current at or below the motor rated current. If the motor rated current is exceeded, the product will be damaged.

### Speed – Torque Characteristics (Reference values) $f_s$ : Max. Starting Frequency


#### PKP264U20M

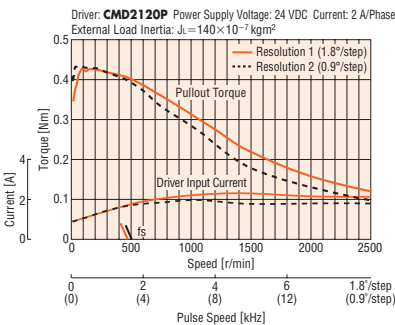

#### PKP266U20M

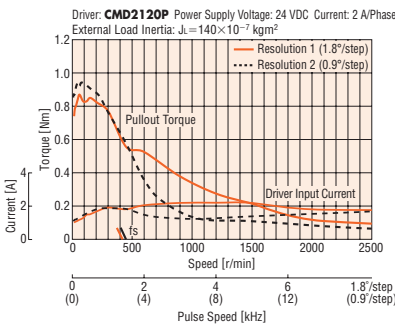

#### PKP268U20M

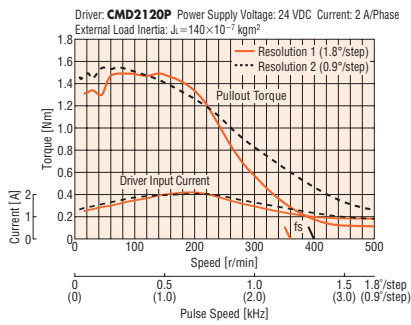

#### Note

● Data for the speed – torque characteristics is based on Oriental Motor's internal measurement conditions. If the conditions are changed, the characteristics may also change as a result.

● The data in the speed – torque characteristics represents the use of an external load inertia.

● Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C max.

### Dimensions (Unit: mm)

#### Motor

Product Name	L	Mass [kg]
PKP264U20M	75.5	0.76
PKP266U20M	90.5	1.03
PKP268U20M	112.5	1.4


● Applicable Connector (Molex)

Connector Housing: 51067-0600

Contact: 50217-9101

Crimp Tool: 57189-5000


57190-5000

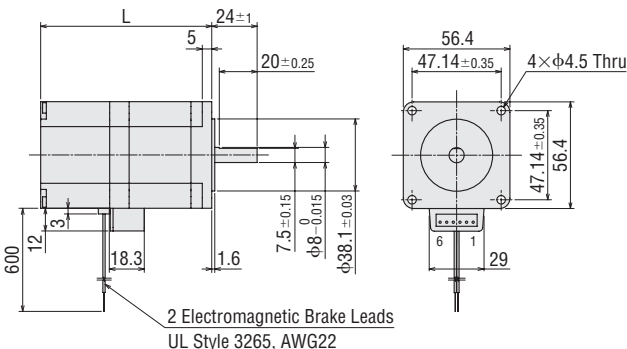

#### Connection Cable (Sold separately)

##### Motor Connection Cable

Product Name	Length L [m]
LC2U06C	0.6
LC2U10C	1

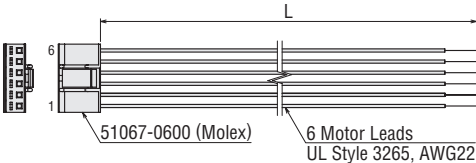

### Inner Wiring Diagram of Motor

Wiring Diagram No.: Model B④

● See "Inner Wiring Diagram of Motor" page for the inner wiring diagram of the motor.

2-Phase  
Motors  
PKP

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

Flat  
Type

SH Geared  
Type

CS Geared  
Type

Common  
Specifications

Inner  
Wiring  
of Motor

5-Phase  
Motors  
PKP

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

TS Geared  
Type

Common  
Specifications

Motor  
Pin  
Arrangement

Drivers for  
2-Phase/5-Phase  
Motors

Cables

Peripheral  
Equipment

- Motor  
Frame Size
- 13 mm
- 20 mm
- 28 mm
- 35 mm
- 42 mm
- 56.4 mm
- 60 mm
- 61 mm
- 85 mm
- 90 mm

# Standard Type

## Frame Size 60 mm (Bipolar 4 lead wires)

### Lead Wire Type


### Specifications

Product Name	Maximum Holding Torque Nm	Rotor Inertia J: kgm <sup>2</sup>	Rated Current A/Phase	Voltage VDC	Winding Resistance Ω/Phase	Inductance mH/Phase	Basic Step Angle
<b>PK264JD</b> <input type="checkbox"/>	1.06	$280 \times 10^{-7}$	2.8	2.1	0.73	1.8	1.8°
<b>PK266JD</b> <input type="checkbox"/>	1.75	$450 \times 10^{-7}$		2.8	1	3.05	
<b>PK267JD</b> <input type="checkbox"/>	2.2	$570 \times 10^{-7}$		3.4	1.2	3.54	
<b>PK269JD</b> <input type="checkbox"/>	3.1	$900 \times 10^{-7}$		4.2	1.49	5.7	


- The box ☐ in the product name indicates the shaft **A** (single shaft) or **B** (double shaft).
- Note
- Be sure to set the driver current at or below the motor rated current. If the motor rated current is exceeded, the product will be damaged.

### Speed – Torque Characteristics (Reference values) fs: Max. Starting Frequency


#### PK264JDA/PK264JDB

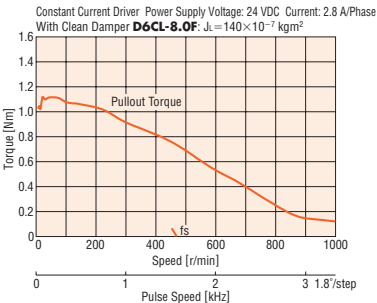


#### PK266JDA/PK266JDB

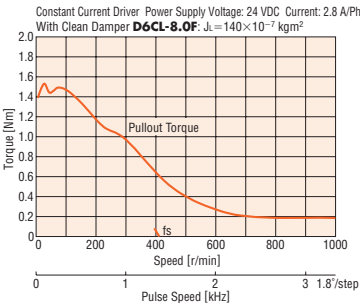

#### PK267JDA/PK267JDB

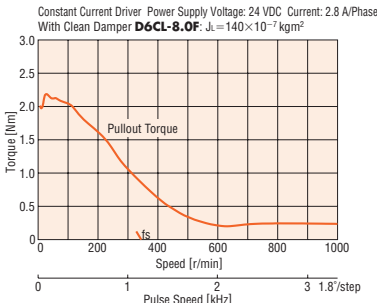

#### PK269JDA/PK269JDB

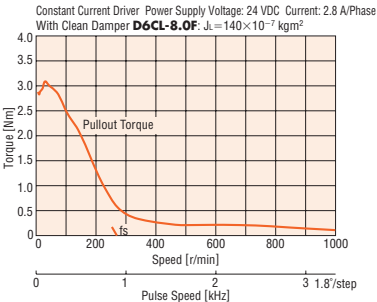


- Note
- Data for the speed – torque characteristics is based on Oriental Motor's internal measurement conditions. If the conditions are changed, the characteristics may also change as a result.
  - If there is a "clean damper" entry in the speed – torque characteristics, the data is for a double shaft motor when a clean damper is equipped.
  - Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C max.

### Dimensions (Unit: mm)

#### Motor

Product Name	L1	L2	Mass [kg]
<b>PK264JDA</b>	43.5	—	0.6
<b>PK264JDB</b>		66.5	
<b>PK266JDA</b>	54	—	0.83
<b>PK266JDB</b>		77	
<b>PK267JDA</b>	65	—	1.02
<b>PK267JDB</b>		88	
<b>PK269JDA</b>	85	—	1.43
<b>PK269JDB</b>		108	

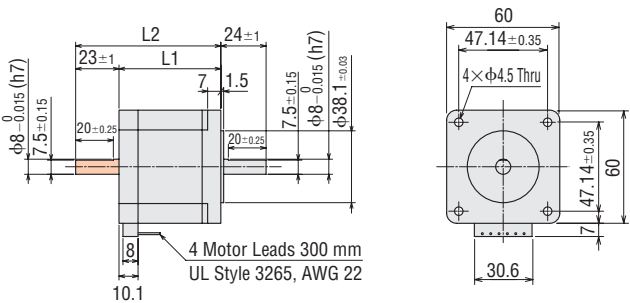

- These dimensions are for double shaft motors.  
For single shaft motors, ignore the shaded  areas.

### Inner Wiring Diagram of Motor

Wiring Diagram No.: Model C⑤

- See "Inner Wiring Diagram of Motor" page for the inner wiring diagram of the motor.

# Standard Type

## Frame Size 60 mm (Unipolar 6 lead wires)

### Lead Wire Type

### Specifications

Product Name	Maximum Holding Torque Nm	Rotor Inertia J: kgm <sup>2</sup>	Rated Current A/Phase	Voltage VDC	Winding Resistance Ω/Phase	Inductance mH/Phase	Basic Step Angle
<b>PK264J</b> □	0.75	$280 \times 10^{-7}$	2	2.9	1.46	1.8	1.8°
<b>PK266J</b> □	1.35	$450 \times 10^{-7}$		4	2	3.05	
<b>PK267J</b> □	1.7	$570 \times 10^{-7}$		4.8	2.4	3.54	
<b>PK269J</b> □	2.2	$900 \times 10^{-7}$		6	2.98	5.7	


● The box □ in the product name indicates the shaft **A** (single shaft) or **B** (double shaft).

#### Note


● Be sure to set the driver current at or below the motor rated current. If the motor rated current is exceeded, the product will be damaged.

### Speed – Torque Characteristics (Reference values) fs: Max. Starting Frequency


#### PK264JA/PK264JB

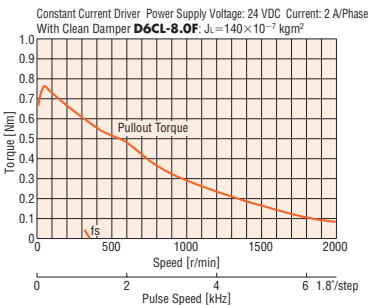


#### PK266JA/PK266JB

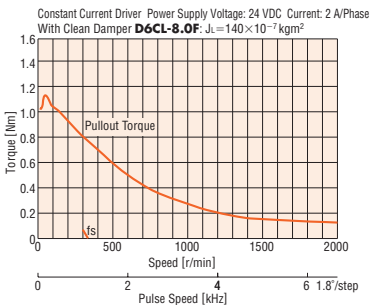

#### PK267JA/PK267JB

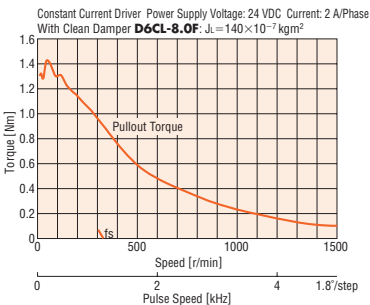

#### PK269JA/PK269JB

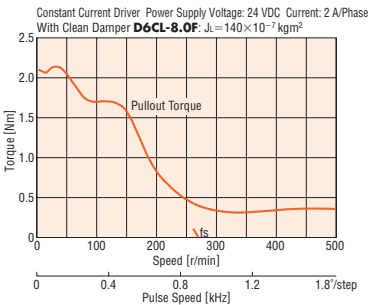


#### Note

- Data for the speed – torque characteristics is based on Oriental Motor's internal measurement conditions. If the conditions are changed, the characteristics may also change as a result.
- If there is a "clean damper" entry in the speed – torque characteristics, the data is for a double shaft motor when a clean damper is equipped.
- Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C max.

### Dimensions (Unit: mm)

#### Motor

Product Name	L1	L2	Mass [kg]
<b>PK264JA</b>	43.5	—	0.6
<b>PK264JB</b>		66.5	
<b>PK266JA</b>	54	—	0.83
<b>PK266JB</b>		77	
<b>PK267JA</b>	65	—	1.02
<b>PK267JB</b>		88	
<b>PK269JA</b>	85	—	1.43
<b>PK269JB</b>		108	

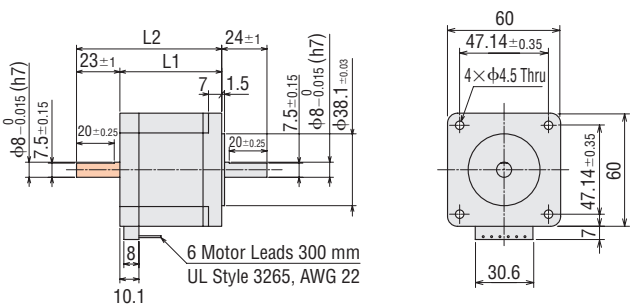

- These dimensions are for double shaft motors.  
For single shaft motors, ignore the shaded areas.

### Inner Wiring Diagram of Motor

Wiring Diagram No.: Model C⑦

- See "Inner Wiring Diagram of Motor" page for the inner wiring diagram of the motor.

2-Phase  
Motors  
PKP

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

Flat  
Type

SH Geared  
Type

CS Geared  
Type

Common  
Specifications

Inner  
Wiring  
of Motor

5-Phase  
Motors  
PKP

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

TS Geared  
Type

Common  
Specifications

Motor  
Pin  
Arrangement

Drivers for  
2-Phase/5-Phase  
Motors

Cables

Peripheral  
Equipment

- Motor  
Frame Size
- 13 mm
- 20 mm
- 28 mm
- 35 mm
- 42 mm
- 56.4 mm
- 60 mm
- 61 mm
- 85 mm
- 90 mm

# Standard Type

## Frame Size 85 mm (Bipolar 4 lead wires)

### Lead Wire Type


### Specifications

Product Name	Maximum Holding Torque Nm	Rotor Inertia J: kgm <sup>2</sup>	Rated Current A/Phase	Voltage VDC	Winding Resistance Ω/Phase	Inductance mH/Phase	Basic Step Angle	Recommended Driver Product Name*
PKP296D45□	3.3	1100×10 <sup>-7</sup>	4.5	1.9	0.42	3.1	1.8°	CVD245BR-K
PKP296D63□			6.3	1.4	0.23	1.6		—
PKP299D45□			4.5	2.7	0.6	5.4		CVD245BR-K
PKP299D63□	6.4	2200×10 <sup>-7</sup>	6.3	2	0.32	2.6		—
PKP2913D45□			4.5	3.5	0.78	6.9		CVD245BR-K
PKP2913D56□	9.5	3400×10 <sup>-7</sup>	5.6	2.6	0.47	4.4		—


- The box □ in the product name indicates the shaft **A** (single shaft) or **B** (double shaft).
  - \*See "Drivers for 2-Phase / 5-Phase Motors" page for drivers that can be used in combination.
- Note
- Be sure to set the driver current at or below the motor rated current. If the motor rated current is exceeded, the product will be damaged.

### Speed – Torque Characteristics (Reference values) fs: Max. Starting Frequency


PKP296D45A/PKP296D45B

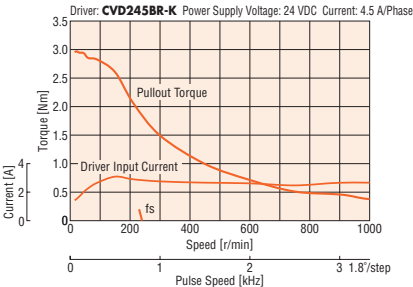


PKP299D45A/PKP299D45B

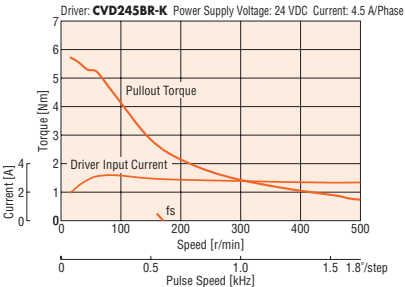


PKP2913D45A/PKP2913D45B

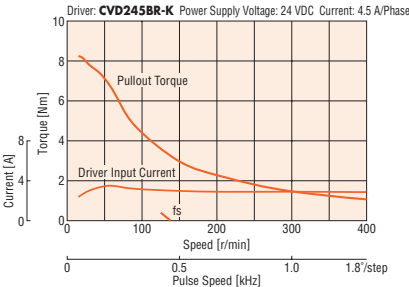


PKP296D63A/PKP296D63B

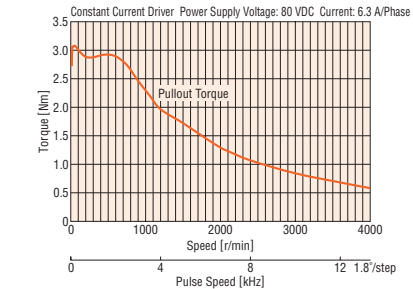

PKP299D63A/PKP299D63B

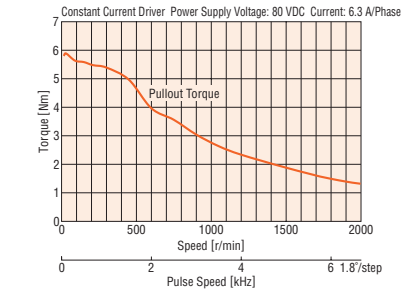

PKP2913D56A/PKP2913D56B

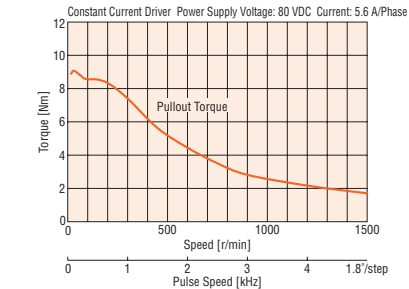


- Note
- Data for the speed – torque characteristics is based on Oriental Motor's internal measurement conditions. If the conditions are changed, the characteristics may also change as a result.
  - Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C max.

### Dimensions (Unit: mm)

#### ● Motor

Product Name	L1	L2	Mass [kg]
PKP296D45A	66	—	1.8
PKP296D45B		100	
PKP296D63A		—	
PKP296D63B	96	100	2.9
PKP299D45A		—	
PKP299D45B		130	
PKP299D63A	126	—	4
PKP299D63B		130	
PKP2913D45A		—	
PKP2913D45B	126	160	4
PKP2913D56A		—	
PKP2913D56B		160	

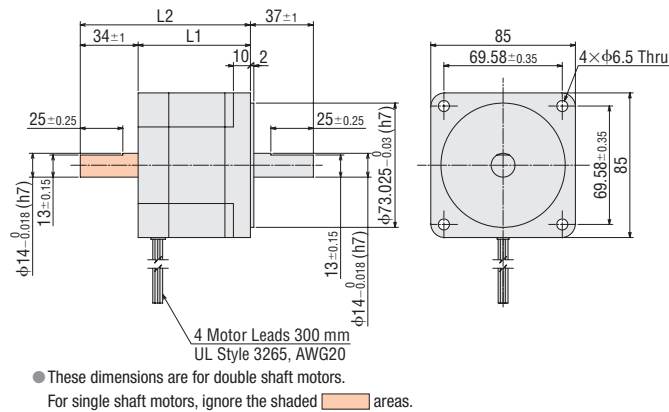

### Inner Wiring Diagram of Motor

Wiring Diagram No.: Model C⑤

- See "Inner Wiring Diagram of Motor" page for the inner wiring diagram of the motor.



2-Phase Motors <b>PKP</b>
Features Product Line
Product Number Product Line
Standard Type
High- Resolution Type
Flat Type
<b>SH</b> Geared Type
<b>CS</b> Geared Type
Common Specifications
Inner Wiring of Motor

5-Phase Motors <b>PKP</b>
Features Product Line
Product Number Product Line
Standard Type
High- Resolution Type
<b>TS</b> Geared Type
Common Specifications
Motor Pin Arrangement

Drivers for 2-Phase/5-Phase Motors
Cables
Peripheral Equipment

- Motor  
Frame Size
- 13 mm
- 20 mm
- 28 mm
- 35 mm
- 42 mm
- 56.4 mm
- 60 mm
- 61 mm
- 85 mm
- 90 mm

# Standard Type

## Frame Size 85 mm (Unipolar 6 lead wires)

### Lead Wire Type

### Specifications

Product Name	Maximum Holding Torque Nm	Rotor Inertia J: kgm <sup>2</sup>	Rated Current A/Phase	Voltage VDC	Winding Resistance Ω/Phase	Inductance mH/Phase	Basic Step Angle
PKP296U20□	2.6	1100×10 <sup>-7</sup>	2	4.4	2.2	7.8	1.8°
PKP296U30□			3	3	1.0	3.5	
PKP296U45□			4.5	2	0.45	1.6	
PKP299U20□	5.0	2200×10 <sup>-7</sup>	2	6.4	3.2	13.2	
PKP299U30□			3	4.5	1.5	6	
PKP299U45□			4.5	2.8	0.63	2.6	
PKP2913U20□	7.3	3400×10 <sup>-7</sup>	2	7.6	3.8	18	
PKP2913U40□			4	3.8	0.94	4.4	


● The box □ in the product name indicates the shaft **A** (single shaft) or **B** (double shaft).

#### Note


● Be sure to set the driver current at or below the motor rated current. If the motor rated current is exceeded, the product will be damaged.

### Speed – Torque Characteristics (Reference values) fs: Max. Starting Frequency


#### PKP296U20A/PKP296U20B

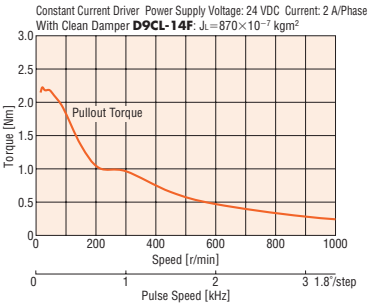


#### PKP299U20A/PKP299U20B

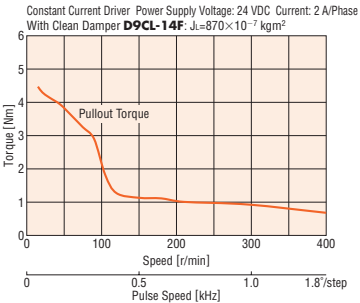


#### PKP2913U20A/PKP2913U20B

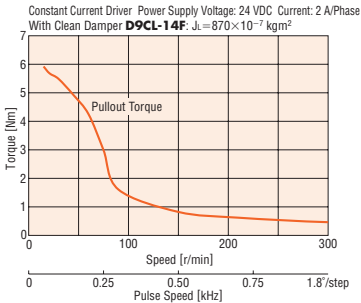


#### PKP296U30A/PKP296U30B

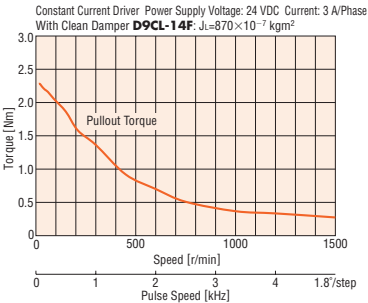


#### PKP299U30A/PKP299U30B

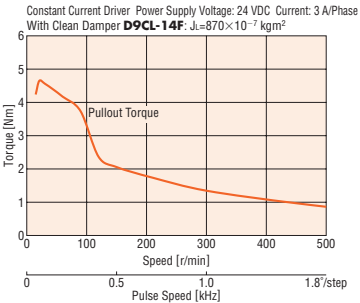


#### PKP2913U40A/PKP2913U40B

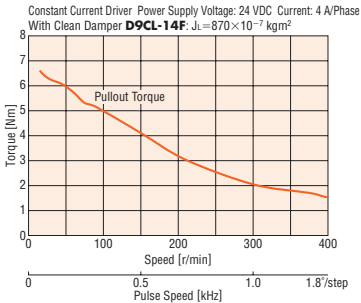

#### PKP296U45A/PKP296U45B

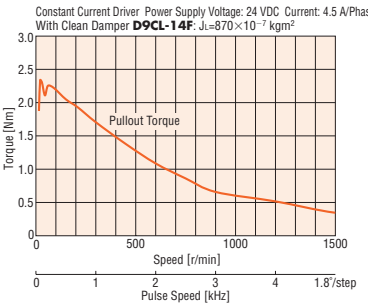

#### PKP299U45A/PKP299U45B

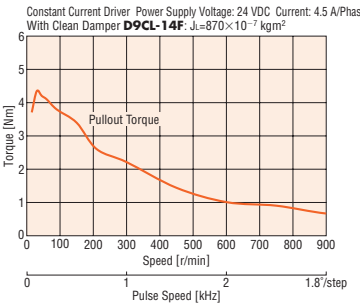


#### Note

- Data for the speed – torque characteristics is based on Oriental Motor's internal measurement conditions. If the conditions are changed, the characteristics may also change as a result.
- If there is a "clean damper" entry in the speed – torque characteristics, the data is for a double shaft motor when a clean damper is equipped.
- Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C max.

## ■ Dimensions (Unit: mm)

### ● Motor

Product Name	L1	L2	Mass [kg]
<b>PKP296U20A</b>	66	—	1.8
<b>PKP296U20B</b>		100	
<b>PKP296U30A</b>		—	
<b>PKP296U30B</b>		100	
<b>PKP296U45A</b>		—	
<b>PKP296U45B</b>		100	
<b>PKP299U20A</b>	96	—	2.9
<b>PKP299U20B</b>		130	
<b>PKP299U30A</b>		—	
<b>PKP299U30B</b>		130	
<b>PKP299U45A</b>		—	
<b>PKP299U45B</b>		130	
<b>PKP2913U20A</b>	126	—	4
<b>PKP2913U20B</b>		160	
<b>PKP2913U40A</b>		—	
<b>PKP2913U40B</b>		160	

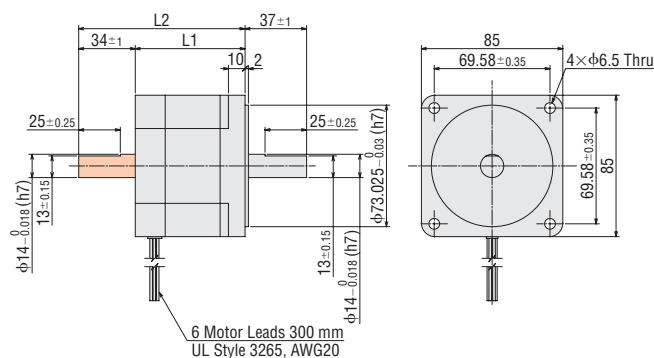

- These dimensions are for double shaft motors.  
For single shaft motors, ignore the shaded areas.

## ■ Inner Wiring Diagram of Motor

Wiring Diagram No.: Model C⑦

- See "Inner Wiring Diagram of Motor" page for the inner wiring diagram of the motor.

### 2-Phase Motors PKP

#### Features Product Line

#### Product Number Product Line

#### Standard Type

#### High- Resolution Type

#### Flat Type

#### SH Geared Type

#### CS Geared Type

#### Common Specifications

#### Inner Wiring of Motor

### 5-Phase Motors PKP

#### Features Product Line

#### Product Number Product Line

#### Standard Type

#### High- Resolution Type

#### TS Geared Type

#### Common Specifications

#### Motor Pin Arrangement

#### Drivers for 2-Phase/5-Phase Motors

#### Cables

#### Peripheral Equipment

- Motor  
Frame Size
- 13 mm
- 20 mm
- 28 mm
- 35 mm
- 42 mm
- 50 mm
- 51 mm
- 56.4 mm
- 60 mm
- 61 mm
- 85 mm
- 90 mm

# High-Resolution Type Frame Size 28 mm (Bipolar 4 lead wires)

## Connector Type

### Specifications

Product Name	Maximum Holding Torque Nm	Rotor Inertia J: kgm <sup>2</sup>	Rated Current A/Phase	Voltage VDC	Winding Resistance Ω/Phase	Inductance mH/Phase	Basic Step Angle	Recommended Driver Product Name*
<b>PKP223MD15</b> <span style="border: 1px solid black; padding: 0 2px;"> </span>	0.086	$8.6 \times 10^{-7}$	1.5	1.77	1.18	1.3	0.9°	<b>CVD215BR-K</b>
<b>PKP225MD15</b> <span style="border: 1px solid black; padding: 0 2px;"> </span>	0.165	$17 \times 10^{-7}$		3	2	2.7		


● The box   in the product name indicates the shaft **A** (single shaft) or **B** (double shaft).  
 \*See "Drivers for 2-Phase / 5-Phase Motors" page for drivers that can be used in combination.

#### Note


● Set the current of the driver so that it does not exceed the rated current of the motor. If the current of the driver exceeds the rated current of the motor, it may cause damage to the product.

### Speed – Torque Characteristics (Reference values) fs: Max. Starting Frequency

**PKP223MD15A/PKP223MD15B**

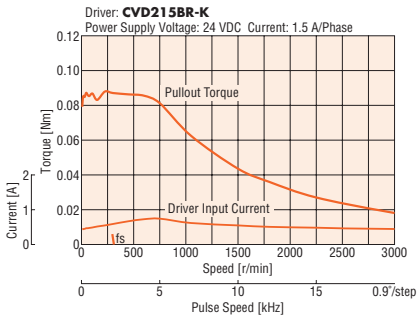

**PKP225MD15A/PKP225MD15B**

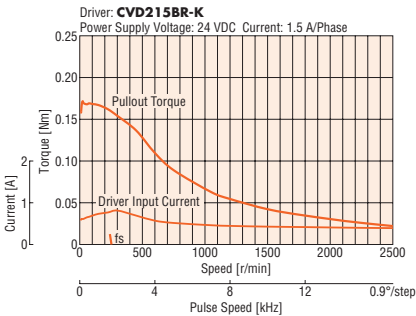

#### Note



- Data for the speed – torque characteristics is based on Oriental Motor's internal measurement conditions. If the conditions are changed, the characteristics may also change as a result.
- Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C or less.
- The characteristics are the same when RS-485 communication type driver is used in combination.

### Dimensions (Unit: mm)

#### ● Motors

Product Name	L1	L2	Mass [kg]
<b>PKP223MD15A</b>	32	—	0.11
<b>PKP223MD15B</b>		42	
<b>PKP225MD15A</b>	51.5	—	0.2
<b>PKP225MD15B</b>		61.5	

● Applicable Connectors  
 Connector Housing: 51065-0600 (Molex)  
 Contact: 50212-8100 (Molex)  
 Crimp Tool: 57176-5000 (Molex)

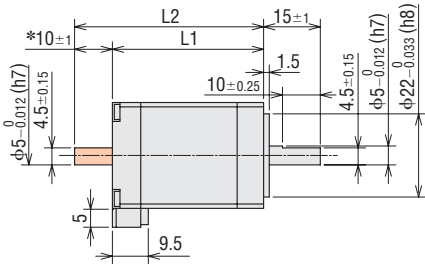


\*The length of the shaft flat on the double shaft model is 10±0.25.  
 ● These dimensions are for double shaft motors.  
 For single shaft motors, ignore the shaded  areas.

#### ● Connection Cables (Sold separately)

##### ◇ Motor Connection Cable

Product Name	Length L [m]
<b>LC2B06A</b>	0.6
<b>LC2B10A</b>	1

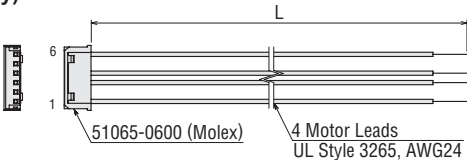

### Inner Wiring Diagram of Motor

Wiring Diagram No.: Model B③

● See "Inner Wiring Diagram of Motor" page for the inner wiring diagram of the motor.

# High-Resolution Type Frame Size 28 mm (Unipolar 6 lead wires)

## Connector Type

## Specifications

Product Name	Maximum Holding Torque Nm	Rotor Inertia J: kgm <sup>2</sup>	Rated Current A/Phase	Voltage VDC	Winding Resistance Ω/Phase	Inductance mH/Phase	Basic Step Angle	Recommended Driver Product Name*
<b>PKP223MU09</b> □	0.07	$8.6 \times 10^{-7}$	0.95	2.95	3.11	1.9	0.9°	<b>CMD2109P</b>
<b>PKP225MU09</b> □	0.124	$17 \times 10^{-7}$		4.4	4.6	3.2		

● The box □ in the product name indicates the shaft **A** (single shaft) or **B** (double shaft).


\*See "Drivers for 2-Phase / 5-Phase Motors" page for details on the recommended drivers.

### Note


● Set the current of the driver so that it does not exceed the rated current of the motor. If the current of the driver exceeds the rated current of the motor, it may cause damage to the product.

## Speed – Torque Characteristics (Reference values) $f_s$ : Max. Starting Frequency

### PKP223MU09A/PKP223MU09B

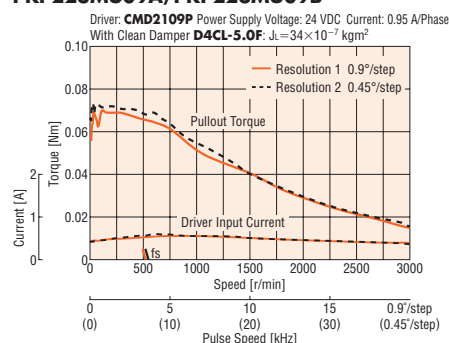

### PKP225MU09A/PKP225MU09B

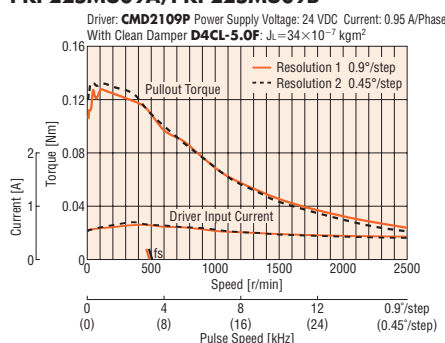

### Note

● Data for the speed – torque characteristics is based on Oriental Motor's internal measurement conditions. If the conditions are changed, the characteristics may also change as a result.

● If there is a "clean damper" entry in the speed – torque characteristics, the data is for a double shaft motor when a clean damper is equipped.

● Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C or less.

## Dimensions (Unit: mm)

### Motors



Product Name	L1	L2	Mass [kg]
<b>PKP223MU09A</b>	32	—	0.11
<b>PKP223MU09B</b>		42	
<b>PKP225MU09A</b>	51.5	—	0.2
<b>PKP225MU09B</b>		61.5	

### Applicable Connectors

Connector Housing: 51065-0600 (Molex)

Contact: 50212-8100 (Molex)

Crimp Tool: 57176-5000 (Molex)

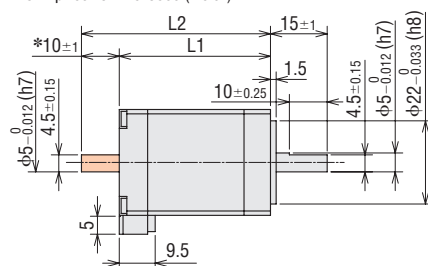

\*The length of the shaft flat on the double shaft model is 10±0.25.


● These dimensions are for double shaft motors.

For single shaft motors, ignore the shaded areas.

### Connection Cables (Sold separately)

#### Motor Connection Cable

Product Name	Length L [m]
<b>LC2U06A</b>	0.6
<b>LC2U10A</b>	1

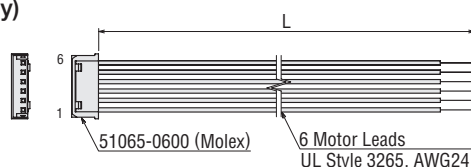

## Inner Wiring Diagram of Motor

Wiring Diagram No.: Model B④

● See "Inner Wiring Diagram of Motor" page for the inner wiring diagram of the motor.

2-Phase  
Motors  
PKP

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

Flat  
Type

SH Geared  
Type

CS Geared  
Type

Common  
Specifications

Inner  
Wiring  
of Motor

5-Phase  
Motors  
PKP

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

TS Geared  
Type

Common  
Specifications

Motor  
Pin  
Arrangement

Drivers for  
2-Phase/5-Phase  
Motors

Cables

Peripheral  
Equipment

- Motor Frame Size
- 13 mm
  - 20 mm
  - 28 mm
  - 35 mm
  - 42 mm
  - 50 mm
  - 51 mm
  - 56.4 mm
  - 60 mm
  - 61 mm
  - 85 mm
  - 90 mm

# High-Resolution Type with Encoder

## Frame Size 28 mm (Bipolar 4 lead wires)

### Connector Type

### Specifications

Product Name	Maximum Holding Torque Nm	Rotor Inertia J: kgm <sup>2</sup>	Rated Current A/Phase	Voltage VDC	Winding Resistance Ω/Phase	Inductance mH/Phase	Basic Step Angle	Recommended Driver Product Name*
<b>PKP223MD15A-R3F</b> ■	0.086	9.5×10 <sup>-7</sup>	1.5	1.77	1.18	1.3	0.9°	<b>CVD215BR-K</b>
<b>PKP225MD15A-R3F</b> ■	0.165	18×10 <sup>-7</sup>		3	2	2.7		


- A letter "L" (line driver output) indicating the encoder output circuit configuration is specified where the box ■ is located in the product name. For voltage output, there is no letter in the ■ box.
  - Refer to the common specifications page for encoder specifications.
- \*See "Drivers for 2-Phase / 5-Phase Motors" page for drivers that can be used in combination.

#### Note


- Be sure to set the driver current at or below the motor rated current. If the motor rated current is exceeded, the product will be damaged.

### Speed - Torque Characteristics (Reference values) fs: Max. Starting Frequency

PKP223MD15A-R3F■

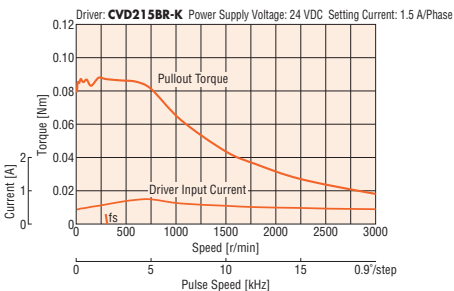

PKP225MD15A-R3F■

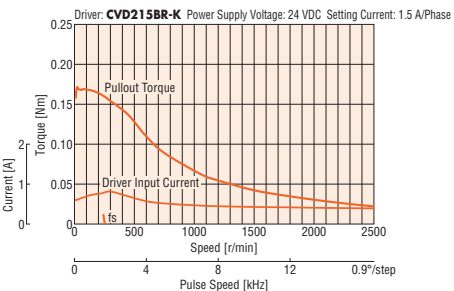


#### Note

- Data for the speed – torque characteristics is based on Oriental Motor's internal measurement conditions. If the conditions are changed, the characteristics may also change as a result.
- Depending on the driving conditions, a considerable amount of heat may be generated by the motor. To protect the encoder, be sure to keep the motor case temperature at 85°C max.
- The characteristics are the same if combined with an RS-485 communication type driver.

### Dimensions (Unit: mm)

#### Motor

Product Name	L	Mass [kg]
<b>PKP223MD15A-R3F</b> ■	47.5	0.13
<b>PKP225MD15A-R3F</b> ■	67	0.22

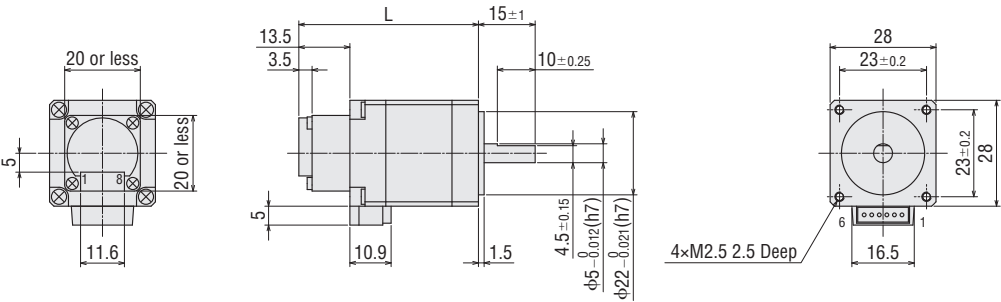


- Applicable Connector (Molex)

	Motor	Encoder
Connector Housing	51065-0600	51021-0800
Contact	50212-8100	50079-8100
Crimp Tool	57176-5000	57177-5000

#### Connection Cable (Sold separately)

##### Motor Connection Cable

Product Name	Length L [m]
<b>LC2B06A</b>	0.6
<b>LC2B10A</b>	1

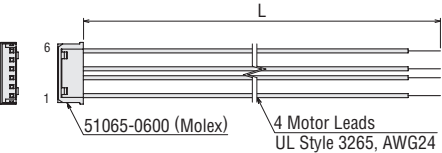

##### Encoder Connection Cable

##### For Voltage Output

Product Name	Length L [m]
<b>LCE05A-006</b>	0.6

##### For Line Driver Output

Product Name	Length L [m]
<b>LCE08A-006</b>	0.6

- Refer to the cables page for dimensions.

### Inner Wiring Diagram of Motor

Wiring Diagram No.: Model B③

- Refer to the motor inner wiring page for an inner wiring diagram of the motor.

- A letter "L" (line driver output) indicating the encoder output circuit configuration is specified where the box ■ is located in the product name. For voltage output, there is no letter in the ■ box.

## ■ Specifications



● The box ☐ in the product name indicates the shaft **A** (single shaft) or **B** (double shaft).

\*See "Drivers for 2-Phase / 5-Phase Motors" page for drivers that can be used in combination.

**Note**

● Be sure to set the driver current at or below the motor rated current. If the motor rated current is exceeded, the product will be damaged.

**PKP243MD15A2/PKP243MD15B2**

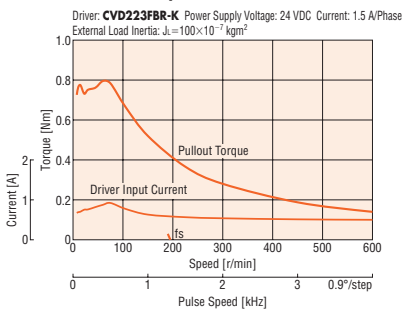

### Note

- Data for the speed – torque characteristics is based on Oriental Motor's internal measurement conditions. If the conditions are changed, the characteristics may also change as a result.
- The data in the speed – torque characteristics represents the use of an external load inertia.
- Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C or less.
- The characteristics are the same when RS-485 communication type driver is used in combination.


**Motors**

### ● Applicable Connectors

Connector Housing: MDF97A-5S-3.5C (HIROSE ELECTRIC CO., LTD.)

Contact: MDF97-22SC (HIROSE ELECTRIC CO., LTD.)

Crimp Tool: HT801/MDF97-22S (HIROSE ELECTRIC CO., LTD.)



\*2 With connection cable

- These dimensions are for double shaft motors.

For single shaft motors, ignore the shaded  areas.

◇ Motor Connection Cable

MDF97A-5S-3.5C  
(HIROSE ELECTRIC CO., LTD.)

4 Motor Leads  
UL Style 3265, AWG22

Wiring Diagram No.: Model A①

- See "Inner Wiring Diagram of Motor" page for the inner wiring diagram of the motor.



- Motor Frame Size
- 13 mm
- 20 mm
- 28 mm
- 35 mm
- 42 mm
- 50 mm
- 51 mm
- 56.4 mm
- 60 mm
- 61 mm
- 85 mm
- 90 mm

# High-Resolution Type

## Frame Size 42 mm (Bipolar 4 lead wires)

### Connector Type

### Specifications

Product Name	Maximum Holding Torque Nm	Rotor Inertia J: kgm <sup>2</sup>	Rated Current A/Phase	Voltage VDC	Winding Resistance Ω/Phase	Inductance mH/Phase	Basic Step Angle	Recommended Driver Product Name*
<b>PKP243MD15</b> <input type="checkbox"/>	0.30	36×10 <sup>-7</sup>	1.5	2.85	1.9	6.6	0.9°	<b>CVD215BR-K</b>
<b>PKP244MD15</b> <input type="checkbox"/>	0.42	57×10 <sup>-7</sup>		3.9	2.6	7.6		


● The box ☐ in the product name indicates the shaft **A** (single shaft) or **B** (double shaft).  
 \*See "Drivers for 2-Phase / 5-Phase Motors" page for drivers that can be used in combination.

#### Note


● Be sure to set the driver current at or below the motor rated current. If the motor rated current is exceeded, the product will be damaged.

### Speed – Torque Characteristics (Reference values) fs: Max. Starting Frequency

**PKP243MD15A/PKP243MD15B**

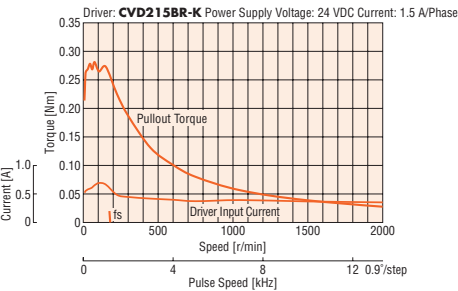

**PKP244MD15A/PKP244MD15B**

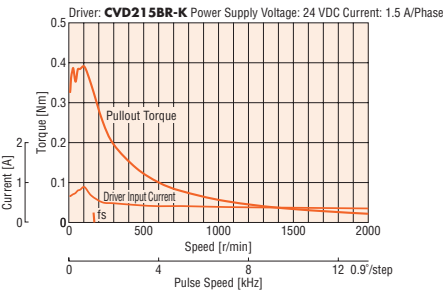

#### Note


- Data for the speed – torque characteristics is based on Oriental Motor's internal measurement conditions. If the conditions are changed, the characteristics may also change as a result.
- Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C or less.
- The characteristics are the same if combined with an RS-485 communication type driver.

### Dimensions (Unit: mm)

#### ● Motors

Product Name	L1	L2	Mass [kg]
<b>PKP243MD15A</b>	33	—	0.25
<b>PKP243MD15B</b>		48	
<b>PKP244MD15A</b>	39	—	0.3
<b>PKP244MD15B</b>		54	

- Applicable Connectors  
 Connector Housing: 51103-0600 (Molex)  
 Contact: 50351-8100 (Molex)  
 Crimp Tool: 57295-5000 (Molex)

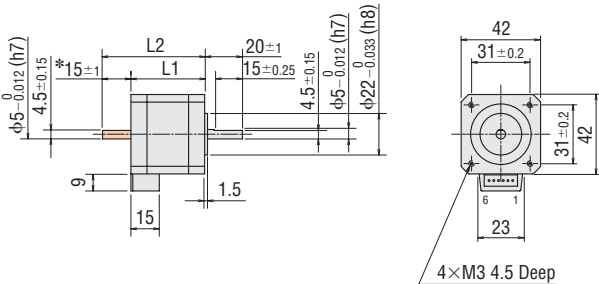


- \*The length of the shaft flat on the double shaft model is 15±0.25.
- These dimensions are for double shaft motors.  
 For single shaft motors, ignore the shaded areas.

#### ● Connection Cable (Sold separately)

##### ◇ Motor Connection Cable

Product Name	Length L [m]
<b>LC2B06B</b>	0.6
<b>LC2B10B</b>	1

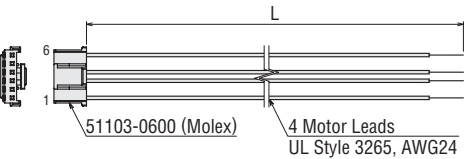

### Inner Wiring Diagram of Motor

Wiring Diagram No.: Model B③

- Refer to the motor inner wiring page for an inner wiring diagram of the motor.

## ■ Specifications

● The box ☐ in the product name indicates the shaft **A** (single shaft) or **B** (double shaft).

\*See "Drivers for 2-Phase / 5-Phase Motors" page for details on the recommended drivers.

● Be sure to set the driver current at or below the motor rated current. If the motor rated current is exceeded, the product will be damaged.

**PKP243MU12A2/PKP243MU12B2**



- Data for the speed – torque characteristics is based on Oriental Motor's internal measurement conditions. If the conditions are changed, the characteristics may also change as a result.
- If there is a "clean damper" entry in the speed – torque characteristics, the data is for a double shaft motor when a clean damper is equipped.
- Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C or less.


**● Motors**

Technical drawing of a mechanical part, showing a side view and a top view. The side view includes dimensions:  $\phi 5_{-0.012}^{+0.012}$  (h7),  $15_{+1}^{+1}$ ,  $L2$ ,  $L1$ ,  $20_{\pm 0.5}$ ,  $15_{\pm 0.25}$ ,  $4.5_{\pm 0.15}$ ,  $\phi 5_{-0.012}^{+0.012}$  (h7),  $\phi 22_{-0.021}^{+0.021}$  (h7),  $4.5_{\pm 0.15}$ ,  $3$ ,  $1.5$ ,  $2.7$ ,  $5.9$ , and  $9.7$ . The top view shows a square flange with dimensions:  $42$ ,  $31_{\pm 0.2}$ ,  $4 \times M3 \ 4.5 \text{ Deep}$ ,  $31_{\pm 0.2}$ ,  $42$ ,  $1$ ,  $(6)_{\pm 0.2}$ ,  $5$ ,  $23$ , and  $25$ .

- \*1 The length of the shaft flat on the double shaft model is  $15 \pm 0.25$ .

\*2 With connection cable

- These dimensions are for double shaft motors

For single shaft motors, ignore the shaded  areas.



# High-Resolution Type with Encoder

## Frame Size 42 mm (Bipolar 4 lead wires)

### Mini-Connector Type

## Specifications

Product Name	Maximum Holding Torque Nm	Rotor Inertia J: kgm <sup>2</sup>	Rated Current A/Phase	Voltage VDC	Winding Resistance Ω/Phase	Inductance mH/Phase	Basic Step Angle	Recommended Driver Product Name*
<b>PKP243MD15A2-R3F</b>	0.32	40×10 <sup>-7</sup>	1.5	2.7	1.8	5.1	0.9°	<b>CVD223FBR-K</b>
<b>PKP244MD15A2-R3F</b>	0.42	59×10 <sup>-7</sup>		3.2	2.1	6		
<b>PKP245MD15A2-R3F</b>	0.61	79×10 <sup>-7</sup>		3	2	6.6		
<b>PKP246MD15A2-R3F</b>	0.82	117×10 <sup>-7</sup>		3.9	2.6	9		

● A letter "L" (line driver output) indicating the encoder output circuit configuration is specified where the box ■ is located in the product name. For voltage output, there is no letter in the ■ box.

● Refer to the common specifications page for encoder specifications.


\*See "Drivers for 2-Phase / 5-Phase Motors" page for drivers that can be used in combination.

### Note


● Be sure to set the driver current at or below the motor rated current. If the motor rated current is exceeded, the product will be damaged.

## Speed - Torque Characteristics (Reference values) fs: Max. Starting Frequency


### PKP243MD15A2-R3F

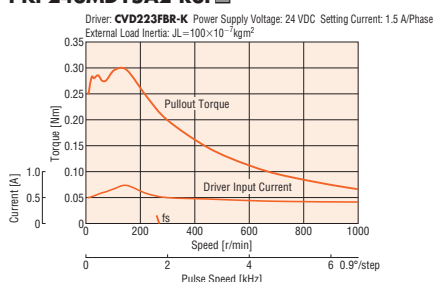


### PKP244MD15A2-R3F

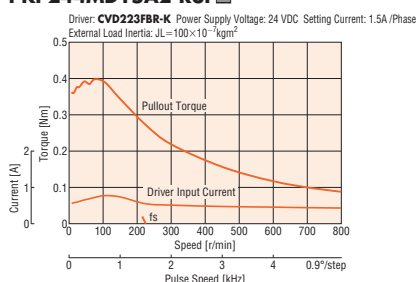

### PKP245MD15A2-R3F

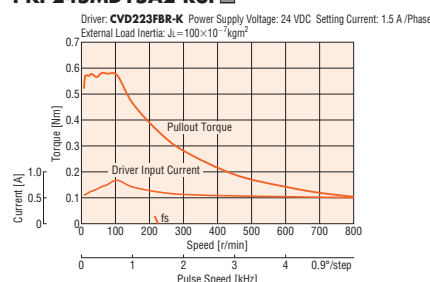

### PKP246MD15A2-R3F

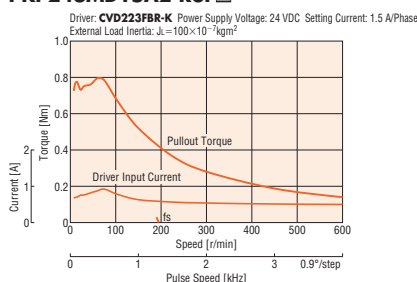

### Note

● Data for the speed – torque characteristics is based on Oriental Motor's internal measurement conditions. If the conditions are changed, the characteristics may also change as a result.

● The data in the speed - torque characteristics represents the use of an external load inertia.

● Depending on the driving conditions, a considerable amount of heat may be generated by the motor. To protect the encoder, be sure to keep the motor case temperature at 85°C max.

● The characteristics are the same if combined with an RS-485 communication type driver.

## Dimensions (Unit = mm)

### Motor

Product Name	L	Mass [kg]
<b>PKP243MD15A2-R3F</b>	46.5	0.25
<b>PKP244MD15A2-R3F</b>	52.5	0.32
<b>PKP245MD15A2-R3F</b>	60.5	0.39
<b>PKP246MD15A2-R3F</b>	72.5	0.52


● Applicable Connector (Molex)

	Motor (HIROSE ELECTRIC CO., LTD.)	Encoder (Molex)
Connector Housing	MDF97A-5S-3.5C	51021-0800
Contact	MDF97-22SC	50079-8100
Crimp Tool	HT801/MDF97-22S	57177-5000

### Connection Cable (Sold separately)

#### Motor Connection Cable

Product Name	Length L [m]
<b>LC2B06E</b>	0.6
<b>LC2B10E</b>	1

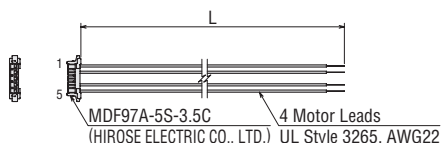

#### Encoder Connection Cable


##### For Voltage Output

Product Name	Length L [m]
<b>LC05A-006</b>	0.6

##### For Line Driver Output

Product Name	Length L [m]
<b>LC08A-006</b>	0.6

● Refer to the cables page for dimensions.

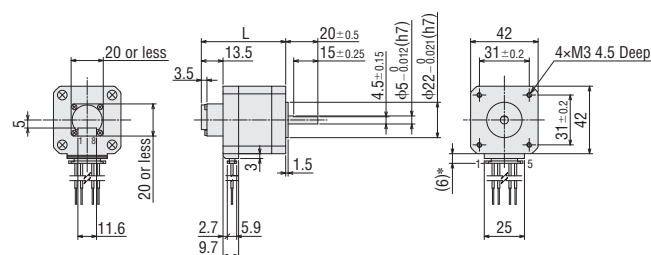

\*With connection cable

## Inner Wiring Diagram of Motor

Wiring Diagram No.: Model A①

● Refer to the motor inner wiring page for an inner wiring diagram of the motor.

2-Phase  
Motors  
PKP

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

Flat  
Type

SH Geared  
Type

CS Geared  
Type

Common  
Specifications

Inner  
Wiring  
of Motor

5-Phase  
Motors  
PKP

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

TS Geared  
Type

Common  
Specifications

Motor  
Pin  
Arrangement

Drivers for  
2-Phase/5-Phase  
Motors

Cables

Peripheral  
Equipment

● A letter "L" (line driver output) indicating the encoder output circuit configuration is specified where the box ■ is located in the product name. For voltage output, there is no letter in the ■ box.

- Motor Frame Size
- 13 mm
- 20 mm
- 28 mm
- 35 mm
- 42 mm
- 50 mm
- 51 mm
- 56.4 mm
- 60 mm
- 61 mm
- 85 mm
- 90 mm

# High-Resolution Type with Electromagnetic Brake

Frame Size 42 mm (Bipolar 4 lead wires)

## Connector Type

### Specifications

Product Name	Maximum Holding Torque Nm	Rotor Inertia J: kgm <sup>2</sup>	Rated Current A/Phase	Voltage VDC	Winding Resistance Ω/Phase	Inductance mH/Phase	Basic Step Angle	Electromagnetic Brake Static Friction Torque Nm
<b>PKP243MD15M</b>	0.30	48×10 <sup>-7</sup> *	1.5	2.85	1.9	6.6	0.9°	0.3
<b>PKP244MD15M</b>	0.42	69×10 <sup>-7</sup> *		3.9	2.6	7.6		

● Refer to the common specification page for electromagnetic brake specifications.


\*This value is including the electromagnetic brake inertia.

#### Note


● Be sure to set the driver current at or below the motor rated current. If the motor rated current is exceeded, the product will be damaged.

### Speed – Torque Characteristics (Reference values) fs: Max. Starting Frequency

**PKP243MD15M**

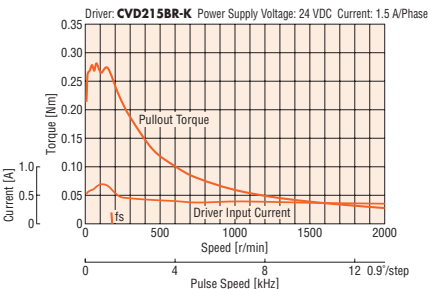

**PKP244MD15M**

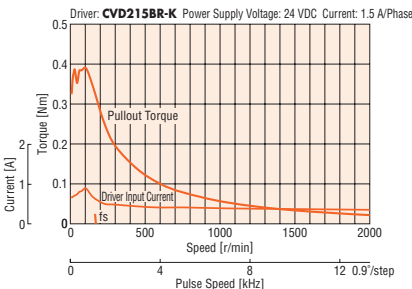

#### Note

● Data for the speed – torque characteristics is based on Oriental Motor's internal measurement conditions. If the conditions are changed, the characteristics may also change as a result.

● Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C or less.

● The characteristics are the same when RS-485 communication type driver is used in combination.

### Dimensions (Unit: mm)

#### ● Motors

2D & 3D CAD


Product Name	L	Mass [kg]
<b>PKP243MD15M</b>	67	0.36
<b>PKP244MD15M</b>	73	0.41

● Applicable Connector (Molex)

Connector Housing: 51103-0600

Contact: 50351-8100


Crimp Tool: 57295-5000

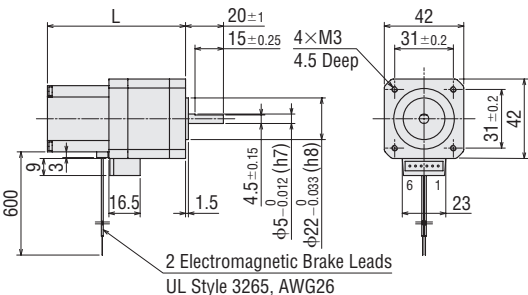

#### ● Connection Cables (Sold separately)

##### ◇ Motor Connection Cable

Product Name	Length L [m]
<b>LC2B06B</b>	0.6
<b>LC2B10B</b>	1

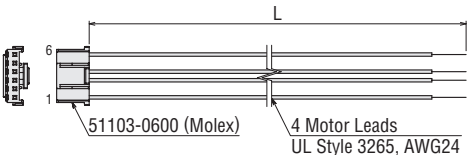

### Inner Wiring Diagram of Motor

Wiring Diagram No.: Model B③

● See "Inner Wiring Diagram of Motor" page for the inner wiring diagram of the motor.

# High-Resolution Type with Electromagnetic Brake

Frame Size 42 mm (Unipolar 6 lead wires)

## Connector Type

## Specifications

Product Name	Maximum Holding Torque Nm	Rotor Inertia J: kgm <sup>2</sup>	Rated Current A/Phase	Voltage VDC	Winding Resistance Ω/Phase	Inductance mH/Phase	Basic Step Angle	Electromagnetic Brake Static Friction Torque Nm
<b>PKP243MU09M</b>	0.25	$48 \times 10^{-7}$ *	0.95	4.47	4.7	6.6	0.9°	0.3
<b>PKP244MU12M</b>	0.35	$69 \times 10^{-7}$ *	1.2	4.8	4	6		

● Refer to the common specification page for electromagnetic brake specifications.


\*The Inertia of the electromagnetic brake is included in the value.

### Note


● Be sure to set the driver current at or below the motor rated current. If the motor rated current is exceeded, the product will be damaged.

## Speed – Torque Characteristics (Reference values) $f_s$ : Max. Starting Frequency

### PKP243MU09M

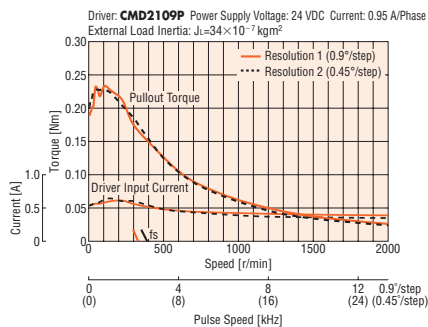

### PKP244MU12M

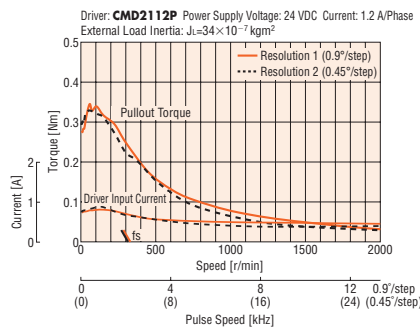

### Note

● Data for the speed – torque characteristics is based on Oriental Motor's internal measurement conditions. If the conditions are changed, the characteristics may also change as a result.

● The data in the speed – torque characteristics represents the use of an external load inertia.

● Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C or less.

## Dimensions (Unit: mm)

### ● Motors


Product Name	L	Mass [kg]
<b>PKP243MU09M</b>	67	0.36
<b>PKP244MU12M</b>	73	0.41

● Applicable Connector (Molex)

Connector Housing: 51103-0600

Contact: 50351-8100


Crimp Tool: 57295-5000

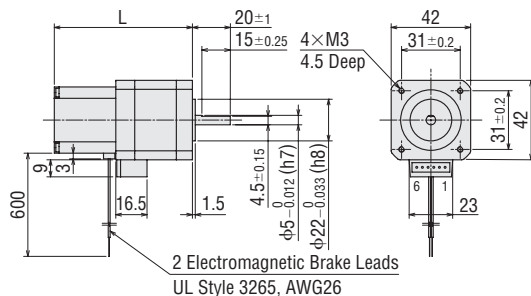

### ● Connection Cable (Sold separately)

#### ◇ Motor Connection Cable

Product Name	Length L [m]
<b>LC2U06B</b>	0.6
<b>LC2U10B</b>	1

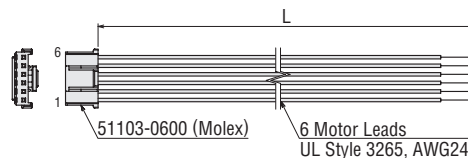

## Inner Wiring Diagram of Motor

Wiring Diagram No.: Model B④

● Refer to the motor inner wiring page for an inner wiring diagram of the motor.

2-Phase  
Motors  
PKP

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

Flat  
Type

SH Geared  
Type

CS Geared  
Type

Common  
Specifications

Inner  
Wiring  
of Motor

5-Phase  
Motors  
PKP

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

TS Geared  
Type

Common  
Specifications

Motor  
Pin  
Arrangement

Drivers for  
2-Phase/5-Phase  
Motors

Cables

Peripheral  
Equipment

- Motor  
Frame Size
- 13 mm
- 20 mm
- 28 mm
- 35 mm
- 42 mm
- 50 mm
- 51 mm
- 56.4 mm
- 60 mm
- 61 mm
- 85 mm
- 90 mm

# High-Resolution Type

## Frame Size 56.4 mm (Bipolar 4 lead wires)

### Mini-Connector Type

### Specifications

Product Name	Maximum Holding Torque Nm	Rotor Inertia J: kgm <sup>2</sup>	Rated Current A/Phase	Voltage VDC	Winding Resistance Ω/Phase	Inductance mH/Phase	Basic Step Angle	Recommended Driver Product Name*
<b>PKP264MD28</b> <span style="border: 1px solid black; padding: 0 2px;">2</span>	0.7	150×10 <sup>-7</sup>	2.8	2	0.73	2.1	0.9°	<b>CVD228BR-K</b>
<b>PKP266MD28</b> <span style="border: 1px solid black; padding: 0 2px;">2</span>	1.4	310×10 <sup>-7</sup>		1.8	0.65	3		
<b>PKP268MD28</b> <span style="border: 1px solid black; padding: 0 2px;">2</span>	2.3	520×10 <sup>-7</sup>		2.7	0.97	4.7		


● The box   in the product name indicates the shaft **A** (single shaft) or **B** (double shaft).

\*See "Drivers for 2-Phase / 5-Phase Motors" page for drivers that can be used in combination.

#### Note

● Be sure to set the driver current at or below the motor rated current. If the motor rated current is exceeded, the product will be damaged.

### Speed – Torque Characteristics (Reference values) fs: Max. Starting Frequency

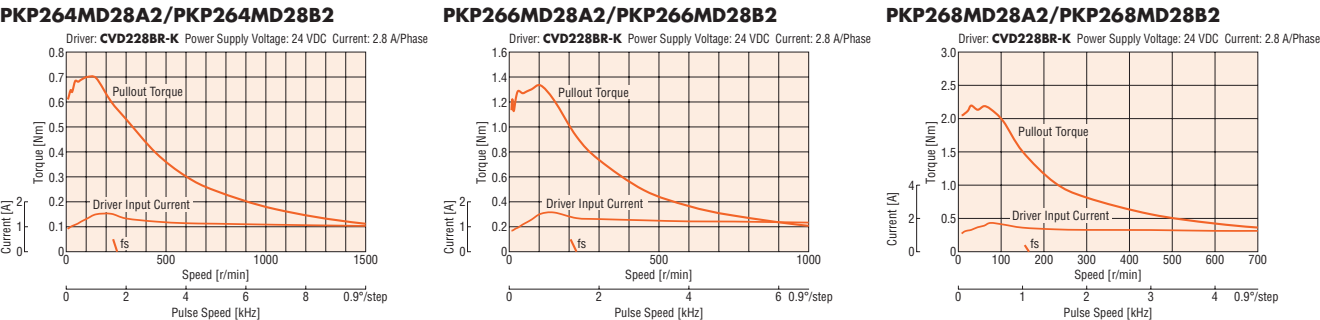

#### Note

● Data for the speed – torque characteristics is based on Oriental Motor's internal measurement conditions. If the conditions are changed, the characteristics may also change as a result.

● Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C or less.

● The characteristics are the same when RS-485 communication type driver is used in combination.

### Dimensions (Unit: mm)

#### ● Motors

Product Name	L1	L2	Mass [kg]
<b>PKP264MD28A2</b>	39	—	0.45
<b>PKP264MD28B2</b>		62	
<b>PKP266MD28A2</b>	54	—	0.7
<b>PKP266MD28B2</b>		77	
<b>PKP268MD28A2</b>	76	—	1.1
<b>PKP268MD28B2</b>		99	

● Applicable Connectors

Connector Housing: MDF97A-5S-3.5C (HIROSE ELECTRIC CO., LTD.)



Contact: MDF97-22SC (HIROSE ELECTRIC CO., LTD.)

Crimp Tool: HT801/MDF97-22S (HIROSE ELECTRIC CO., LTD.)

#### ● Connection Cables (Sold separately)

##### ◇ Motor Connection Cable

Product Name	Length L [m]
<b>LC2B06E</b>	0.6
<b>LC2B10E</b>	1

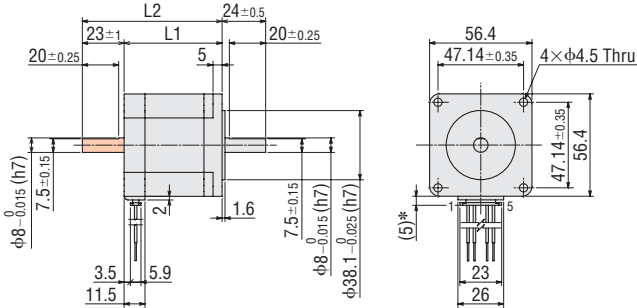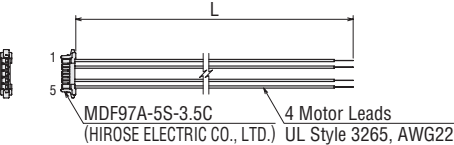

\*With connection cable

● These dimensions are for double shaft motors.

For single shaft motors, ignore the shaded  areas.

### Inner Wiring Diagram of Motor

Wiring Diagram No.: Model A①

● See "Inner Wiring Diagram of Motor" page for the inner wiring diagram of the motor.



# High-Resolution Type Frame Size 56.4 mm (Bipolar 4 lead wires)

## Connector Type

## Specifications

Product Name	Maximum Holding Torque Nm	Rotor Inertia J: kgm <sup>2</sup>	Rated Current A/Phase	Voltage VDC	Winding Resistance Ω/Phase	Inductance mH/Phase	Basic Step Angle	Recommended Driver Product Name*
<b>PKP264MD28</b> □	0.6	$120 \times 10^{-7}$	2.8	2	0.73	2.1	0.9°	<b>CVD228BR-K</b>
<b>PKP266MD28</b> □	1.32	$290 \times 10^{-7}$		2.8	1	3.9		
<b>PKP268MD28</b> □	2.23	$490 \times 10^{-7}$		3.4	1.23	5.6		

● The box □ in the product name indicates the shaft **A** (single shaft) or **B** (double shaft).


\*See "Drivers for 2-Phase / 5-Phase Motors" page for drivers that can be used in combination.

### Note


● Be sure to set the driver current at or below the motor rated current. If the motor rated current is exceeded, the product will be damaged.

## Speed – Torque Characteristics (Reference values) fs: Max. Starting Frequency


**PKP264MD28A/PKP264MD28B**

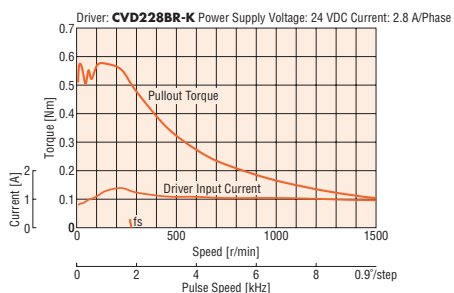

**PKP266MD28A/PKP266MD28B**

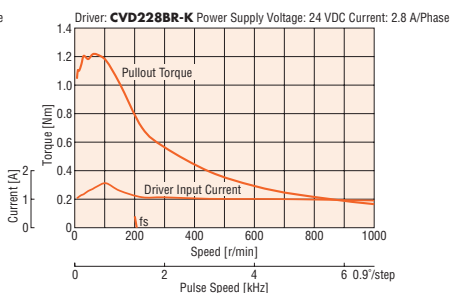

**PKP268MD28A/PKP268MD28B**

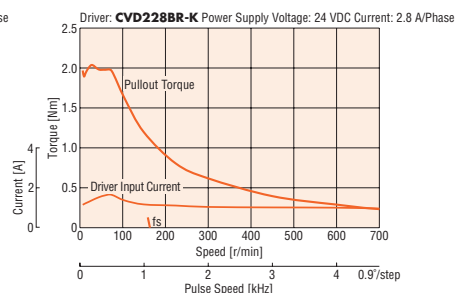

### Note

● Data for the speed – torque characteristics is based on Oriental Motor's internal measurement conditions. If the conditions are changed, the characteristics may also change as a result.

● Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C or less.

● The characteristics are the same if combined with an RS-485 communication type driver.

## Dimensions (Unit: mm)

### Motors

Product Name	L1	L2	Mass [kg]
<b>PKP264MD28A</b>	39	—	0.46
<b>PKP264MD28B</b>		62	
<b>PKP266MD28A</b>	54	—	0.73
<b>PKP266MD28B</b>		77	
<b>PKP268MD28A</b>	76	—	1.1
<b>PKP268MD28B</b>		99	

### Applicable Connectors

Connector Housing: 51067-0600 (Molex)

Contact: 50217-9101 (Molex)



Crimp Tool: 57189-5000 (Molex)

57190-5000 (Molex)

### Connection Cable (Sold separately)

#### Motor Connection Cable

Product Name	Length L [m]
<b>LC2B06C</b>	0.6
<b>LC2B10C</b>	1

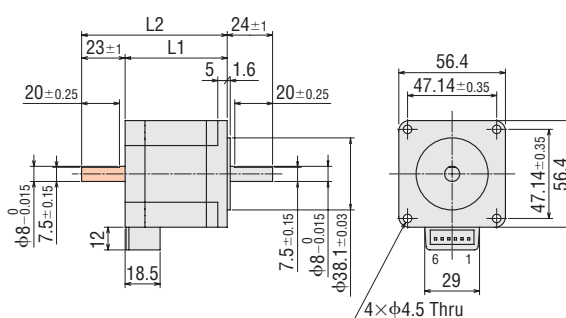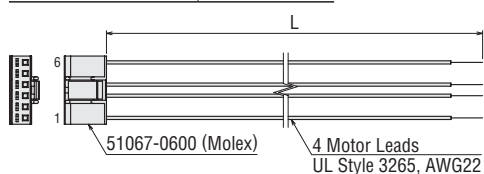

● These dimensions are for double shaft motors.

For single shaft motors, ignore the shaded areas.

## Inner Wiring Diagram of Motor

Wiring Diagram No.: Model B③

● Refer to the motor inner wiring page for an inner wiring diagram of the motor.

2-Phase  
Motors  
PKP

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

Flat  
Type

SH Geared  
Type

CS Geared  
Type

Common  
Specifications

Inner  
Wiring  
of Motor

5-Phase  
Motors  
PKP

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

TS Geared  
Type

Common  
Specifications

Motor  
Pin  
Arrangement

Drivers for  
2-Phase/5-Phase  
Motors

Cables

Peripheral  
Equipment

- Motor  
Frame Size
- 13 mm
- 20 mm
- 28 mm
- 35 mm
- 42 mm
- 50 mm
- 51 mm
- 56.4 mm
- 60 mm
- 61 mm
- 85 mm
- 90 mm

# High-Resolution Type Frame Size 56.4 mm (Unipolar 5 lead wires)

## Mini-Connector Type


### Specifications

Product Name	Maximum Holding Torque Nm	Rotor Inertia J: kgm <sup>2</sup>	Rated Current A/Phase	Voltage VDC	Winding Resistance Ω/Phase	Inductance mH/Phase	Basic Step Angle	Recommended Driver Product Name*
<b>PKP264MU20□2</b>	0.55	150×10 <sup>-7</sup>	2	2.9	1.45	2.1	0.9°	<b>CMD2120P</b>
<b>PKP266MU20□2</b>	1.2	310×10 <sup>-7</sup>		2.8	1.39	3.5		
<b>PKP268MU20□2</b>	1.8	520×10 <sup>-7</sup>		3.6	1.81	4.3		


- The box □ in the product name indicates the shaft **A** (single shaft) or **B** (double shaft).
  - \*See "Drivers for 2-Phase / 5-Phase Motors" page for details on the recommended drivers.
- Note
- Be sure to set the driver current at or below the motor rated current. If the motor rated current is exceeded, the product will be damaged.

### Speed – Torque Characteristics (Reference values) fs: Max. Starting Frequency


PKP264MU20A2/ PKP264MU20B2

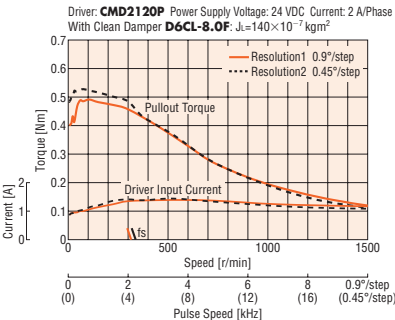

PKP266MU20A2/ PKP266MU20B2

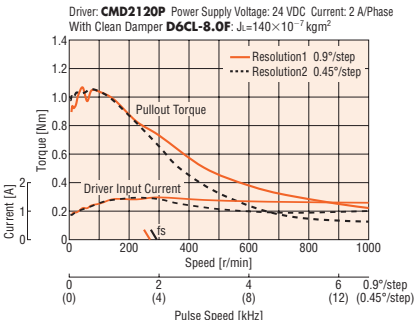

PKP268MU20A2/ PKP268MU20B2

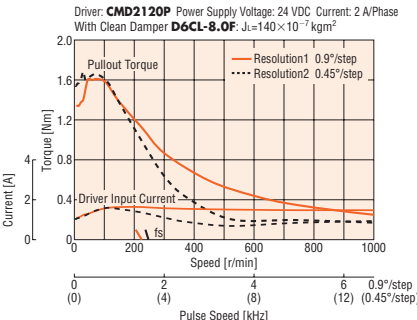


- Note
- Data for the speed – torque characteristics is based on Oriental Motor's internal measurement conditions. If the conditions are changed, the characteristics may also change as a result.
  - If there is a "clean damper" entry in the speed – torque characteristics, the data is for a double shaft motor when a clean damper is equipped.
  - Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C or less.

### Dimensions (Unit: mm)

#### ● Motors

Product Name	L1	L2	Mass [kg]
<b>PKP264MU20A2</b>	39	—	0.45
<b>PKP264MU20B2</b>		62	
<b>PKP266MU20A2</b>	54	—	0.7
<b>PKP266MU20B2</b>		77	
<b>PKP268MU20A2</b>	76	—	1.1
<b>PKP268MU20B2</b>		99	

- Applicable Connectors  
Connector Housing: MDF97A-5S-3.5C (HIROSE ELECTRIC CO., LTD.)  
Contact: MDF97-22SC (HIROSE ELECTRIC CO., LTD.)  
Crimp Tool: HT801/MDF97-22S (HIROSE ELECTRIC CO., LTD.)

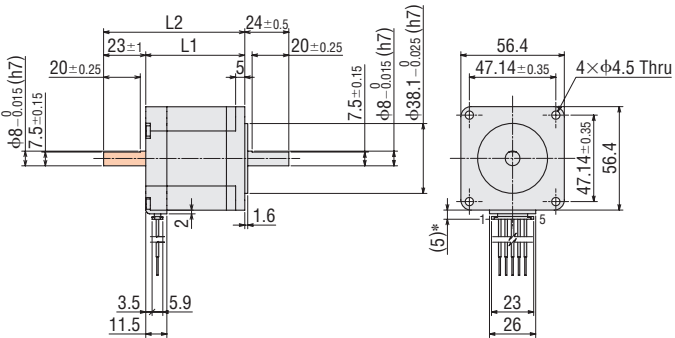


- \*With connection cable
- These dimensions are for double shaft motors.  
For single shaft motors, ignore the shaded areas.

#### ● Connection Cables (Sold separately)

##### ◇ Motor Connection Cable

Product Name	Length L [m]
<b>LC2U06E</b>	0.6
<b>LC2U10E</b>	1

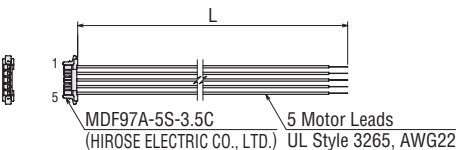

### Inner Wiring Diagram of Motor

Wiring Diagram No.: Model A②

- See "Inner Wiring Diagram of Motor" page for the inner wiring diagram of the motor.

# High-Resolution Type Frame Size 56.4 mm (Unipolar 6 lead wires)

## Connector Type

### Specifications

Product Name	Maximum Holding Torque Nm	Rotor Inertia J: kgm <sup>2</sup>	Rated Current A/Phase	Voltage VDC	Winding Resistance Ω/Phase	Inductance mH/Phase	Basic Step Angle	Recommended Driver Product Name*
PKP264MU20□	0.51	120×10 <sup>-7</sup>	2	2.9	1.45	2.1	0.9°	CMD2120P
PKP266MU20□	1.1	290×10 <sup>-7</sup>		4	2	3.9		
PKP268MU20□	1.75	490×10 <sup>-7</sup>		4.9	2.45	5.6		

● The box □ in the product name indicates the shaft **A** (single shaft) or **B** (double shaft).


\*See "Drivers for 2-Phase / 5-Phase Motors" page for details on the recommended drivers.

#### Note


● Be sure to set the driver current at or below the motor rated current. If the motor rated current is exceeded, the product will be damaged.

### Speed – Torque Characteristics (Reference values) fs: Max. Starting Frequency


#### PKP264MU20A/PKP264MU20B

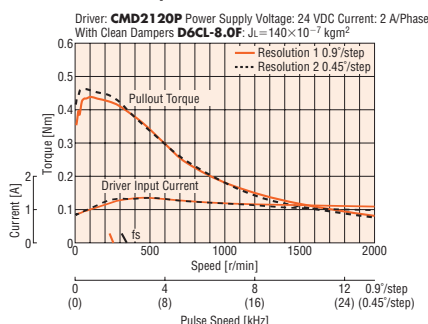

#### PKP266MU20A/PKP266MU20B

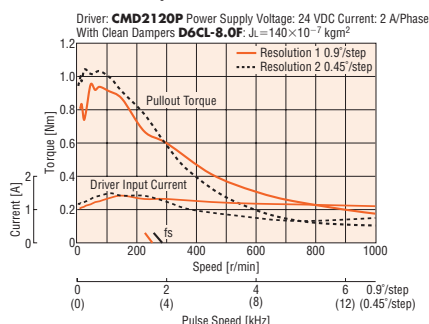

#### PKP268MU20A/PKP268MU20B

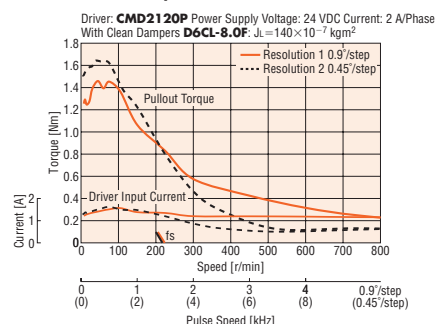

#### Note

● Data for the speed – torque characteristics is based on Oriental Motor's internal measurement conditions. If the conditions are changed, the characteristics may also change as a result.

● If there is a "clean damper" entry in the speed – torque characteristics, the data is for a double shaft motor when a clean damper is equipped.

● Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C or less.

### Dimensions (Unit: mm)

#### Motors

Product Name	L1	L2	Mass [kg]
PKP264MU20A	39	—	0.46
PKP264MU20B		62	
PKP266MU20A	54	—	0.73
PKP266MU20B		77	
PKP268MU20A	76	—	1.1
PKP268MU20B		99	

#### Applicable Connectors

Connector Housing: 51067-0600 (Molex)

Contact: 50217-9101 (Molex)



Crimp Tool: 57189-5000 (Molex)

57190-5000 (Molex)

#### Connection Cable (Sold separately)

##### Motor Connection Cable

Product Name	Length L [m]
LC2U06C	0.6
LC2U10C	1

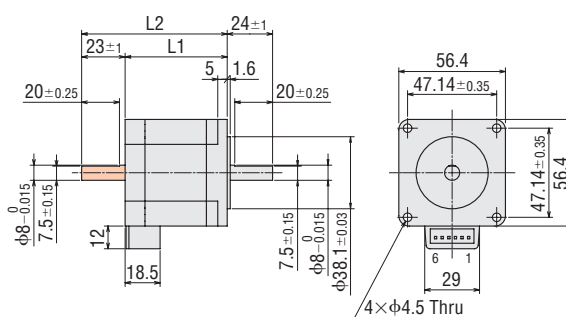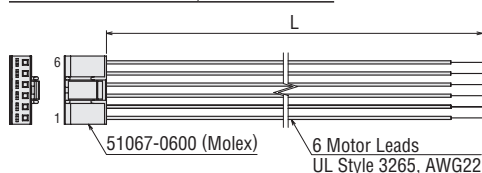

● These dimensions are for double shaft motors.

For single shaft motors, ignore the shaded areas.

### Inner Wiring Diagram of Motor

Wiring Diagram No.: Model B④

● Refer to the motor inner wiring page for an inner wiring diagram of the motor.

2-Phase  
Motors  
PKP

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

Flat  
Type

SH Geared  
Type

CS Geared  
Type

Common  
Specifications

Inner  
Wiring  
of Motor

5-Phase  
Motors  
PKP

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

TS Geared  
Type

Common  
Specifications

Motor  
Pin  
Arrangement

Drivers for  
2-Phase/5-Phase  
Motors

Cables

Peripheral  
Equipment



# High-Resolution Type with Electromagnetic Brake

Frame Size 56.4 mm (Bipolar 4 lead wires)

## Connector Type

## Specifications

Product Name	Maximum Holding Torque Nm	Rotor Inertia J: kgm <sup>2</sup>	Rated Current A/Phase	Voltage VDC	Winding Resistance Ω/Phase	Inductance mH/Phase	Basic Step Angle	Electromagnetic Brake Static Friction Torque Nm
<b>PKP264MD28M</b>	0.6	$270 \times 10^{-7}$ *	2.8	2	0.73	2.1	0.9°	1.5
<b>PKP266MD28M</b>	1.32	$440 \times 10^{-7}$ *		2.8	1	3.9		
<b>PKP268MD28M</b>	2.23	$640 \times 10^{-7}$ *		3.4	1.23	5.6		

● Refer to the common specification page for electromagnetic brake specifications.


\*This value is including the electromagnetic brake inertia.

### Note


● Be sure to set the driver current at or below the motor rated current. If the motor rated current is exceeded, the product will be damaged.

## Speed – Torque Characteristics (Reference values) fs: Max. Starting Frequency


### PKP264MD28M

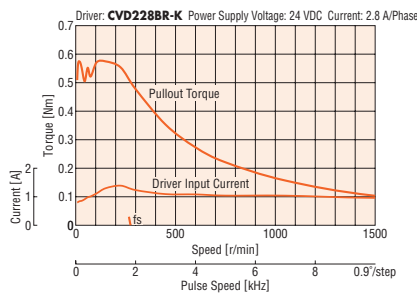

### PKP266MD28M

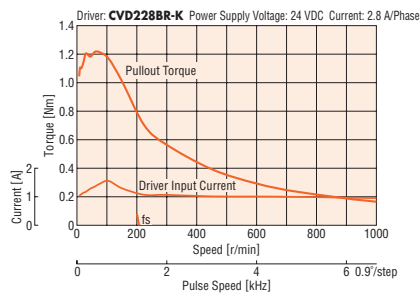

### PKP268MD28M

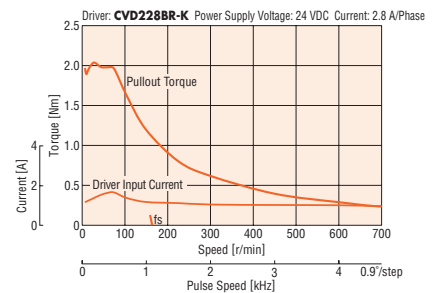

### Note

● Data for the speed – torque characteristics is based on Oriental Motor's internal measurement conditions. If the conditions are changed, the characteristics may also change as a result.

● Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C or less.

● The characteristics are the same when RS-485 communication type driver is used in combination.

## Dimensions (Unit: mm)

### ● Motors

Product Name	L	Mass [kg]
<b>PKP264MD28M</b>	75.5	0.76
<b>PKP266MD28M</b>	90.5	1.03
<b>PKP268MD28M</b>	112.5	1.4


● Applicable Connector (Molex)

Connector Housing: 51067-0600

Contact: 50217-9101

Crimp Tool: 57189-5000


57190-5000

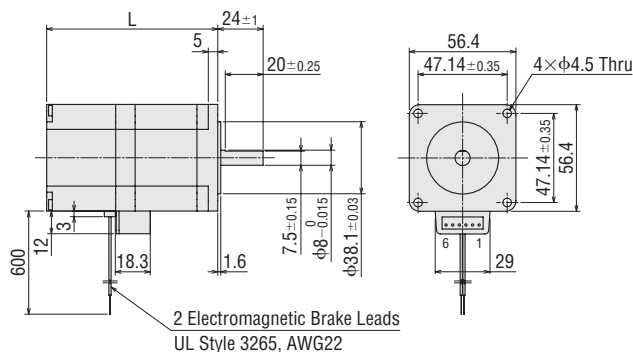

### ● Connection Cable (Sold separately)

#### ◇ Motor Connection Cable

Product Name	Length L [m]
<b>LC2B06C</b>	0.6
<b>LC2B10C</b>	1

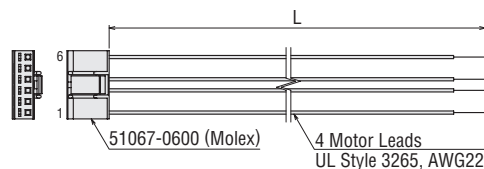

## Inner Wiring Diagram of Motor

Wiring Diagram No.: Model B③

● See "Inner Wiring Diagram of Motor" page for the inner wiring diagram of the motor.

2-Phase  
Motors  
PKP

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

Flat  
Type

SH Geared  
Type

CS Geared  
Type

Common  
Specifications

Inner  
Wiring  
of Motor

5-Phase  
Motors  
PKP

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

TS Geared  
Type

Common  
Specifications

Motor  
Pin  
Arrangement

Drivers for  
2-Phase/5-Phase  
Motors

Cables

Peripheral  
Equipment

- Motor Frame Size
- 13 mm
  - 20 mm
  - 28 mm
  - 35 mm
  - 42 mm
  - 50 mm
  - 51 mm
  - 56.4 mm
  - 60 mm
  - 61 mm
  - 85 mm
  - 90 mm

# High-Resolution Type with Electromagnetic Brake

Frame Size 56.4 mm (Unipolar 6 lead wires)


## Connector Type

### Specifications

Product Name	Maximum Holding Torque Nm	Rotor Inertia J: kgm <sup>2</sup>	Rated Current A/Phase	Voltage VDC	Winding Resistance Ω/Phase	Inductance mH/Phase	Basic Step Angle	Electromagnetic Brake Static Friction Torque Nm
<b>PKP264MU20M</b>	0.51	270×10 <sup>-7</sup> *	2	2.9	1.45	2.1	0.9°	1.5
<b>PKP266MU20M</b>	1.1	440×10 <sup>-7</sup> *		4	2	3.9		
<b>PKP268MU20M</b>	1.75	640×10 <sup>-7</sup> *		4.9	2.45	5.6		

- Refer to the common specification page for electromagnetic brake specifications.
  - \*This value is including the electromagnetic brake inertia.
- Note**
- Be sure to set the driver current at or below the motor rated current. If the motor rated current is exceeded, the product will be damaged.

### Speed – Torque Characteristics (Reference values) fs: Max. Starting Frequency

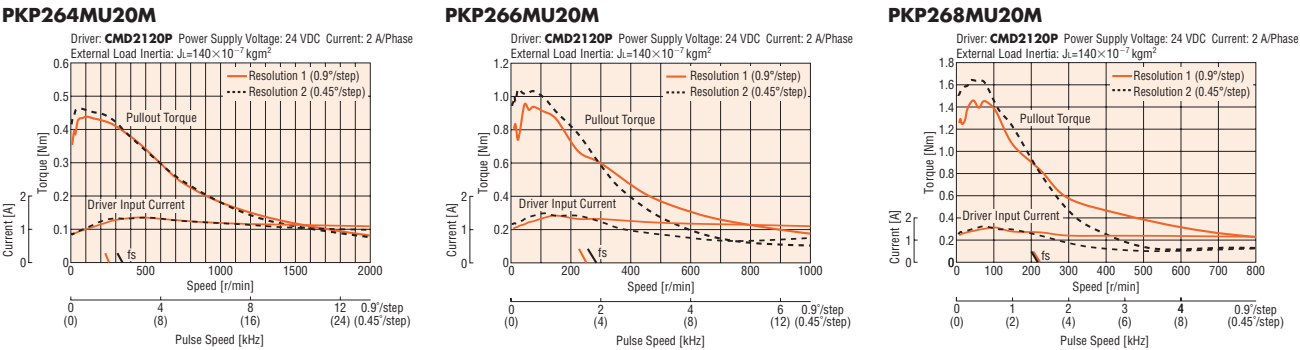


- Note**
- Data for the speed – torque characteristics is based on Oriental Motor's internal measurement conditions. If the conditions are changed, the characteristics may also change as a result.
  - The data in the speed – torque characteristics represents the use of an external load inertia.
  - Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C or less.

### Dimensions (Unit: mm)

#### Motors

Product Name	L	Mass [kg]
<b>PKP264MU20M</b>	75.5	0.76
<b>PKP266MU20M</b>	90.5	1.03
<b>PKP268MU20M</b>	112.5	1.4


- Applicable Connector (Molex)
- Connector Housing: 51067-0600
- Contact: 50217-9101
- Crimp Tool: 57189-5000
- 57190-5000

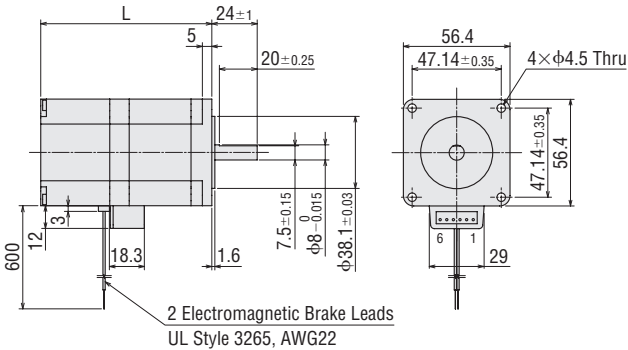

#### Connection Cable (Sold separately)

##### Motor Connection Cable

Product Name	Length L [m]
<b>LC2U06C</b>	0.6
<b>LC2U10C</b>	1

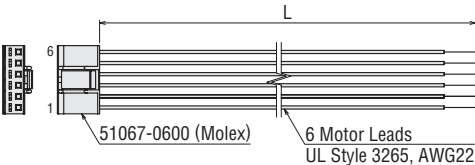

### Inner Wiring Diagram of Motor

- Wiring Diagram No.: Model B④
- See "Inner Wiring Diagram of Motor" page for the inner wiring diagram of the motor.

2-Phase Motors <b>PKP</b>
Features Product Line
Product Number Product Line
Standard Type
High- Resolution Type
Flat Type
<b>SH</b> Geared Type
<b>CS</b> Geared Type
Common Specifications
Inner Wiring of Motor

5-Phase Motors <b>PKP</b>
Features Product Line
Product Number Product Line
Standard Type
High- Resolution Type
<b>TS</b> Geared Type
Common Specifications
Motor Pin Arrangement

Drivers for 2-Phase/5-Phase Motors
--

Cables
--------

Peripheral Equipment
-------------------------



- Motor Frame Size
- 13 mm
- 20 mm
- 28 mm
- 35 mm
- 42 mm
- 50 mm
- 51 mm
- 56.4 mm
- 60 mm
- 61 mm
- 85 mm
- 90 mm

# Flat Type

## Frame Size 42 mm (Bipolar 4 lead wires)

### Mini-Connector Type

### Specifications

Product Name	Maximum Holding Torque Nm	Rotor Inertia J: kgm <sup>2</sup>	Rated Current A/Phase	Voltage VDC	Winding Resistance Ω/Phase	Inductance mH/Phase	Basic Step Angle	Recommended Driver Product Name*
<b>PKP242D23A2</b>	0.1	13×10 <sup>-7</sup>	2.3	1.4	0.61	0.53	1.8°	<b>CVD223FBR-K</b>


\*See "Drivers for 2-Phase / 5-Phase Motors" page for drivers that can be used in combination.

Note

- Be sure to set the driver current at or below the motor rated current. If the motor rated current is exceeded, the product will be damaged.

### Speed – Torque Characteristics (Reference values) fs: Max. Starting Frequency

**PKP242D23A2**  
Driver: **CVD223FBR-K** Power Supply Voltage: 24 VDC Current: 2.3 A/Phase

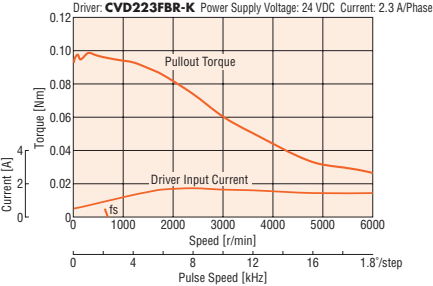

Note


- Data for the speed – torque characteristics is based on Oriental Motor's internal measurement conditions. If the conditions are changed, the characteristics may also change as a result.
- Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C or less.
- The characteristics are the same when RS-485 communication type driver is used in combination.

### Dimensions (Unit: mm)

#### Motors

Product Name	Mass [kg]
<b>PKP242D23A2</b>	0.11


- Applicable Connectors  
Connector Housing: MDF97A-5S-3.5C (HIROSE ELECTRIC CO., LTD.)  
Contact: MDF97-22SC (HIROSE ELECTRIC CO., LTD.)  
Crimp Tool: HT801/MDF97-22S (HIROSE ELECTRIC CO., LTD.)

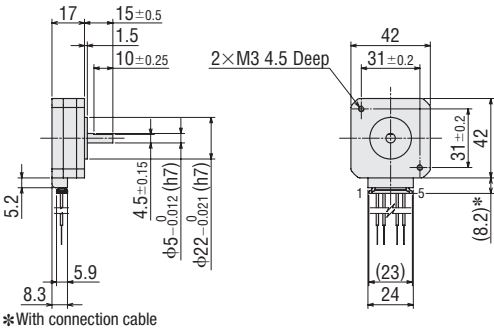

#### Connection Cables (Sold separately)

##### Motor Connection Cable

Product Name	Length L [m]
<b>LC2B06E</b>	0.6
<b>LC2B10E</b>	1

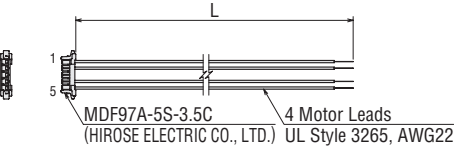

### Inner Wiring Diagram of Motor

Wiring Diagram No.: Model A①

- See "Inner Wiring Diagram of Motor" page for the inner wiring diagram of the motor.

# Flat Type

## Frame Size 60 mm (Bipolar 4 lead wires)

### Lead Wire Type

## Specifications

Product Name	Maximum Holding Torque Nm	Rotor Inertia J: kgm <sup>2</sup>	Rated Current A/Phase	Voltage VDC	Winding Resistance Ω/Phase	Inductance mH/Phase	Basic Step Angle	Recommended Driver Product Name*
<b>PKP262FD15AW</b>	0.18	$68 \times 10^{-7}$	1.5	2.25	1.5	1.4	1.8°	<b>CVD215BR-K</b>


\*See "Drivers for 2-Phase / 5-Phase Motors" page for drivers that can be used in combination.

#### Note

- Be sure to set the driver current at or below the motor rated current. If the motor rated current is exceeded, the product will be damaged.

## Speed – Torque Characteristics (Reference values) fs: Max. Starting Frequency

### PKP262FD15AW

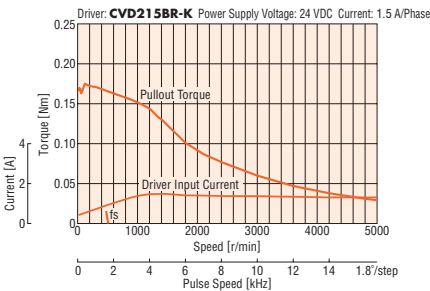


#### Note

- Data for the speed – torque characteristics is based on Oriental Motor's internal measurement conditions. If the conditions are changed, the characteristics may also change as a result.
- Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C or less.
- The characteristics are the same when RS-485 communication type driver is used in combination.

## Dimensions (Unit: mm)

### Motors

Product Name	Mass [kg]
<b>PKP262FD15AW</b>	0.2

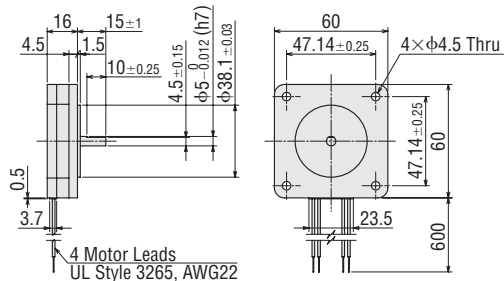

## Inner Wiring Diagram of Motor

Wiring Diagram No.: Model C⑤

- See "Inner Wiring Diagram of Motor" page for the inner wiring diagram of the motor.

2-Phase  
Motors  
PKP

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

Flat  
Type

SH Geared  
Type

CS Geared  
Type

Common  
Specifications

Inner  
Wiring  
of Motor

5-Phase  
Motors  
PKP

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

TS Geared  
Type

Common  
Specifications

Motor  
Pin  
Arrangement

Drivers for  
2-Phase/5-Phase  
Motors

Cables

Peripheral  
Equipment

- Motor Frame Size
- 13 mm
- 20 mm
- 28 mm
- 35 mm
- 42 mm
- 50 mm
- 51 mm
- 56.4 mm
- 60 mm
- 61 mm
- 85 mm
- 90 mm

# Flat Type with Harmonic Gear

Frame Size 51 mm (Bipolar 4 lead wires)

Mini-Connector Type

## Specifications

Product Name	Maximum Holding Torque Nm	Rotor Inertia J: kgm <sup>2</sup>	Rated Current A/Phase	Voltage VDC	Winding Resistance Ω/Phase	Inductance mH/Phase	Basic Step Angle	Gear Ratio	Permissible Torque Nm	Maximum Instantaneous Torque Nm	Lost Motion (Load Torque) arcmin	Speed Range r/min	Recommended Driver Product Name*
PKP242D23A2-H50	1.8	17×10 <sup>-7</sup>	2.3	1.4	0.61	0.53	0.036°	50	1.8	3.3	1.5 max. (±0.09 Nm)	0 – 70	CVD223FBR-K
PKP242D23A2-H100	2.4						0.018°	100	2.4	4.8	1.5 max. (±0.12 Nm)	0 – 35	


\*See "Drivers for 2-Phase / 5-Phase Motors" page for drivers that can be used in combination.

### Note


- The rotor inertia represents a sum of the inertia of the harmonic gear converted to motor shaft values.
- Be sure to set the driver current at or below the motor rated current. If the motor rated current is exceeded, the product will be damaged.

## Speed – Torque Characteristics (Reference values) fs: Max. Starting Frequency

PKP242D23A2-H50

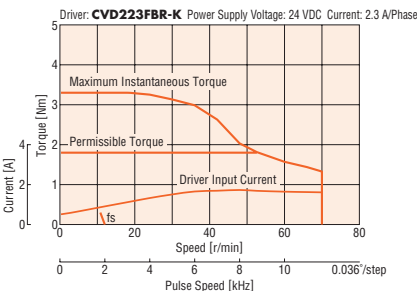

PKP242D23A2-H100

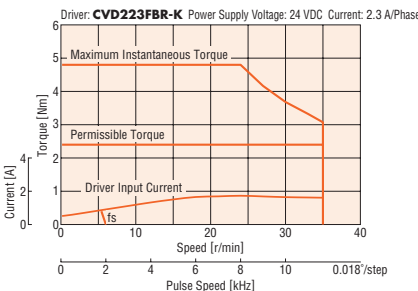

### Note

- Data for the speed – torque characteristics is based on Oriental Motor's internal measurement conditions. If the conditions are changed, the characteristics may also change as a result.
- The speed – torque characteristics is data when the gear case temperature is at 25 to 30°C. As the temperature decreases, the viscosity of the grease in the gear increases and the torque decreases.
- In order to prevent deterioration of the gear grease in the harmonic geared type, keep the temperature of the gear case at 70°C max.
- The characteristics are the same when RS-485 communication type driver is used in combination.


## Dimensions (Unit: mm)

### Motors

Product Name	Mass [kg]
PKP242D23A2-H50	0.32
PKP242D23A2-H100	

#### Applicable Connectors

Connector Housing: MDF97A-5S-3.5C (HIROSE ELECTRIC CO., LTD.)  
Contact: MDF97-22SC (HIROSE ELECTRIC CO., LTD.)  
Crimp Tool: HT801/MDF97-22S (HIROSE ELECTRIC CO., LTD.)

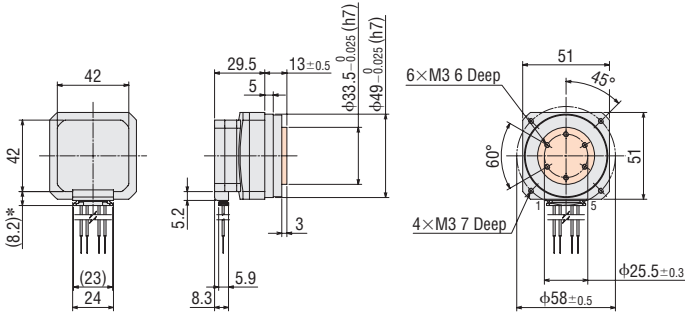


- The shaded areas are rotating parts.
- \*With connection cable

### Connection Cables (Sold separately)

#### Motor Connection Cable

Product Name	Length L [m]
LC2B06E	0.6
LC2B10E	1

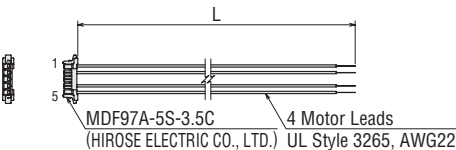

## Inner Wiring Diagram of Motor

Wiring Diagram No.: Model A①

- See "Inner Wiring Diagram of Motor" page for the inner wiring diagram of the motor.

# Flat Type with Harmonic Gear

Frame Size 61 mm (Bipolar 4 lead wires)

Lead Wire Type

## Specifications

Product Name	Maximum Holding Torque Nm	Rotor Inertia J: kgm <sup>2</sup>	Rated Current A/Phase	Voltage VDC	Winding Resistance Ω/Phase	Inductance mH/Phase	Basic Step Angle	Gear Ratio	Permissible Torque Nm	Maximum Instantaneous Torque Nm	Lost Motion (Load Torque) arcmin	Speed Range r/min	Recommended Driver Product Name*
PKP262FD15AW-H50S	3.5	83×10 <sup>-7</sup>	1.5	1.65	1.1	0.8	0.036°	50	3.5	*	1.5 max. (±0.17 Nm)	0 to 70	CVD215BR-K
PKP262FD15AW-H100S	5						0.018°	100	5	*	1.5 max. (±0.25 Nm)	0 to 35	

\*For the output torque of the geared motor, refer to the speed-torque characteristics.


\*See "Drivers for 2-Phase / 5-Phase Motors" page for drivers that can be used in combination.

### Note


- The rotor inertia represents a sum of the inertia of the harmonic gear converted to motor shaft values.
- Be sure to set the driver current at or below the motor rated current. If the motor rated current is exceeded, the product will be damaged.

## Speed – Torque Characteristics (Reference values) fs: Max. Starting Frequency

### PKP262FD15AW-H50S

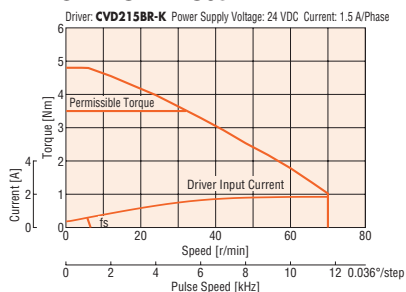

### PKP262FD15AW-H100S

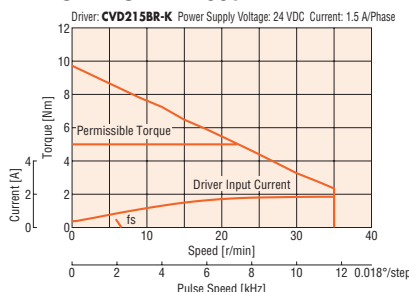


### Note

- Data for the speed – torque characteristics is based on Oriental Motor's internal measurement conditions. If the conditions are changed, the characteristics may also change as a result.
- The speed – torque characteristics is data when the gear case temperature is at 25 to 30°C. As the temperature decreases, the viscosity of the grease in the gear increases and the torque decreases.
- In order to prevent deterioration of the gear grease in the harmonic geared type, keep the temperature of the gear case at 70°C max.
- The characteristics are the same when RS-485 communication type driver is used in combination.

## Dimensions (Unit: mm)

### Motors

Product Name	Mass [kg]
PKP262FD15AW-H50S	0.54
PKP262FD15AW-H100S	

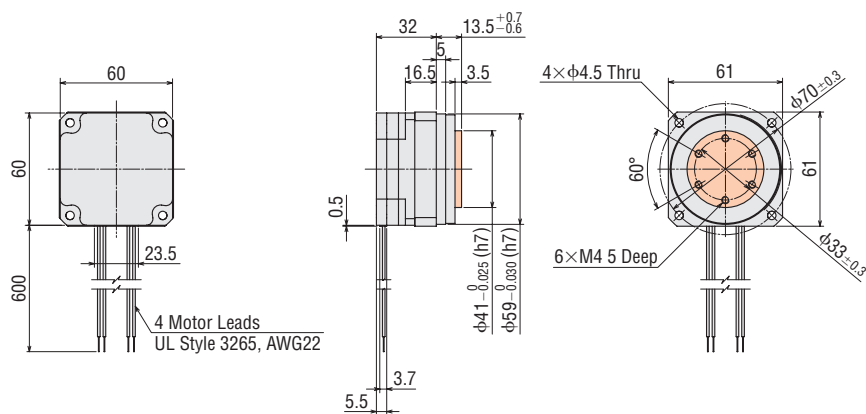

● The shaded areas are rotating parts.

## Inner Wiring Diagram of Motor

Wiring Diagram No.: Model C⑤

- See "Inner Wiring Diagram of Motor" page for the inner wiring diagram of the motor.

2-Phase  
Motors  
PKP

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

Flat  
Type

SH Geared  
Type

CS Geared  
Type

Common  
Specifications

Inner  
Wiring  
of Motor

5-Phase  
Motors  
PKP

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

TS Geared  
Type

Common  
Specifications

Motor  
Pin  
Arrangement

Drivers for  
2-Phase/5-Phase  
Motors

Cables

Peripheral  
Equipment

# SH Geared Type Frame Size 28 mm (Bipolar 4 lead wires)

## Connector Type

## Specifications

Product Name	Maximum Holding Torque Nm	Rotor Inertia J: kgm <sup>2</sup>	Rated Current A/Phase	Voltage VDC	Winding Resistance Ω/Phase	Inductance mH/Phase	Basic Step Angle	Gear Ratio	Permissible Torque Nm	Speed Range r/min	Backlash arcmin	Recommended Driver Product Name*
PKP223D15-SG7.2	0.3	9×10 <sup>-7</sup>	1.5	1.8	1.2	0.74	0.25°	7.2	0.3	0 – 416	90 (1.5)	CVD215BR-K
PKP223D15-SG9							0.2°	9		0 – 333		
PKP223D15-SG10							0.18°	10		0 – 300		
PKP223D15-SG18	0.4						0.1°	18	0.4	0 – 166		
PKP223D15-SG36							0.05°	36		0 – 83		

● The box □ in the product name indicates the shaft **A** (single shaft) or **B** (double shaft).


\*See "Drivers for 2-Phase / 5-Phase Motors" page for drivers that can be used in combination.

### Note


● Be sure to set the driver current at or below the motor rated current. If the motor rated current is exceeded, the product will be damaged.

## Speed – Torque Characteristics (Reference values) fs: Max. Starting Frequency


PKP223D15A-SG7.2/ PKP223D15B-SG7.2

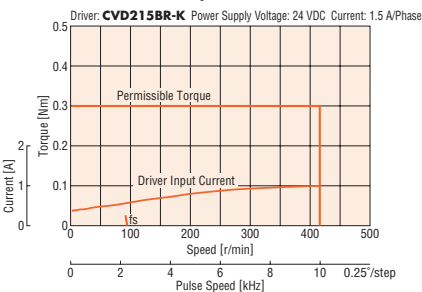


PKP223D15A-SG9/ PKP223D15B-SG9

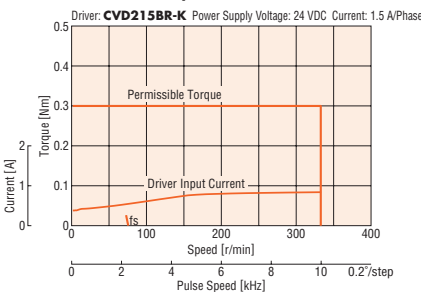


PKP223D15A-SG10/ PKP223D15B-SG10

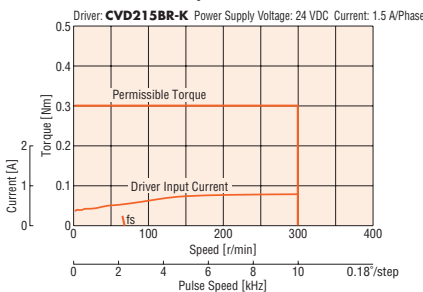

PKP223D15A-SG18/ PKP223D15B-SG18

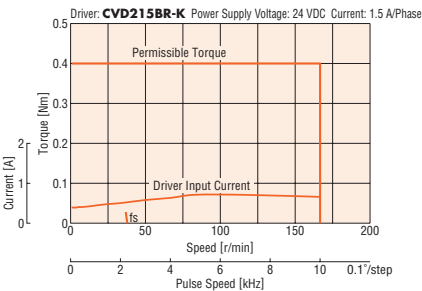

PKP223D15A-SG36/ PKP223D15B-SG36

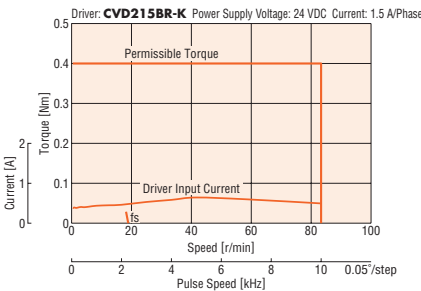

### Note

● Data for the speed – torque characteristics is based on Oriental Motor's internal measurement conditions. If the conditions are changed, the characteristics may also change as a result.

● Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C or less.

● The characteristics are the same when RS-485 communication type driver is used in combination.

## Dimensions (Unit: mm)

### ● Motors

Product Name	Gear Ratio	Mass [kg]
PKP223D15A-SG□	7.2, 9, 10, 18, 36	0.16
PKP223D15B-SG□		

● The box □ in the product name indicates a number representing the gear ratio.

● Applicable Connectors

Connector Housing: 51065-0600 (Molex)



Contact: 50212-8100 (Molex)

Crimp Tool: 57176-5000 (Molex)

### ● Connection Cables (Sold separately)

#### ◇ Motor Connection Cable

Product Name	Length L [m]
LC2B06A	0.6
LC2B10A	1

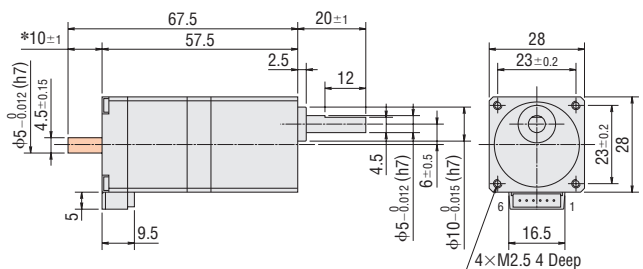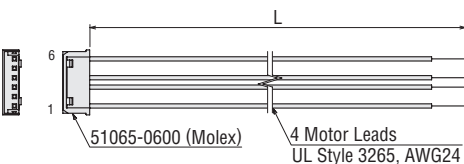

\*The length of the shaft flat on the double shaft model is 10±0.25.

● These dimensions are for double shaft motors.

For single shaft motors, ignore the shaded areas.

## Inner Wiring Diagram of Motor

Wiring Diagram No.: Model B③

● See "Inner Wiring Diagram of Motor" page for the inner wiring diagram of the motor.

# SH Geared Type

Frame Size 28 mm (Unipolar 6 lead wires)  
Connector Type

## Specifications

Product Name	Maximum Holding Torque Nm	Rotor Inertia J: kgm <sup>2</sup>	Rated Current A/Phase	Voltage VDC	Winding Resistance Ω/Phase	Inductance mH/Phase	Basic Step Angle	Gear Ratio	Permissible Torque Nm	Speed Range r/min	Backlash arcmin	Recommended Driver Product Name*
PKP223U09□-SG7.2	0.3	9×10 <sup>-7</sup>	0.95	2.66	2.8	1	0.25°	7.2	0.3	0 – 416	90 (1.5°)	CMD2109P
PKP223U09□-SG9							0.2°	9		0 – 333		
PKP223U09□-SG10							0.18°	10		0 – 300		
PKP223U09□-SG18	0.4	9×10 <sup>-7</sup>	0.95	2.66	2.8	1	0.1°	18	0.4	0 – 166	90 (1.5°)	CMD2109P
PKP223U09□-SG36							0.05°	36		0 – 83		

● The box □ in the product name indicates the shaft **A** (single shaft) or **B** (double shaft).


\*See "Drivers for 2-Phase / 5-Phase Motors" page for details on the recommended drivers.

**Note**


● Be sure to set the driver current at or below the motor rated current. If the motor rated current is exceeded, the product will be damaged.

## Speed – Torque Characteristics (Reference values) fs: Max. Starting Frequency


PKP223U09A-SG7.2/PKP223U09B-SG7.2

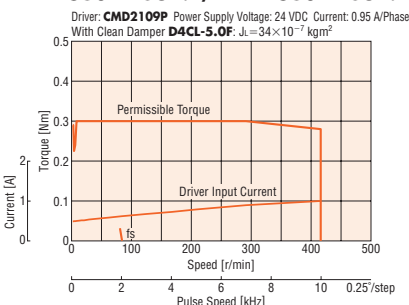


PKP223U09A-SG9/PKP223U09B-SG9

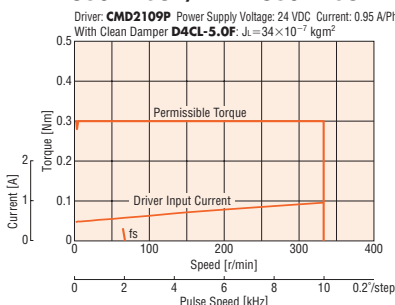


PKP223U09A-SG10/PKP223U09B-SG10

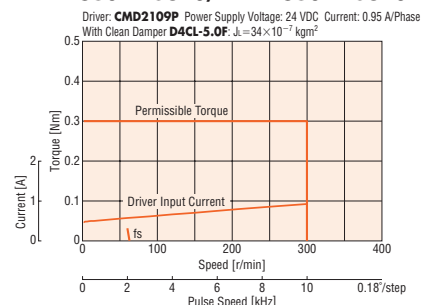

PKP223U09A-SG18/PKP223U09B-SG18

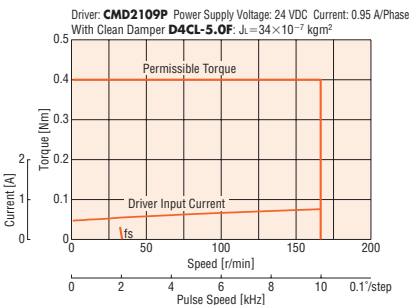

PKP223U09A-SG36/PKP223U09B-SG36

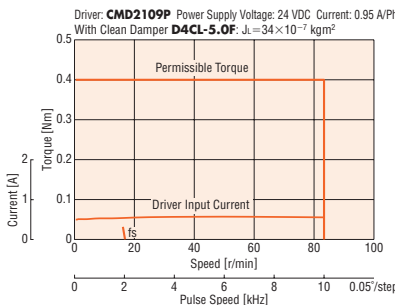

**Note**

● Data for the speed – torque characteristics is based on Oriental Motor's internal measurement conditions. If the conditions are changed, the characteristics may also change as a result.

● If there is a "clean damper" entry in the speed – torque characteristics, the data is for a double shaft motor when a clean damper is equipped.

● Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C or less.

## Dimensions (Unit: mm)

### Motors

Product Name	Gear Ratio	Mass [kg]
PKP223U09A-SG□	7.2, 9	0.16
PKP223U09B-SG□	10, 18, 36	

● The box □ in the product name indicates a number representing the gear ratio.

● Applicable Connectors

Connector Housing: 51065-0600 (Molex)



Contact: 50212-8100 (Molex)

Crimp Tool: 57176-5000 (Molex)

### Connection Cables (Sold separately)

#### Motor Connection Cable

Product Name	Length L [m]
LC2U06A	0.6
LC2U10A	1

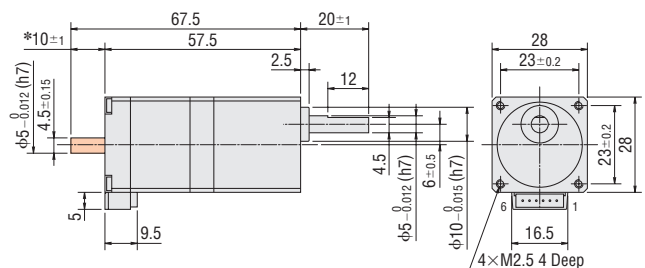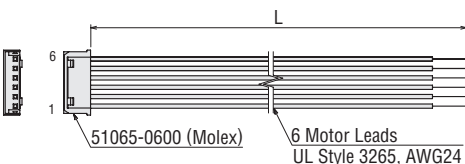

\*The length of the shaft flat on the double shaft model is 10±0.25.

● These dimensions are for double shaft motors.

For single shaft motors, ignore the shaded areas.

## Inner Wiring Diagram of Motor

Wiring Diagram No.: Model B④

● See "Inner Wiring Diagram of Motor" page for the inner wiring diagram of the motor.

2-Phase  
Motors  
PKP

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

Flat  
Type

SH Geared  
Type

CS Geared  
Type

Common  
Specifications

Inner  
Wiring  
of Motor

5-Phase  
Motors  
PKP

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

TS Geared  
Type

Common  
Specifications

Motor  
Pin  
Arrangement

Drivers for  
2-Phase/5-Phase  
Motors

Cables

Peripheral  
Equipment

- Motor  
Frame Size
- 13 mm
- 20 mm
- 28 mm
- 35 mm
- 42 mm
- 50 mm  
51 mm
- 56.4 mm
- 60 mm  
61 mm
- 85 mm  
90 mm

# SH Geared Type

## Frame Size 42 mm (Bipolar 4 lead wires)

### Mini-Connector Type

### Specifications

Product Name	Maximum Holding Torque Nm	Rotor Inertia J: kgm <sup>2</sup>	Rated Current A/Phase	Voltage VDC	Winding Resistance Ω/Phase	Inductance mH/Phase	Basic Step Angle	Gear Ratio	Permissible Torque Nm	Speed Range r/min	Backlash arcmin	Recommended Driver Product Name*
PKP243D15□2-SG3.6	0.2	36×10 <sup>-7</sup>	1.5	0.83	0.55	0.77	0.5°	3.6	0.2	0 – 833	90 (1.5°)	CVD223FBR-K
PKP243D23□2-SG3.6			2.3	0.87	0.38	0.41						
PKP243D15□2-SG7.2	0.4		1.5	0.83	0.55	0.77	0.25°	7.2	0.4	0 – 416		
PKP243D23□2-SG7.2			2.3	0.87	0.38	0.41						
PKP243D15□2-SG9	0.5		1.5	0.83	0.55	0.77	0.2°	9	0.5	0 – 333		
PKP243D23□2-SG9			2.3	0.87	0.38	0.41						
PKP243D15□2-SG10	0.56		1.5	0.83	0.55	0.77	0.18°	10	0.56	0 – 300		
PKP243D23□2-SG10			2.3	0.87	0.38	0.41						
PKP243D15□2-SG18	0.8		1.5	0.83	0.55	0.77	0.1°	18	0.8	0 – 166		
PKP243D23□2-SG18			2.3	0.87	0.38	0.41						
PKP243D15□2-SG36	0.8		1.5	0.83	0.55	0.77	0.05°	36	0.8	0 – 83		
PKP243D23□2-SG36			2.3	0.87	0.38	0.41						

● The box □ in the product name indicates the shaft **A** (single shaft) or **B** (double shaft).




\*See "Drivers for 2-Phase / 5-Phase Motors" page for drivers that can be used in combination.

#### Note


● Be sure to set the driver current at or below the motor rated current. If the motor rated current is exceeded, the product will be damaged.

### Speed – Torque Characteristics (Reference values) fs: Max. Starting Frequency


PKP243D15A2-SG3.6/PKP243D15B2-SG3.6   PKP243D15A2-SG7.2/PKP243D15B2-SG7.2   PKP243D15A2-SG9/PKP243D15B2-SG9

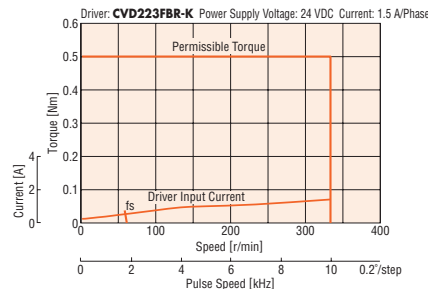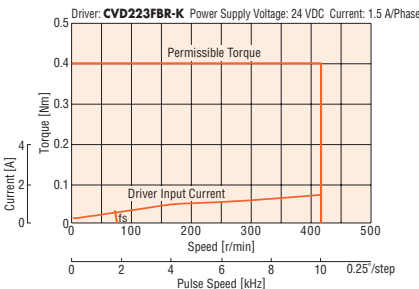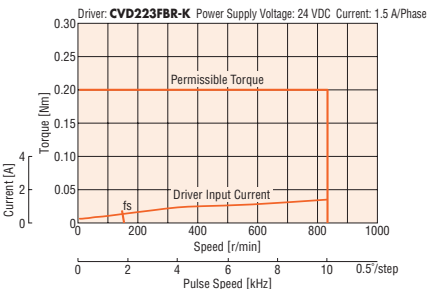


PKP243D15A2-SG10/PKP243D15B2-SG10

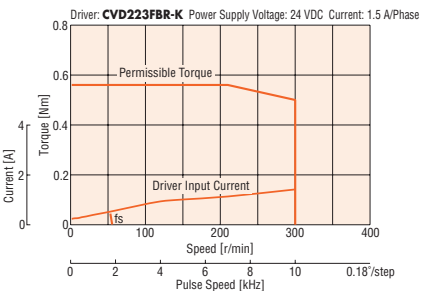

PKP243D15A2-SG18/PKP243D15B2-SG18

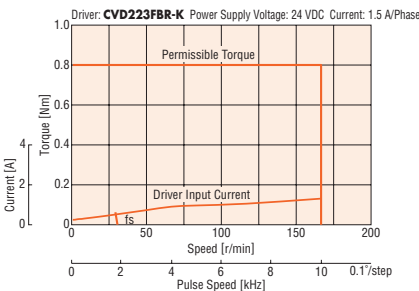

PKP243D15A2-SG36/PKP243D15B2-SG36

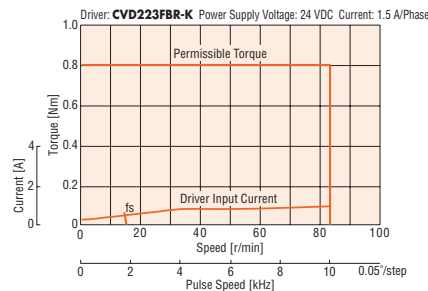

#### Note

- Data for the speed – torque characteristics is based on Oriental Motor's internal measurement conditions. If the conditions are changed, the characteristics may also change as a result.
- Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C or less.
- The characteristics are the same when RS-485 communication type driver is used in combination.





- Motor  
Frame Size
- 13 mm
- 20 mm
- 28 mm
- 35 mm
- 42 mm
- 50 mm
- 51 mm
- 56.4 mm
- 60 mm
- 61 mm
- 85 mm
- 90 mm

# SH Geared Type

## Frame Size 42 mm (Unipolar 5 lead wires)

### Mini-Connector Type

### Specifications

Product Name	Maximum Holding Torque	Rotor Inertia	Rated Current	Voltage	Winding Resistance	Inductance	Basic Step Angle	Gear Ratio	Permissible Torque	Speed Range	Backlash	Recommended Driver Product Name*
	Nm	J: kgm <sup>2</sup>	A/Phase	VDC	Ω/Phase	mH/Phase			Nm	r/min	arcmin	
PKP243U09□2-SG3.6	0.2	36×10 <sup>-7</sup>	0.95	2	2.1	1.8	0.5°	3.6	0.2	0 – 833	90 (1.5°)	CMD2109P
PKP243U09□2-SG7.2	0.4						0.25°	7.2	0.4	0 – 416	60 (1°)	
PKP243U09□2-SG9	0.5						0.2°	9	0.5	0 – 333		
PKP243U09□2-SG10	0.56						0.18°	10	0.56	0 – 300		
PKP243U09□2-SG18	0.8						0.1°	18	0.8	0 – 166		
PKP243U09□2-SG36	0.8						0.05°	36	0.8	0 – 83		

● The box □ in the product name indicates the shaft **A** (single shaft) or **B** (double shaft).




\*See "Drivers for 2-Phase / 5-Phase Motors" page for details on the recommended drivers.

#### Note


● Be sure to set the driver current at or below the motor rated current. If the motor rated current is exceeded, the product will be damaged.

### Speed – Torque Characteristics (Reference values) fs: Max. Starting Frequency


PKP243U09A2-SG3.6/PKP243U09B2-SG3.6    PKP243U09A2-SG7.2/PKP243U09B2-SG7.2    PKP243U09A2-SG9/PKP243U09B2-SG9

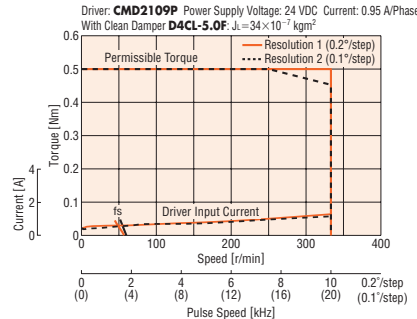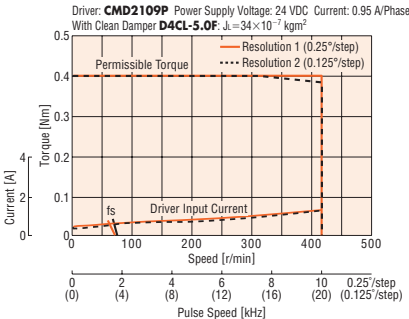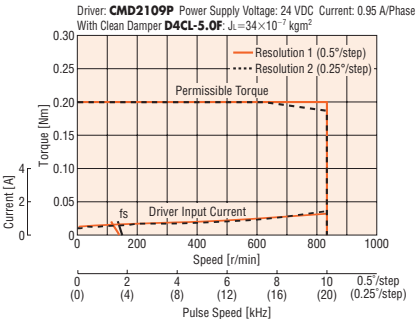


PKP243U09A2-SG10/PKP243U09B2-SG10

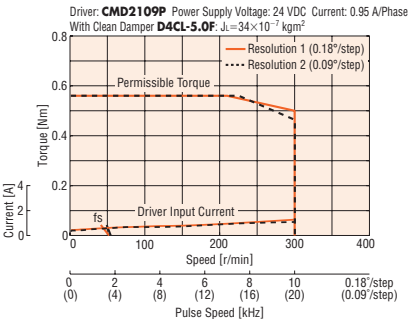

PKP243U09A2-SG18/PKP243U09B2-SG18

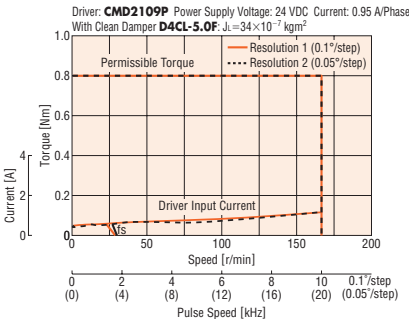

PKP243U09A2-SG36/PKP243U09B2-SG36

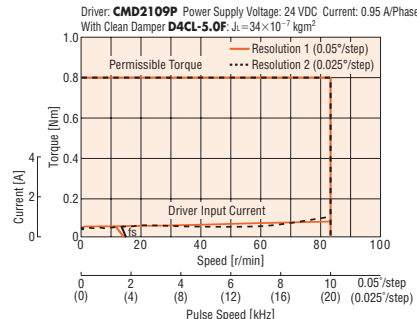

#### Note

● Data for the speed – torque characteristics is based on Oriental Motor's internal measurement conditions. If the conditions are changed, the characteristics may also change as a result.

● If there is a "clean damper" entry in the speed – torque characteristics, the data is for a double shaft motor when a clean damper is equipped.

● Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C or less.

## ■ Dimensions (Unit: mm)

### ● Motors

Product Name	Gear Ratio	Mass [kg]
<b>PKP243U09A2-SG</b> <input type="checkbox"/>	<b>3.6, 7.2, 9, 10, 18, 36</b>	0.33
<b>PKP243U09B2-SG</b> <input type="checkbox"/>		


● The box ☐ in the product name indicates a number representing the gear ratio.

#### ● Applicable Connectors

Connector Housing: MDF97A-5S-3.5C (HIROSE ELECTRIC CO., LTD.)

Contact: MDF97-22SC (HIROSE ELECTRIC CO., LTD.)

Crimp Tool: HT801/MDF97-22S (HIROSE ELECTRIC CO., LTD.)

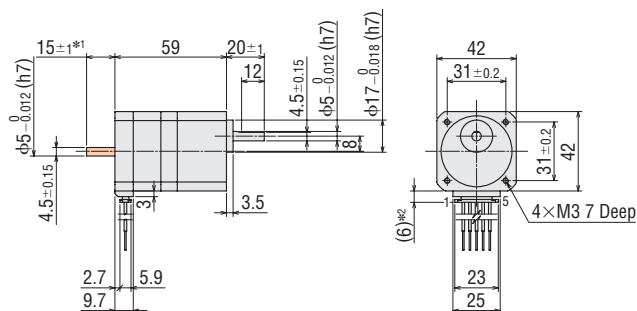

\*1 The length of the shaft flat on the double shaft model is 15 ± 0.25.

\*2 With connection cable


● These dimensions are for double shaft motors.

For single shaft motors, ignore the shaded  areas.

### ● Connection Cables (Sold separately)

#### ◇ Motor Connection Cable

Product Name	Length L [m]
<b>LC2U06E</b>	0.6
<b>LC2U10E</b>	1

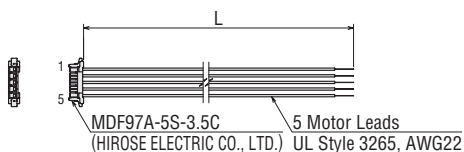

## ■ Inner Wiring Diagram of Motor

Wiring Diagram No.: Model A②

● See "Inner Wiring Diagram of Motor" page for the inner wiring diagram of the motor.

2-Phase  
Motors  
PKP

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

Flat  
Type

SH Geared  
Type

CS Geared  
Type

Common  
Specifications

Inner  
Wiring  
of Motor

5-Phase  
Motors  
PKP

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

TS Geared  
Type

Common  
Specifications

Motor  
Pin  
Arrangement

Drivers for  
2-Phase/5-Phase  
Motors

Cables

Peripheral  
Equipment

Motor  
Frame Size

13 mm

20 mm

28 mm

35 mm

42 mm

50 mm  
51 mm

56.4 mm

60 mm  
61 mm

85 mm  
90 mm

# SH Geared Type

## Frame Size 60 mm (Bipolar 4 lead wires)

### Mini-Connector Type

### Specifications

Product Name	Maximum Holding Torque Nm	Rotor Inertia J: kgm <sup>2</sup>	Rated Current A/Phase	Voltage VDC	Winding Resistance Ω/Phase	Inductance mH/Phase	Basic Step Angle	Gear Ratio	Permissible Torque Nm	Speed Range r/min	Backlash arcmin	Recommended Driver Product Name*
PKP264D14□2-SG3.6	1	140×10 <sup>-7</sup>	1.4	2	1.4	3.1	0.5°	3.6	1	0 – 833	70 (1.17°)	CVD228BR-K
PKP264D28□2-SG3.6			2.8	0.92	0.33	0.81						
PKP264D14□2-SG7.2	2		1.4	2	1.4	3.1	0.25°	7.2	2	0 – 416		
PKP264D28□2-SG7.2			2.8	0.92	0.33	0.81						
PKP264D14□2-SG9	2.5		1.4	2	1.4	3.1	0.2°	9	2.5	0 – 333		
PKP264D28□2-SG9			2.8	0.92	0.33	0.81						
PKP264D14□2-SG10	2.7		1.4	2	1.4	3.1	0.18°	10	2.7	0 – 300		
PKP264D28□2-SG10			2.8	0.92	0.33	0.81						
PKP264D14□2-SG18	3		1.4	2	1.4	3.1	0.1°	18	3	0 – 166		
PKP264D28□2-SG18			2.8	0.92	0.33	0.81						
PKP264D14□2-SG36	4		1.4	2	1.4	3.1	0.05°	36	4	0 – 83		
PKP264D28□2-SG36			2.8	0.92	0.33	0.81						


● The box □ in the product name indicates the shaft **A** (single shaft) or **B** (double shaft).  
 \*See "Drivers for 2-Phase / 5-Phase Motors" page for drivers that can be used in combination.

#### Note


● Be sure to set the driver current at or below the motor rated current. If the motor rated current is exceeded, the product will be damaged.

### Speed – Torque Characteristics (Reference values) fs: Max. Starting Frequency

PKP264D14A2-SG3.6/PKP264D14B2-SG3.6    PKP264D14A2-SG7.2/PKP264D14B2-SG7.2    PKP264D14A2-SG9/PKP264D14B2-SG9

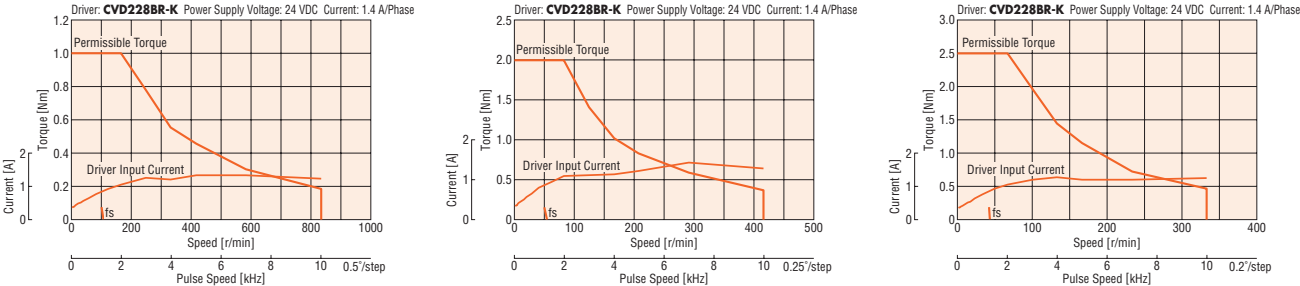

PKP264D14A2-SG10/PKP264D14B2-SG10    PKP264D14A2-SG18/PKP264D14B2-SG18    PKP264D14A2-SG36/PKP264D14B2-SG36



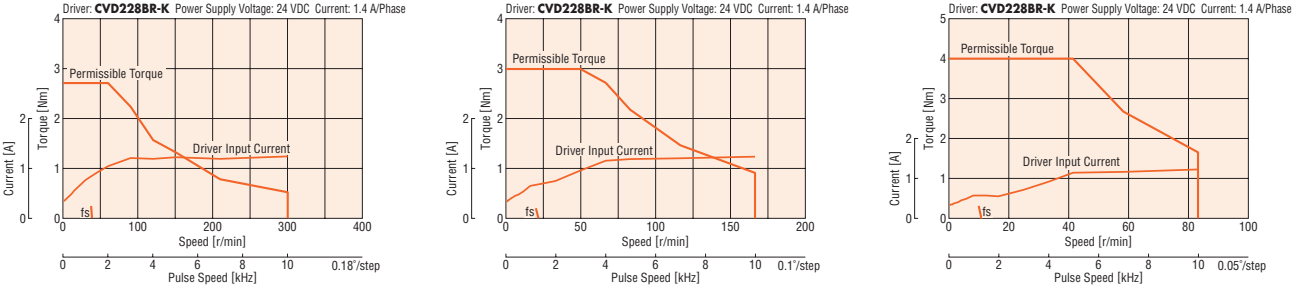


#### Note


- Data for the speed – torque characteristics is based on Oriental Motor's internal measurement conditions. If the conditions are changed, the characteristics may also change as a result.
- Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C or less.
- The characteristics are the same when RS-485 communication type driver is used in combination.

## Speed – Torque Characteristics (Reference values) $f_s$ : Max. Starting Frequency


PKP264D28A2-SG3.6/PKP264D28B2-SG3.6 PKP264D28A2-SG7.2/PKP264D28B2-SG7.2 PKP264D28A2-SG9/PKP264D28B2-SG9

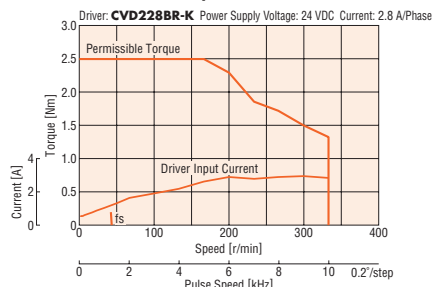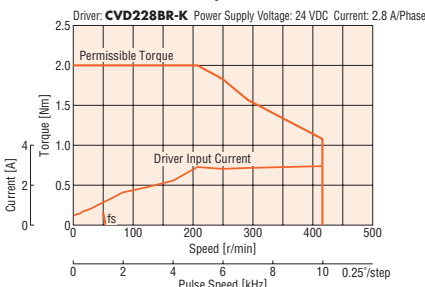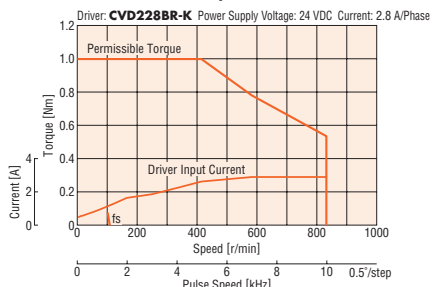


PKP264D28A2-SG10/PKP264D28B2-SG10

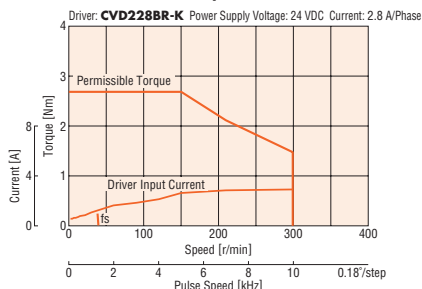

PKP264D28A2-SG18/PKP264D28B2-SG18

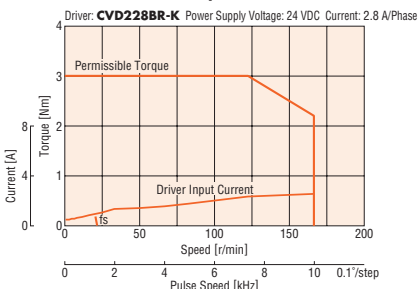

PKP264D28A2-SG36/PKP264D28B2-SG36

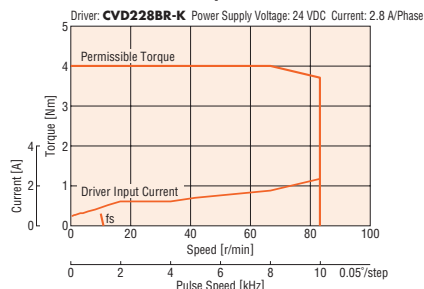

### Note

- Data for the speed – torque characteristics is based on Oriental Motor's internal measurement conditions. If the conditions are changed, the characteristics may also change as a result.
- Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C or less.
- The characteristics are the same when RS-485 communication type driver is used in combination.

## Dimensions (Unit: mm)

### Motors

Product Name	Gear Ratio	Mass [kg]
PKP264D14A2-SG□	3.6, 7.2, 9, 10, 18, 36	0.76
PKP264D14B2-SG□		
PKP264D28A2-SG□		
PKP264D28B2-SG□		


- The box □ in the product name indicates a number representing the gear ratio.

### Applicable Connectors

Connector Housing: MDF97A-5S-3.5C (HIROSE ELECTRIC CO., LTD.)

Contact: MDF97-22SC (HIROSE ELECTRIC CO., LTD.)

Crimp Tool: HT801/MDF97-22S (HIROSE ELECTRIC CO., LTD.)

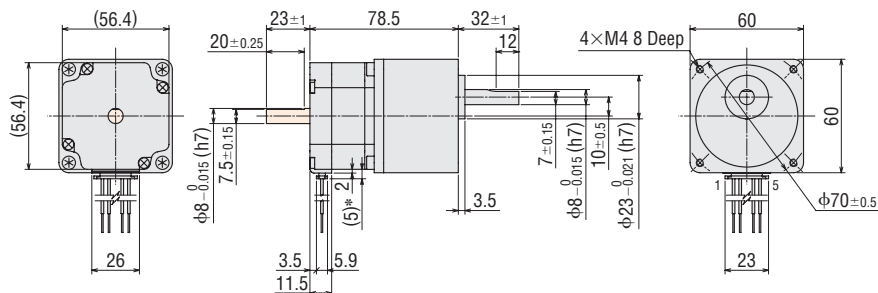

\*With connection cable


- These dimensions are for double shaft motors.

For single shaft motors, ignore the shaded areas.

### Connection Cables (Sold separately)

#### Motor Connection Cable

Product Name	Length L [m]
LC2B06E	0.6
LC2B10E	1

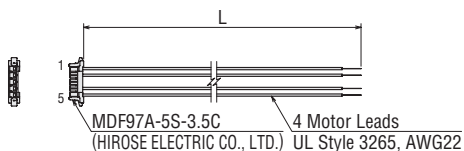

## Inner Wiring Diagram of Motor

Wiring Diagram No.: Model A①

- See "Inner Wiring Diagram of Motor" page for the inner wiring diagram of the motor.

2-Phase  
Motors  
PKP

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

Flat  
Type

SH Geared  
Type

CS Geared  
Type

Common  
Specifications

Inner  
Wiring  
of Motor

5-Phase  
Motors  
PKP

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

TS Geared  
Type

Common  
Specifications

Motor  
Pin  
Arrangement

Drivers for  
2-Phase/5-Phase  
Motors

Cables

Peripheral  
Equipment

- Motor  
Frame Size
- 13 mm
- 20 mm
- 28 mm
- 35 mm
- 42 mm
- 50 mm  
51 mm
- 56.4 mm
- 60 mm  
61 mm
- 85 mm  
90 mm

# SH Geared Type

## Frame Size 60 mm (Unipolar 5 lead wires)

### Mini-Connector Type

### Specifications

Product Name	Maximum Holding Torque Nm	Rotor Inertia J: kgm <sup>2</sup>	Rated Current A/Phase	Voltage VDC	Winding Resistance Ω/Phase	Inductance mH/Phase	Basic Step Angle	Gear Ratio	Permissible Torque Nm	Speed Range r/min	Backlash arcmin	Recommended Driver Product Name*
PKP264U10□2-SG3.6	1	140×10 <sup>-7</sup>	1	2.9	2.9	4.2	0.5°	3.6	1	0 – 833	70 (1.17°)	CMD2120P
PKP264U20□2-SG3.6			2	1.5	0.76	1						
PKP264U10□2-SG7.2	2		1	2.9	2.9	4.2	0.25°	7.2	2	0 – 416		
PKP264U20□2-SG7.2			2	1.5	0.76	1						
PKP264U10□2-SG9	2.5		1	2.9	2.9	4.2	0.2°	9	2.5	0 – 333		
PKP264U20□2-SG9			2	1.5	0.76	1						
PKP264U10□2-SG10	2.7		1	2.9	2.9	4.2	0.18°	10	2.7	0 – 300		
PKP264U20□2-SG10			2	1.5	0.76	1						
PKP264U10□2-SG18	3		1	2.9	2.9	4.2	0.1°	18	3	0 – 166		
PKP264U20□2-SG18			2	1.5	0.76	1						
PKP264U10□2-SG36	4		1	2.9	2.9	4.2	0.05°	36	4	0 – 83		
PKP264U20□2-SG36			2	1.5	0.76	1						

● The box □ in the product name indicates the shaft **A** (single shaft) or **B** (double shaft).




\*See "Drivers for 2-Phase / 5-Phase Motors" page for details on the recommended drivers.

#### Note




● Be sure to set the driver current at or below the motor rated current. If the motor rated current is exceeded, the product will be damaged.

### Speed – Torque Characteristics (Reference values) fs: Max. Starting Frequency

PKP264U10A2-SG3.6/PKP264U10B2-SG3.6    PKP264U10A2-SG7.2/PKP264U10B2-SG7.2    PKP264U10A2-SG9/PKP264U10B2-SG9

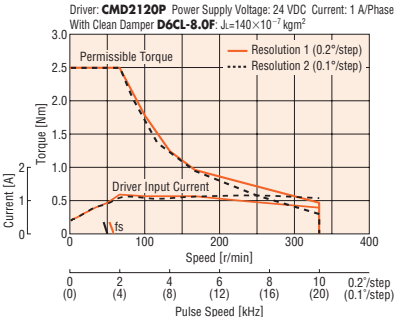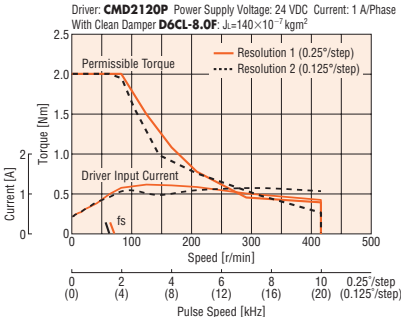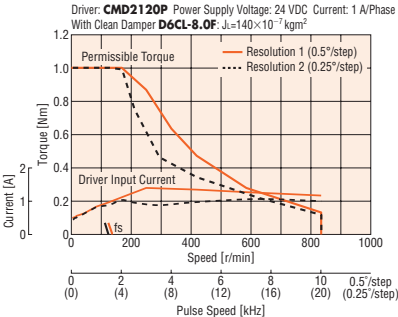

PKP264U10A2-SG10/PKP264U10B2-SG10    PKP264U10A2-SG18/PKP264U10B2-SG18    PKP264U10A2-SG36/PKP264U10B2-SG36

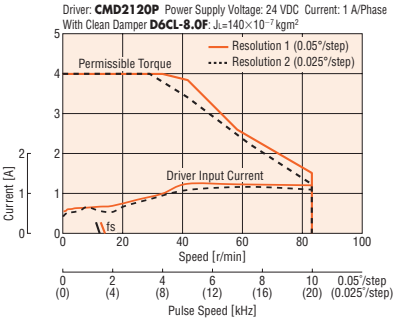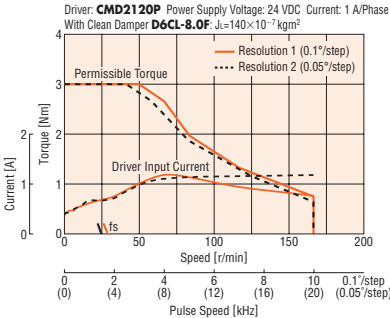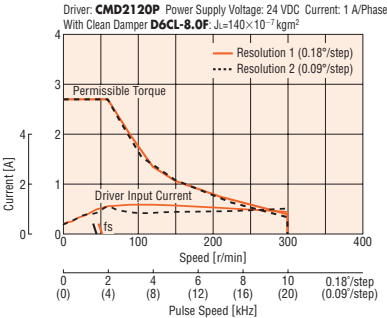

#### Note




● Data for the speed – torque characteristics is based on Oriental Motor's internal measurement conditions. If the conditions are changed, the characteristics may also change as a result.

● If there is a "clean damper" entry in the speed – torque characteristics, the data is for a double shaft motor when a clean damper is equipped.


● Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C or less.

## Speed – Torque Characteristics (Reference values) $f_s$ : Max. Starting Frequency


PKP264U20A2-SG3.6/PKP264U20B2-SG3.6 PKP264U20A2-SG7.2/PKP264U20B2-SG7.2 PKP264U20A2-SG9/PKP264U20B2-SG9

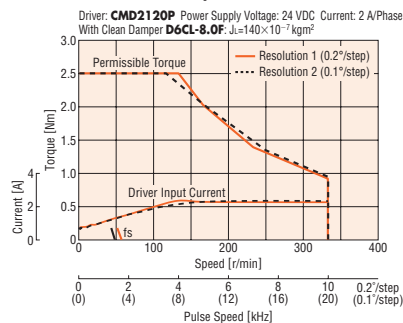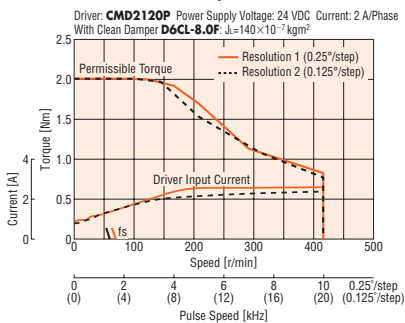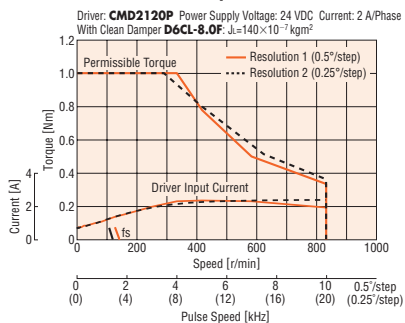


PKP264U20A2-SG10/PKP264U20B2-SG10

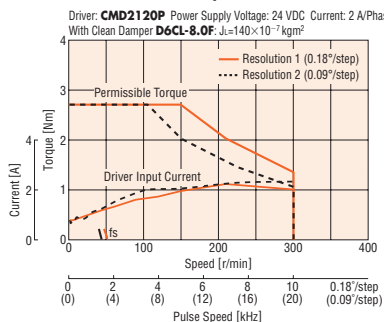

PKP264U20A2-SG18/PKP264U20B2-SG18

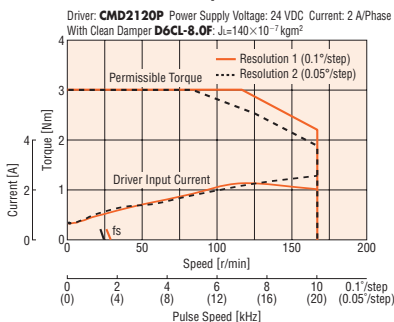

PKP264U20A2-SG36/PKP264U20B2-SG36

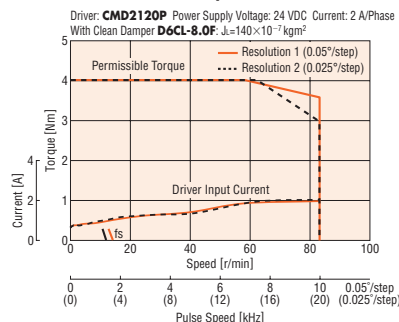

### Note

- Data for the speed – torque characteristics is based on Oriental Motor's internal measurement conditions. If the conditions are changed, the characteristics may also change as a result.
- If there is a "clean damper" entry in the speed – torque characteristics, the data is for a double shaft motor when a clean damper is equipped.
- Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C or less.

## Dimensions (Unit: mm)

### Motors

Product Name	Gear Ratio	Mass [kg]
PKP264U10A2-SG□	3.6, 7.2, 9, 10, 18, 36	0.76
PKP264U10B2-SG□		
PKP264U20A2-SG□		
PKP264U20B2-SG□		


- The box □ in the product name indicates a number representing the gear ratio.

### Applicable Connectors

Connector Housing: MDF97A-5S-3.5C (HIROSE ELECTRIC CO., LTD.)

Contact: MDF97-22SC (HIROSE ELECTRIC CO., LTD.)

Crimp Tool: HT801/MDF97-22S (HIROSE ELECTRIC CO., LTD.)

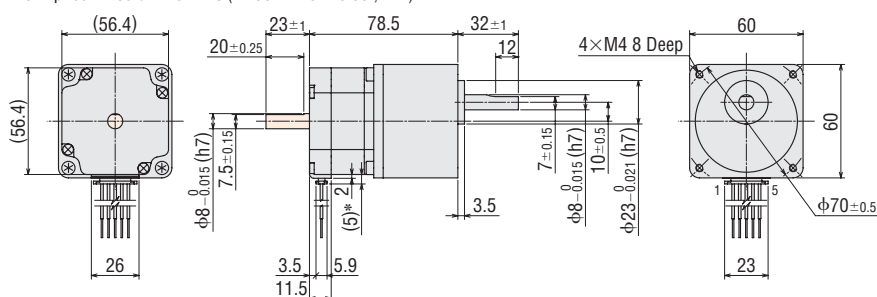

\*With connection cable


- These dimensions are for double shaft motors.

For single shaft motors, ignore the shaded areas.

### Connection Cables (Sold separately)

#### Motor Connection Cable

Product Name	Length L [m]
LC2U06E	0.6
LC2U10E	1

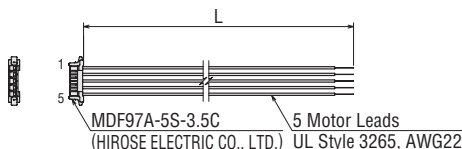

## Inner Wiring Diagram of Motor

Wiring Diagram No.: Model A②

- See "Inner Wiring Diagram of Motor" page for the inner wiring diagram of the motor.

2-Phase  
Motors  
PKP

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

Flat  
Type

SH Geared  
Type

CS Geared  
Type

Common  
Specifications

Inner  
Wiring  
of Motor

5-Phase  
Motors  
PKP

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

TS Geared  
Type

Common  
Specifications

Motor  
Pin  
Arrangement

Drivers for  
2-Phase/5-Phase  
Motors

Cables

Peripheral  
Equipment



- Motor Frame Size
- 13 mm
- 20 mm
- 28 mm
- 35 mm
- 42 mm
- 50 mm
- 51 mm
- 56.4 mm
- 60 mm
- 61 mm
- 85 mm
- 90 mm

# CS Geared Type Frame Size 28 mm (Bipolar 4 lead wires)

## Connector Type


### Specifications

Product Name	Maximum Holding Torque Nm	Rotor Inertia J: kgm <sup>2</sup>	Rated Current A/Phase	Voltage VDC	Winding Resistance Ω/Phase	Inductance mH/Phase	Basic Step Angle	Gear Ratio	Permissible Torque Nm	Speed Range r/min	Backlash arcmin	Recommended Driver Product Name*
PKP223D15□-CS10	0.4	9×10 <sup>-7</sup>	1.5	1.8	1.2	0.74	0.18	10	0.4	0 – 600	90 (1.5°)	CVD215BR-K
PKP223D15□-CS15	0.6						0.12	15	0.6	0 – 400		
PKP223D15□-CS20	0.8						0.09	20	0.8	0 – 300		


- The box □ in the product name indicates the shaft **A** (single shaft) or **B** (double shaft).
- \*See "Drivers for 2-Phase / 5-Phase Motors" page for drivers that can be used in combination.
- Note**
- Be sure to set the driver current at or below the motor rated current. If the motor rated current is exceeded, the product will be damaged.

### Speed – Torque Characteristics (Reference values) fs: Max. Starting Frequency


PKP223D15A-CS10/ PKP223D15B-CS10

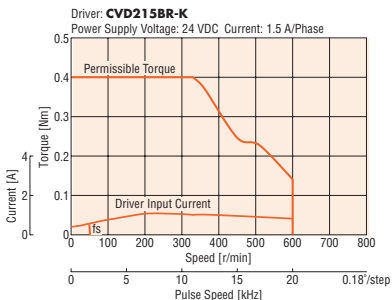

PKP223D15A-CS15/ PKP223D15B-CS15

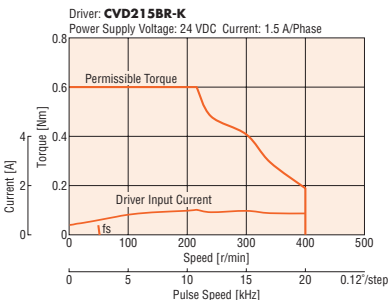

PKP223D15A-CS20/ PKP223D15B-CS20

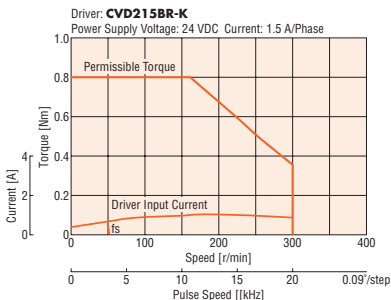


- Note**
- Data for the speed – torque characteristics is based on Oriental Motor's internal measurement conditions. If the conditions are changed, the characteristics may also change as a result.
- Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C or less.
- The characteristics are the same when RS-485 communication type driver is used in combination.

### Dimensions (Unit: mm)

#### Motors

Product Name	Gear Ratio	Mass [kg]
PKP223D15A-CS□	10, 15, 20	0.17
PKP223D15B-CS□		

- The box □ in the product name indicates a number representing the gear ratio.
- Applicable Connectors  
Connector Housing: 51065-0600 (Molex)  
Contact: 50212-8100 (Molex)  
Crimp Tool: 57176-5000 (Molex)

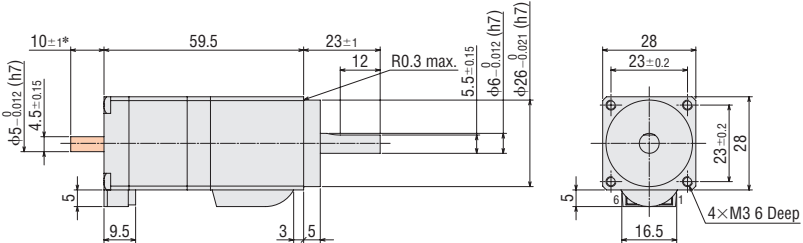


- \*The length of the shaft flat on the double shaft model is 10±0.25.
- These dimensions are for double shaft motors.  
For single shaft motors, ignore the shaded areas.

#### Connection Cables (Sold separately)

##### Motor Connection Cable

Product Name	Length L [m]
LC2B06A	0.6
LC2B10A	1

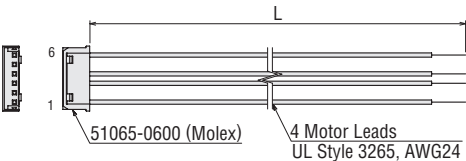

### Inner Wiring Diagram of Motor

- Wiring Diagram No.: Model B③
- See "Inner Wiring Diagram of Motor" page for the inner wiring diagram of the motor.

# CS Geared Type Frame Size 28 mm (Unipolar 6 lead wires)

## Connector Type

## Specifications

Product Name	Maximum Holding Torque Nm	Rotor Inertia J: kgm <sup>2</sup>	Rated Current A/Phase	Voltage VDC	Winding Resistance Ω/Phase	Inductance mH/Phase	Basic Step Angle	Gear Ratio	Permissible Torque Nm	Speed Range r/min	Backlash arcmin	Recommended Driver Product Name*
PKP223U09□-CS10	0.4	9×10 <sup>-7</sup>	0.95	2.66	2.8	1	0.18	10	0.4	0 – 600	90 (1.5°)	CMD2109P
PKP223U09□-CS15	0.6						0.12	15	0.6	0 – 400		
PKP223U09□-CS20	0.8						0.09	20	0.8	0 – 300		

● The box □ in the product name indicates the shaft **A** (single shaft) or **B** (double shaft).


\*See "Drivers for 2-Phase / 5-Phase Motors" page for details on the recommended drivers.

### Note


● Be sure to set the driver current at or below the motor rated current. If the motor rated current is exceeded, the product will be damaged.

## Speed – Torque Characteristics (Reference values) fs: Max. Starting Frequency


### PKP223U09A-CS10/PKP223U09B-CS10

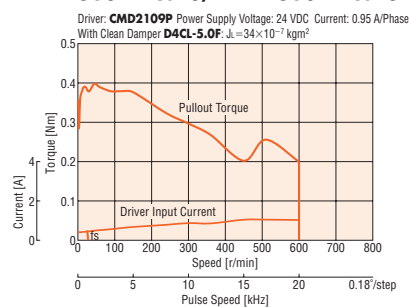

### PKP223U09A-CS15/PKP223U09B-CS15

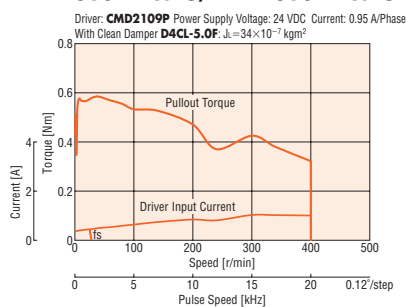

### PKP223U09A-CS20/PKP223U09B-CS20

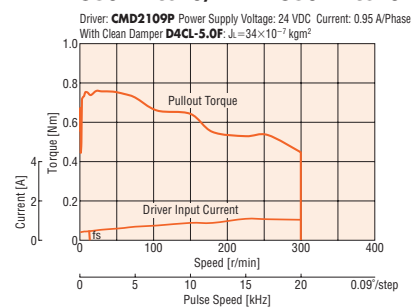

### Note

● Data for the speed – torque characteristics is based on Oriental Motor's internal measurement conditions. If the conditions are changed, the characteristics may also change as a result.

● If there is a "clean damper" entry in the speed – torque characteristics, the data is for a double shaft motor when a clean damper is equipped.

● Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C or less.

## Dimensions (Unit: mm)

### Motors

Product Name	Gear Ratio	Mass [kg]
PKP223U09A-CS□	10, 15, 20	0.17
PKP223U09B-CS□		


● The box □ in the product name indicates a number representing the gear ratio.

● Applicable Connectors

Connector Housing: 51065-0600 (Molex)

Contact: 50212-8100 (Molex)

Crimp Tool: 57176-5000 (Molex)

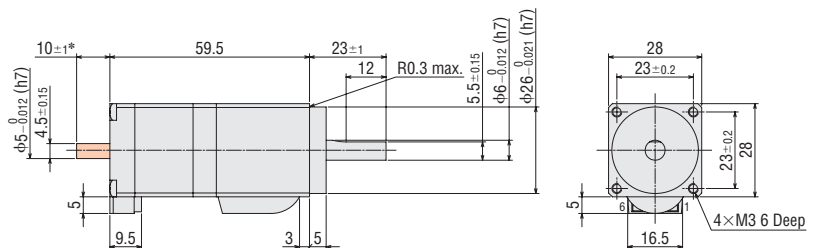

\*The length of the shaft flat on the double shaft model is 10±0.25.


● These dimensions are for double shaft motors.

For single shaft motors, ignore the shaded areas.

### Connection Cables (Sold separately)

#### Motor Connection Cable

Product Name	Length L [m]
LC2U06A	0.6
LC2U10A	1

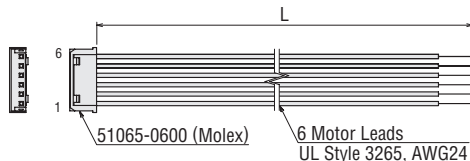

## Inner Wiring Diagram of Motor

Wiring Diagram No.: Model B④

● See "Inner Wiring Diagram of Motor" page for the inner wiring diagram of the motor.

2-Phase  
Motors  
PKP

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

Flat  
Type

SH Geared  
Type

CS Geared  
Type

Common  
Specifications

Inner  
Wiring  
of Motor

5-Phase  
Motors  
PKP

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

TS Geared  
Type

Common  
Specifications

Motor  
Pin  
Arrangement

Drivers for  
2-Phase/5-Phase  
Motors

Cables

Peripheral  
Equipment

- Motor  
Frame Size
- 13 mm
- 20 mm
- 28 mm
- 35 mm
- 42 mm
- 50 mm
- 51 mm
- 56.4 mm
- 60 mm
- 61 mm
- 85 mm
- 90 mm

# CS Geared Type Frame Size 42 mm (Bipolar 4 lead wires)

## Mini-Connector Type

### Specifications

Product Name	Maximum Holding Torque Nm	Rotor Inertia J: kgm <sup>2</sup>	Rated Current A/Phase	Voltage VDC	Winding Resistance Ω/Phase	Inductance mH/Phase	Basic Step Angle	Gear Ratio	Permissible Torque Nm	Speed Range r/min	Recommended Driver Product Name*	
PKP243D15□2-CS5	0.5	37×10 <sup>-7</sup>	1.5	0.83	0.55	0.77	0.36°	5	0.5	0 – 600	CVD223FBR-K	
PKP243D23□2-CS5			2.3	0.87	0.38	0.41						
PKP243D15□2-CS10	1		1.5	0.83	0.55	0.77	0.18°	10	1	0 – 300		
PKP243D23□2-CS10			2.3	0.87	0.38	0.41						
PKP243D15□2-CS15	1.5		1.5	0.83	0.55	0.77	0.12°	15	1.5	0 – 200		
PKP243D23□2-CS15			2.3	0.87	0.38	0.41						
PKP243D15□2-CS20	2		1.5	0.83	0.55	0.77	0.09°	20	2	0 – 150		
PKP243D23□2-CS20			2.3	0.87	0.38	0.41						


- The box □ in the product name indicates the shaft **A** (single shaft) or **B** (double shaft).
- The backlash is 1.5° for the gear ratio 5 and 1° for other gear ratios. (Reference value).
- \*See "Drivers for 2-Phase / 5-Phase Motors" page for drivers that can be used in combination.

#### Note


- Be sure to set the driver current at or below the motor rated current. If the motor rated current is exceeded, the product will be damaged.

### Speed – Torque Characteristics (Reference values) fs: Max. Starting Frequency


PKP243D15A2-CS5/ PKP243D15B2-CS5

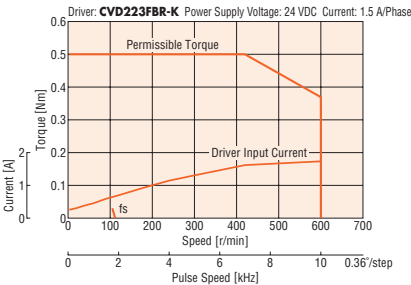


PKP243D15A2-CS10/ PKP243D15B2-CS10

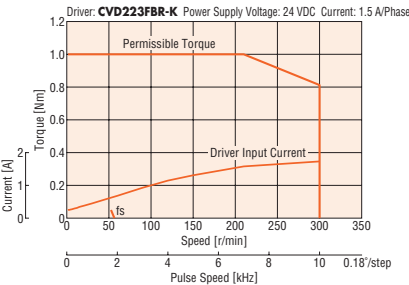


PKP243D15A2-CS15/ PKP243D15B2-CS15

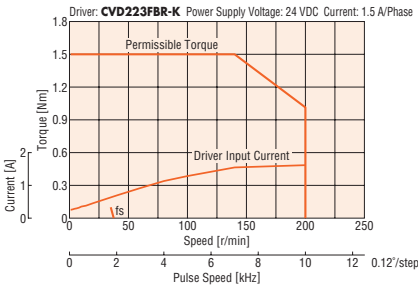


PKP243D15A2-CS20/ PKP243D15B2-CS20

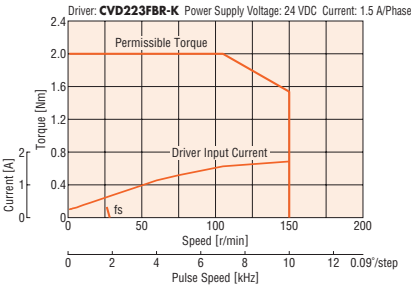


PKP243D23A2-CS5/ PKP243D23B2-CS5

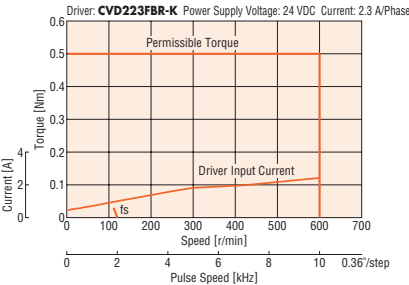


PKP243D23A2-CS10/ PKP243D23B2-CS10

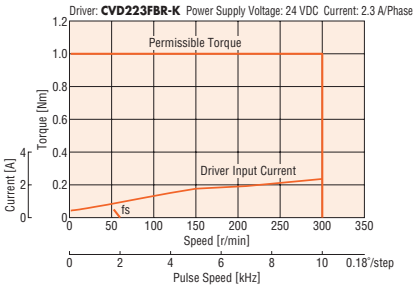

PKP243D23A2-CS15/ PKP243D23B2-CS15

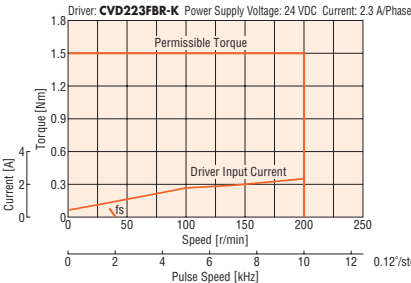

PKP243D23A2-CS20/ PKP243D23B2-CS20

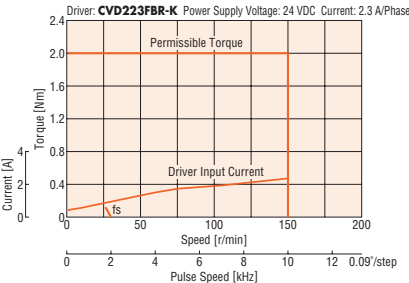

#### Note


- Data for the speed – torque characteristics is based on Oriental Motor's internal measurement conditions. If the conditions are changed, the characteristics may also change as a result.
- Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C or less.
- The characteristics are the same when RS-485 communication type driver is used in combination.

## ■ Dimensions (Unit: mm)

### ● Motors

Product Name	Gear Ratio	Mass [kg]
<b>PKP243D15A2-CS</b> □	<b>5, 10, 15, 20</b>	0.4
<b>PKP243D15B2-CS</b> □		
<b>PKP243D23A2-CS</b> □		
<b>PKP243D23B2-CS</b> □		

- The box □ in the product name indicates a number representing the gear ratio.
- Applicable Connectors  
Connector Housing: MDF97A-5S-3.5C (HIROSE ELECTRIC CO., LTD.)  
Contact: MDF97-22SC (HIROSE ELECTRIC CO., LTD.)  
Crimp Tool: HT801/MDF97-22S (HIROSE ELECTRIC CO., LTD.)

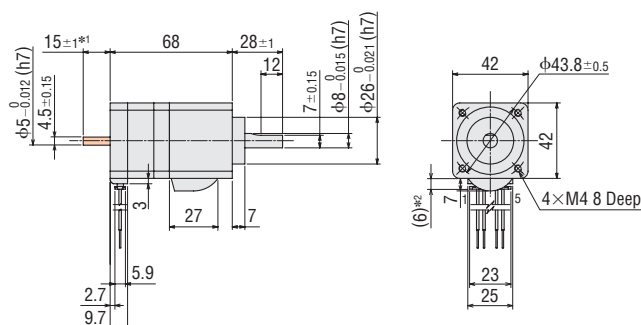

\*1 The length of the shaft flat on the double shaft model is 15 ± 0.25.

\*2 With connection cable


● These dimensions are for double shaft motors.

For single shaft motors, ignore the shaded areas.

### ● Connection Cables (Sold separately)

#### ◇ Motor Connection Cable

Product Name	Length L [m]
<b>LC2B06E</b>	0.6
<b>LC2B10E</b>	1

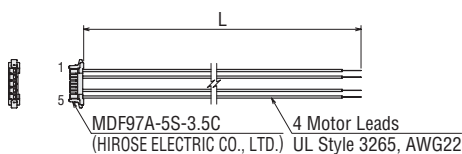

## ■ Inner Wiring Diagram of Motor

Wiring Diagram No.: Model A①

- See "Inner Wiring Diagram of Motor" page for the inner wiring diagram of the motor.

### 2-Phase Motors PKP

#### Features Product Line

#### Product Number Product Line

#### Standard Type

#### High-Resolution Type

#### Flat Type

#### SH Geared Type

#### CS Geared Type

#### Common Specifications

#### Inner Wiring of Motor

### 5-Phase Motors PKP

#### Features Product Line

#### Product Number Product Line

#### Standard Type

#### High-Resolution Type

#### TS Geared Type

#### Common Specifications

#### Motor Pin Arrangement

#### Drivers for 2-Phase/5-Phase Motors

#### Cables

#### Peripheral Equipment

- Motor  
Frame Size
- 13 mm
- 20 mm
- 28 mm
- 35 mm
- 42 mm
- 50 mm
- 51 mm
- 56.4 mm
- 60 mm
- 61 mm
- 85 mm
- 90 mm

# CS Geared Type

## Frame Size 60 mm (Bipolar 4 lead wires)

### Mini-Connector Type


### Specifications

Product Name	Maximum Holding Torque Nm	Rotor Inertia J: kgm <sup>2</sup>	Rated Current A/Phase	Voltage VDC	Winding Resistance Ω/Phase	Inductance mH/Phase	Basic Step Angle	Gear Ratio	Permissible Torque Nm	Speed Range r/min	Backlash arcmin	Recommended Driver Product Name*		
PKP264D14□2-CS5	1.3	140×10 <sup>-7</sup>	1.4	2	1.4	3.1	0.36	5	1.3	0 — 600	70 (1.17°)	CVD228BR-K		
PKP264D28□2-CS5			2.8	0.92	0.33	0.81								
PKP264D14□2-CS10	2.7		1.4	2	1.4	3.1	0.18	10	2.7	0 — 300				
PKP264D28□2-CS10			2.8	0.92	0.33	0.81								
PKP264D14□2-CS15	4		1.4	2	1.4	3.1	0.12	15	4	0 — 200				
PKP264D28□2-CS15			2.8	0.92	0.33	0.81								
PKP264D14□2-CS20	4.5		1.4	2	1.4	3.1	0.09	20	4.5	0 — 150				
PKP264D28□2-CS20			2.8	0.92	0.33	0.81								


- The box □ in the product name indicates the shaft **A** (single shaft) or **B** (double shaft).
- \*See "Drivers for 2-Phase / 5-Phase Motors" page for drivers that can be used in combination.
- Note**
- Be sure to set the driver current at or below the motor rated current. If the motor rated current is exceeded, the product will be damaged.

### Speed – Torque Characteristics (Reference values) fs: Max. Starting Frequency


PKP264D14A2-CS5/ PKP264D14B2-CS5

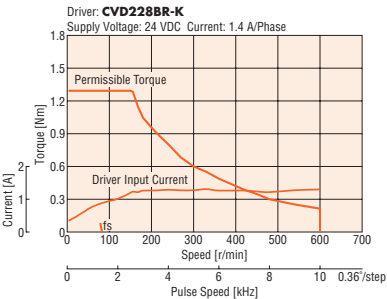


PKP264D14A2-CS10/ PKP264D14B2-CS10

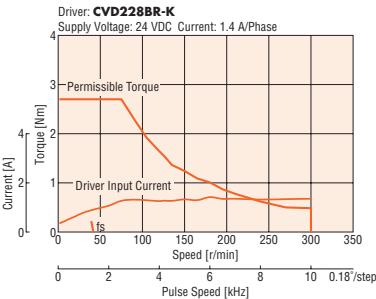


PKP264D14A2-CS15/ PKP264D14B2-CS15

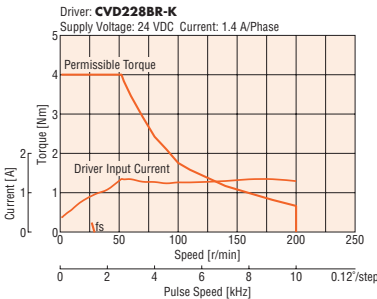


PKP264D14A2-CS20/ PKP264D14B2-CS20

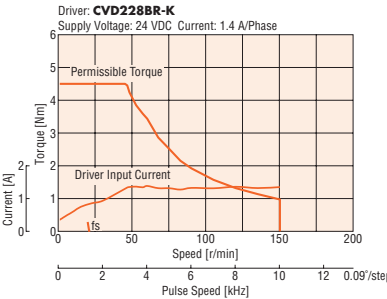


PKP264D28A2-CS5/ PKP264D28B2-CS5

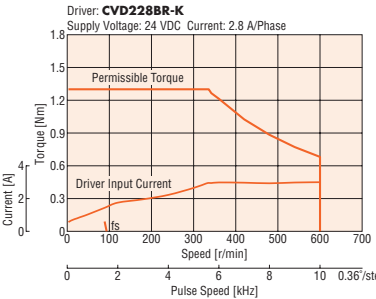


PKP264D28A2-CS10/ PKP264D28B2-CS10

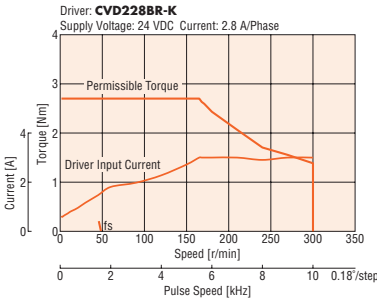

PKP264D28A2-CS15/ PKP264D28B2-CS15

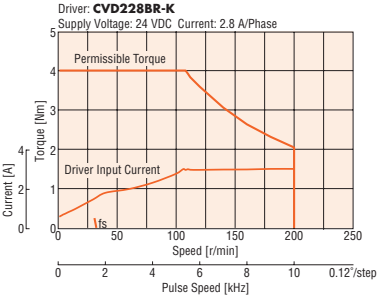


PKP264D28A2-CS20/ PKP264D28B2-CS20

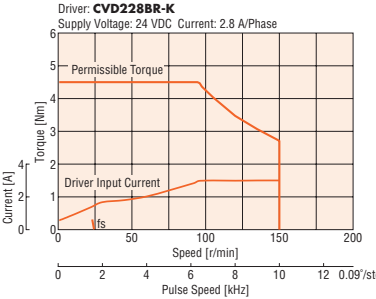

- Note**
- Data for the speed – torque characteristics is based on Oriental Motor's internal measurement conditions. If the conditions are changed, the characteristics may also change as a result.
- Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C or less.
- The characteristics are the same when RS-485 communication type driver is used in combination.

 Mazda

- The box ☐ in the product name indicates a number representing the gear ratio.
- Applicable Connectors  
Connector Housing: MDF97A-5S-3.5C (HIROSE ELECTRIC CO., LTD.)  
Contact: MDF97-22SC (HIROSE ELECTRIC CO., LTD.)  
Crimp Tool: HT801/MDF97-22S (HIROSE ELECTRIC CO., LTD.)



◇ Motor Connection Cable

The diagram illustrates the cable assembly with the following details:

- Length:** L
- Motor Leads:** 4 Motor Leads
- Cable Type:** MDF97A-5S-3.5C
- Manufacturer:** (HIROSE ELECTRIC CO., LTD.)
- UL Style:** UL Style 3265, AWG22
- Dimensions:** 1 and 5 are indicated as dimensions on the left side of the cable.

Wiring Diagram No.: Model A①

● See "Inner Wiring Diagram of Motor" page for the inner wiring diagram of the motor.

## Common Specifications

### General Specifications

Specifications		Motor
Thermal Class		130 (B)
Insulation Resistance		The measured value is 100 MΩ min. when a 500 VDC megger is applied between the windings and the case under normal ambient temperature and humidity.
Dielectric Strength		No abnormalities are observed, even when applying voltage between the windings and the case for 1 minute under normal ambient temperature and humidity with the following conditions. · Frame size 42 mm max., <b>PKP262</b> : 0.5 kVAC 50/60 Hz · Frame size 56.4 mm or more: 1.0 kVAC 50/60 Hz · <b>PKP29</b> : 1.5 kVAC 50/60 Hz
Operating Environment (In operation)	Ambient Temperature	−10 to +50°C (Non-freezing) [0 to +40°C for Flat Type with Harmonic Gear]
	Ambient Humidity	85% or less (Non-Condensing)
	Atmosphere	No corrosive gases or dust. The product should not be exposed to water, oil or other liquids.
Temperature Rise		Winding temperature rise 80°C max. (Based on Oriental Motor's internal measurement conditions)
Stop Position Accuracy*1		± 3 arcmin (±0.05°) [ <b>PKP21</b> , <b>PKP242</b> and <b>PKP262</b> are ± 5 arcmin (±0.083°), <b>PK26</b> and <b>PK26JD</b> are ± 2 arcmin (±0.034°)]
Shaft Runout		0.05T.I.R. (mm)*4
Radial Play*2		0.025 mm Max. (Load 5 N)
Axial Play*3		0.075 mm Max. (10 N load) [ <b>PKP21</b> is 1 N load, <b>PKP22</b> , <b>PKP242</b> and <b>PKP262</b> are 2.5 N load]
Concentricity of Installation Pilot to the Shaft		0.075T.I.R. (mm)*4
Perpendicularity of Installation Surface to the Shaft		0.075T.I.R. (mm)*4

\*1 This value is for a full step under no load. (The value changes with the size of the load.)


\*2 Radial Play: Displacement in shaft position in the radial direction when a 5 N load is applied perpendicular to the tip of the motor shaft.

\*3 Axial Play: Displacement in shaft position in the axial direction when a 10 N (**PKP21**) and 1 N (**PKP22**, **PKP242** and **PKP262**) are 2.5 N).

\*4 T. I. R. (Total Indicator Reading): The total dial gauge reading when the measurement section is rotated once around the reference axis center.

#### Note

- Separate the motor and driver when measuring insulation resistance or performing a dielectric voltage withstand test. Also, do not conduct these tests on the motor encoder section.



### Electromagnetic Brake Specifications

Product Name		PKP22	PKP23-PKP24	PKP26	PKP26M2
Type		Power Off Activated Type			
Power Supply Voltage		24 VDC ± 5%			
Power Supply Current	A	0.05	0.07	0.23	0.18
Static Friction Torque	Nm	0.08	0.3	1.5	0.8
Brake Activation Time	ms	20*			
Brake Release Time	ms	50*			
Time Rating		Continuous			

\*The value is when the included surge suppressor (varistor) is used. [Recommended varistor: Z15D121 (Manufactured by SEMITEC)]

### Encoder Specifications

Encoder Product Name	R3E	R3F	R3J	R3EL	R3FL	R3JL
Resolution (P/R)	200	400	1000	200	400	1000
Angular Accuracy	±0.36° (Motor output shaft conversion value)					
Output Circuit Type	Voltage Output			Line Driver Output*		
Output Type	Incremental					
Output Signals	A phase, B phase, Z phase (3 ch)					
Power Supply Voltage	5 VDC ±10%					
Current	45 mA max.			30 mA max.		

\*26C31 or Equivalent




## Permissible Radial Load and Permissible Axial Load

Unit: N

Type	Motor Frame Size	Product Name	Gear Ratio	Permissible Radial Load					Permissible Axial Load
				Distance from Shaft End [mm]					
				0	5	10	15	20	
Standard Type	13 mm	PKP203	—	5	6	—	—	—	1
	20 mm	PKP213, PKP214		12	15	—	—	—	3
	28 mm	PKP223, PKP225		25	34	52	—	—	5
	35 mm	PKP233, PKP235		20	25	34	52	—	10
	42 mm	PKP243, PKP244, PKP245, PKP246		20	25	34	52	—	10
		PKP243□2, PKP244□2, PKP245□2, PKP246□2		35	44	58	85	—	15
				61	73	90	110	—	20
	56.4 mm	PKP264, PKP266, PKP268		61	73	90	110	160	20
		PKP264□2, PKP266□2, PKP268□2		90	100	130	180	270	30
	60 mm	PK264J, PK266J, PK267J, PK269J		50	60	75	100	150	20
	85 mm	PKP296, PKP299, PKP2913		260	290	340	390	480	60
High-Resolution Type	28 mm	PKP223, PKP225	—	25	34	52	—	—	5
	42 mm	PKP243, PKP244		20	25	34	52	—	10
		PKP243□2, PKP244□2 PKP245□2, PKP246□2		35	44	58	85	—	15
				61	73	90	110	160	20
	56.4 mm	PKP264, PKP266, PKP268		90	100	130	180	270	30
		PKP264□2, PKP266□2, PKP268□2							
Flat Type · Standard	42 mm	PKP242	—	20	25	34	—	—	5
	60 mm	PKP262							
Flat Type with Harmonic Gear	51 mm	PKP242	50, 100	—	—	—	—	—	200
	61 mm	PKP262							450
SH Geared Type	28 mm	PKP223	7.2, 9, 10, 18, 36	15	17	20	23	—	10
	42 mm	PKP243	3.6, 7.2, 9, 10, 18, 36	10	15	20	30	—	15
	60 mm	PKP264	3.6, 7.2, 9, 10	30	40	50	60	70	30
			18, 36	80	100	120	140	160	
CS Geared Type	28 mm	PKP223	10, 15, 20	30	37	50	73	—	30
	42 mm	PKP243	5, 10, 15, 20	59	68	80	96	—	40
	60 mm	PKP264		160	170	200	220	260	70

### Radial Load and Axial Load

Distance from Shaft End [mm]



### Permissible Moment Load of Flat Type with Harmonic Gear


When an eccentric load is applied to the output flange-installation surface, the load moment acts on the bearing.

Use the following formula to check whether the axial load and load moment are within specifications.


Product Name	Gear Ratio	Permissible Axial Load [N]	Permissible Moment Load [Nm]	Constant a [m]
PKP242-H□	50, 100	200	8.5	0.0129
PKP262-H□S	50, 100	450	10.1	0.0140

m: Load mass [kg]	ΔF: Load on output flange surface [N]
g: Gravitational acceleration [m/s <sup>2</sup> ]	F <sub>s</sub> : Permissible axial load [N]
F: External force [N]	
L: Overhung distance [m]	ΔM: Load moment [Nm]
a: Constant [m]	M: Permissible moment load [Nm]

Example 1: An external force F [N] is applied at L [m] overhang position in a horizontal direction from the center of the output flange

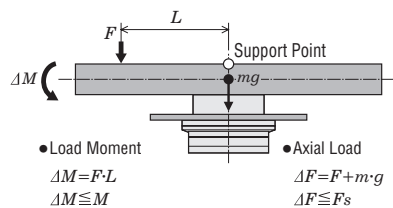

Example 2: An external force F [N] is applied at L [m] overhang position in a vertical direction from the output flange-installation surface



2-Phase Motors PKP

Features Product Line

Product Number Product Line

Standard Type

High-Resolution Type

Flat Type

SH Geared Type

CS Geared Type

Common Specifications

Inner Wiring of Motor

5-Phase Motors PKP

Features Product Line

Product Number Product Line

Standard Type

High-Resolution Type

TS Geared Type

Common Specifications

Motor Pin Arrangement


Drivers for 2-Phase/5-Phase Motors

Cables

Peripheral Equipment

## Details of the Flat Type with Harmonic Gear

### Principle and Structure



### Details of the Accuracy

Unlike the conventional spur gear gearhead, the harmonic gear has no backlash. The harmonic gear has many teeth in simultaneous meshing engagement, and is designed to average out the effects of tooth pitch error and cumulative pitch error on rotation accuracy to ensure high positioning accuracy. Also, harmonic gears have high gear ratio, so that the torsion when the load torque is applied to the output shaft is much smaller than a single motor and other geared motor, and the rigidity is high. High rigidity is less subject to load fluctuation and enables stable positioning. When the high positioning accuracy and rigidity are required, refer to the following characteristics.

### Angular Transmission Accuracy

Angular transmission error is the difference between the theoretical rotation angle of the output shaft, as calculated from the input pulse count, and actual rotation angle. Represented as the difference between the min. value and max. value in the set of measurements taken for a single rotation of the output shaft starting from an arbitrary position.

Product Name	Angular Transmission Accuracy [arcmin]
<b>PKP242-H</b>	2 (0.034°)
<b>PKP262-H</b>	1.5 (0.025°)

● Values in no-load condition (reference of gear part)

### Torque – Torsion Characteristics

In actual applications, there is always frictional load, and displacement is produced as a result of this load. If the frictional load is constant, the displacement will be constant for unidirectional operation. However, in bidirectional operation, double the displacement is produced over a round trip. This displacement can be estimated from the following torque – torsion characteristics.

This displacement occurs when an external force is applied as the gear is stopped, or when the gear is driven under a frictional load. The slope can be approximated with the spring constant in the following 3 classes, depending on the size of the load torque, and can be estimated through calculation.

1. Load torque  $T_L$  is  $T_1$  max.

$$\theta = \frac{T_L}{K_1} \text{ [min]}$$


2. Load torque  $T_L$  exceeds  $T_1$  and is  $T_2$  max.

$$\theta = \theta_1 + \frac{T_L - T_1}{K_2} \text{ [min]}$$

3. Load torque  $T_L$  exceeds  $T_2$

$$\theta = \theta_2 + \frac{T_L - T_2}{K_3} \text{ [min]}$$

The torsion angle of the harmonic gear alone is calculated according to the size of the load torque.

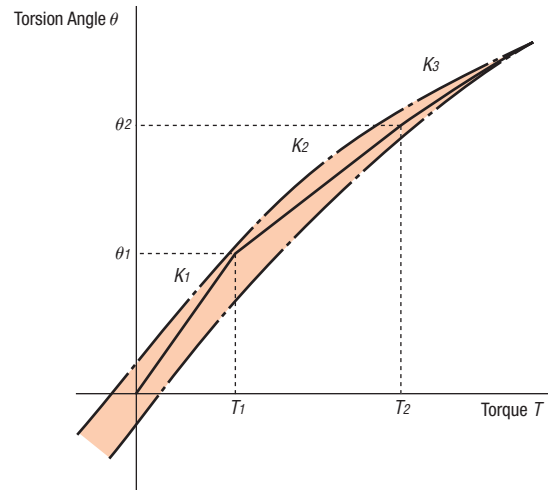











Torsion Angle – Torque Characteristics

### Values for Determining Torsion Angle

Product Name	Item	Gear Ratio	$T_1$ Nm	$K_1$ Nm/min	$\theta_1$ min	$T_2$ Nm	$K_2$ Nm/min	$\theta_2$ min	$K_3$ Nm/min
<b>PKP242-H50</b>		50	0.29	0.13	2.3	0.75	0.19	4.5	0.24
<b>PKP242-H100</b>		100	0.29	0.26	1.1	0.75	0.29	2.8	0.35
<b>PKP262-H50S</b>		50	0.8	0.64	1.2	2	0.87	2.8	0.93
<b>PKP262-H100S</b>		100	0.8	0.79	1	2	0.99	2.1	1.28

## Motor Inner Wiring Diagram and Rotation Direction

### Inner Wiring Diagram

Motor Model Type	Connection Diagram/Pin Arrangement		
Model A Mini-Connector Type	① Bipolar (4 Lead Wires) 	② Unipolar (5 Lead Wires) 	· Pin Arrangement 
	● The colors in the wiring diagram are the colors of the separately sold connection cables.		
Model B Connector Type	③ Bipolar (4 Lead Wires) 	④ Unipolar (6 Lead Wires) 	· Pin Arrangement 
	● The colors in the wiring diagram are the colors of the separately sold connection cables.		
Model C Lead Wire Type	⑤ Bipolar (4 Lead Wires) 	⑥ Unipolar (5 Lead Wires) 	⑦ Unipolar (6 Lead Wires) 
	· Pin Arrangement  Motor lead wire colors: Blue, white, red, black, yellow, green		

### Rotation Direction

When excited in the order shown below, it rotates in a clockwise direction viewed from the output shaft direction.

#### ●Bipolar

STEP	Black	Green	Red	Blue
1	—	+	+	—
2	—	+	—	+
3	+	—	—	+
4	+	—	+	—

#### ●Unipolar

STEP	A	$\bar{A}$	B	$\bar{B}$
1	ON		ON	
2		ON	ON	
3		ON		ON
4	ON			ON


### ●Geared Motor Rotation Direction

The rotation direction of the output gear shaft relative to the standard type motor output shaft varies depending on the gear type and gear ratio.

Please check the following table.

Geared Type		Gear Ratio	Rotation Direction when Viewed from the Output Shaft Side of the Motor
SH Geared Type	Frame Size 28 mm	7.2, 36	Same Direction
		9, 10, 18	Opposite Direction
	Frame Size 42 mm, 60 mm	3.6, 7.2, 9, 10	Same Direction
		18, 36	Opposite Direction
CS Geared Type		5, 10, 15, 20	Same Direction
Flat Type with Harmonic Gears		50, 100	Opposite Direction

### ●Standard Type Motor



2-Phase Motors PKP

Features Product Line

Product Number Product Line

Standard Type

High-Resolution Type

Flat Type

SH Geared Type

CS Geared Type

Common Specifications

Inner Wiring of Motor

5-Phase Motors PKP

Features Product Line

Product Number Product Line

Standard Type

High-Resolution Type

TS Geared Type

Common Specifications

Motor Pin Arrangement

Drivers for 2-Phase/5-Phase Motors

Cables

Peripheral Equipment

# 5-Phase Stepper Motors PKP Series




This is a high torque and low vibration stepper motor with a basic step angle of  $0.72^\circ$  (resolution of 500 steps per revolution). High Positioning accuracy is possible, as well as low vibration and reduced noise. (A separate dedicated driver is required to operate each motor.)

## Features


### High Accuracy

Since the step angle of 5-Phase Stepper Motors in the **PKP** Series is at  $0.72^\circ$  (high-resolution type at  $0.36^\circ$ ) and the stopping accuracy is at  $\pm 0.05^\circ$ , highly accurate positioning is possible. In addition, the stop position accuracy controlled by a microstep driver has almost the same high accuracy as that controlled by a full-step driver.

#### General 2-Phase Motor

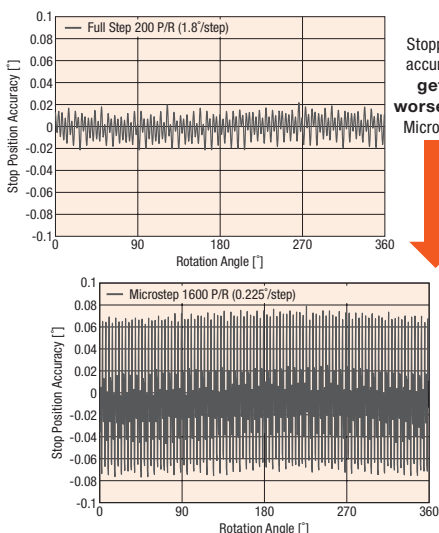

#### 5-Phase **PKP** Series (Driver: 5-phase **CVD** driver)

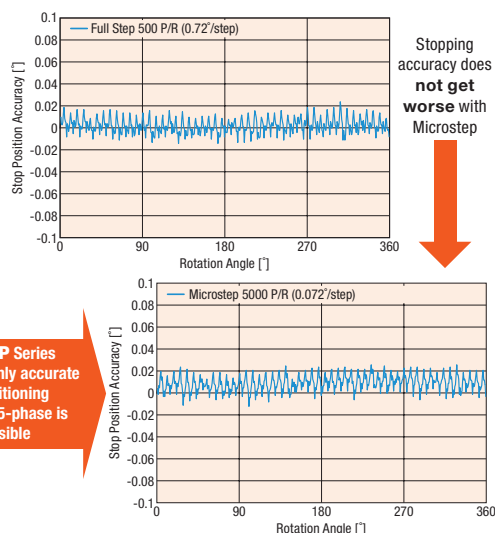


**PKP Series**  
Highly accurate  
positioning  
for 5-phase is  
possible

### Low Vibration and Reduced Noise


Because the basic step angle is small at  $0.72^\circ$  ( $0.36^\circ$  for high-resolution type), the vibrations and noise are lower than the 2-phase stepper motor with a basic step angle of  $1.8^\circ$ . Also, vibrations and noise can be further reduced with the driver of the microstep drive.

#### Example of 2-Phase Stepper Motor Vibration Characteristics

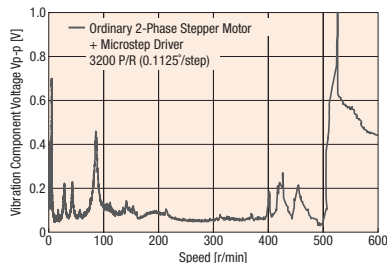

**PKP Series**  
Vibration  
characteristics  
for 5-phase are  
further improved


#### Example of 5-Phase Stepper Motor Vibration Characteristics

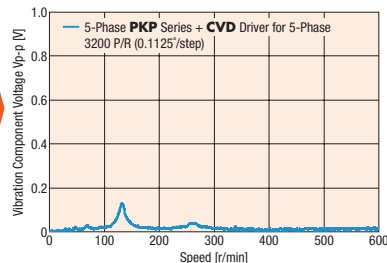

### Lineup of Products Using Compact, Flat Connectors



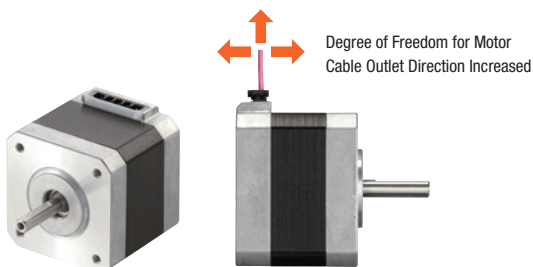
















The product line offers products that use compact, flat connectors. The degree of freedom for the motor cable outlet direction has been increased, because the outlet direction points upward.

The connector configuration depends on the motor. Check the details in the motor dimensions.



## Product Line

—: Not Offered in This Product Line

Type (Basic Step Angle)	Features	Frame Size					
		20 mm	28 mm	42 mm	56.4 mm	60 mm	85 mm
Standard Type (0.72°)	<ul style="list-style-type: none"> <li>Standard model</li> <li>High torque, low vibration</li> </ul>	 *1					 *1 Lead Wire Type
High-Resolution Type (0.36°)	<ul style="list-style-type: none"> <li>Resolution double that of standard type</li> <li>Results in high positioning accuracy and reduced vibration</li> </ul>	—			—		—
Standard Type with Encoder (0.72°)	<ul style="list-style-type: none"> <li>Encoder resolution 500 P/R, A, B, Z (3 ch) signal output</li> <li>Uses compact encoder</li> <li>Angular Accuracy <math>\pm 0.36^\circ</math>*3</li> <li>Capable of Highly Repeatable Return-to-Home</li> </ul>	 *1		 *2		 *2	—
High-Resolution Type with Encoder (0.36°)	<ul style="list-style-type: none"> <li>Encoder resolution 1000 P/R, A, B, Z (3 ch) signal output</li> <li>Uses compact encoder</li> <li>Angular Accuracy <math>\pm 0.36^\circ</math>*3</li> <li>Capable of Highly Repeatable Return-to-Home</li> </ul>	—			—		—
<b>TS</b> Geared Type (0.024° - 0.2°)	<ul style="list-style-type: none"> <li>Spur gear mechanism</li> <li>A wide variety of low gear ratios, high-speed operations</li> <li>Gear ratio types: 3.6, 7.2, 10, 20, 30</li> </ul>	—	—		—		—

\*1 This is the conventional **PK** Series.

\*2 With frame sizes of 42 mm and 60 mm, a product line with resolution of 1000 P/R is also available.

\*3 Motor output shaft conversion value

### 2-Phase Motors PKP

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

Flat  
Type

**SH** Geared  
Type

**CS** Geared  
Type

Common  
Specifications

Inner  
Wiring  
of Motor

### 5-Phase Motors PKP

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

**TS** Geared  
Type

Common  
Specifications

Motor  
Pin  
Arrangement

Drivers for  
2-Phase/5-Phase  
Motors

Cables

Peripheral  
Equipment

## Product Line Equipped with Additional Functions to Broaden Applications

### ● With Encoder

(Provided for standard type and high-resolution type)


#### ◇ Main Specifications

Type	Standard Type	High-Resolution Type
Resolution	500 P/R*	1000 P/R
Angular Accuracy	$\pm 0.36^\circ$ (Motor output shaft conversion value)	
Output Signals	A phase, B phase, Z phase (3 ch)	

\*A product line with resolution of 1000 P/R is available with frame sizes of 42 mm and 60 mm.

#### ● About Angular Accuracy (Diagram)

Angular accuracy is the error between the actual rotation angle and the angle output by the encoder.

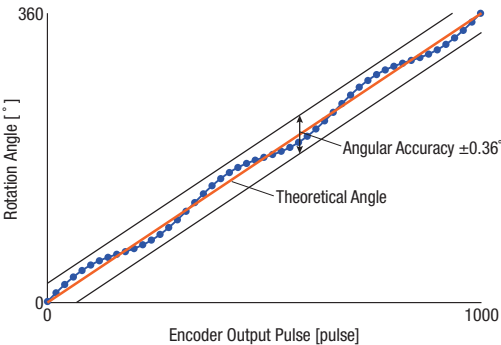


#### ◇ Capable of Highly Repeatable Return-to-Home

The Z-phase signal is output using the excitation home (stable point), so the home sensor (the sensor that detects the home within one rotation, installed on the motor shaft) can be used instead.

It is also easier for the Z-phase output signal and TIM output signal\* to be used together, increasing the repeatability of return-to-home.


\*The signal output by the driver every time the motor output shaft rotates  $7.2^\circ$  ( $3.6^\circ$  for high-resolution type) from home.

#### ● If the Z-Phase Output Timing is Fixed New Encoder (Magnetic Type)

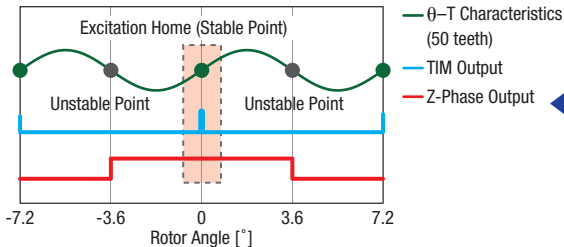

The Z-phase signal outputs with a width of  $\pm 3.6^\circ$ , centered on the excitation home (stable point).


#### ● If the Z-Phase Output Timing is not Fixed

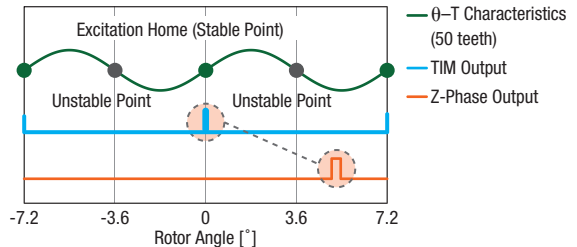

The Z-phase signal output timing is unstable, making it difficult to use it as a home sensor substitute, and also making it difficult to use it in combination with the TIM signal.

#### ◇ Equipped with a Compact Encoder

● When frame size is 56.4 mm




#### ◇ Motor Position Detection is Possible

Monitoring the current position and detecting positional errors is possible.

For example, comparing the command position and current position enables you to ensure normal operation of the motor.

#### ● System Configuration Example

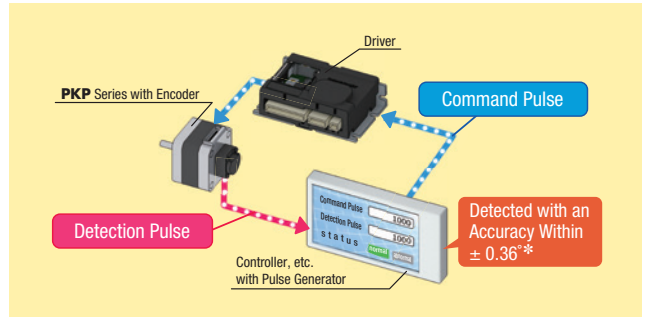

\*Motor output shaft conversion value


#### ◇ Voltage Output Type and Line Driver Output Type Available

Both a voltage output type and a line driver output type are available.

# System Configuration

## Combination of the 5-Phase Stepper Motor PKP Series and the CVD Series Pulse Input Type Driver

An example of a system configuration using a host control device (with built-in pulse generator function) is shown below. Motors, drivers, and connection cables must be ordered individually.

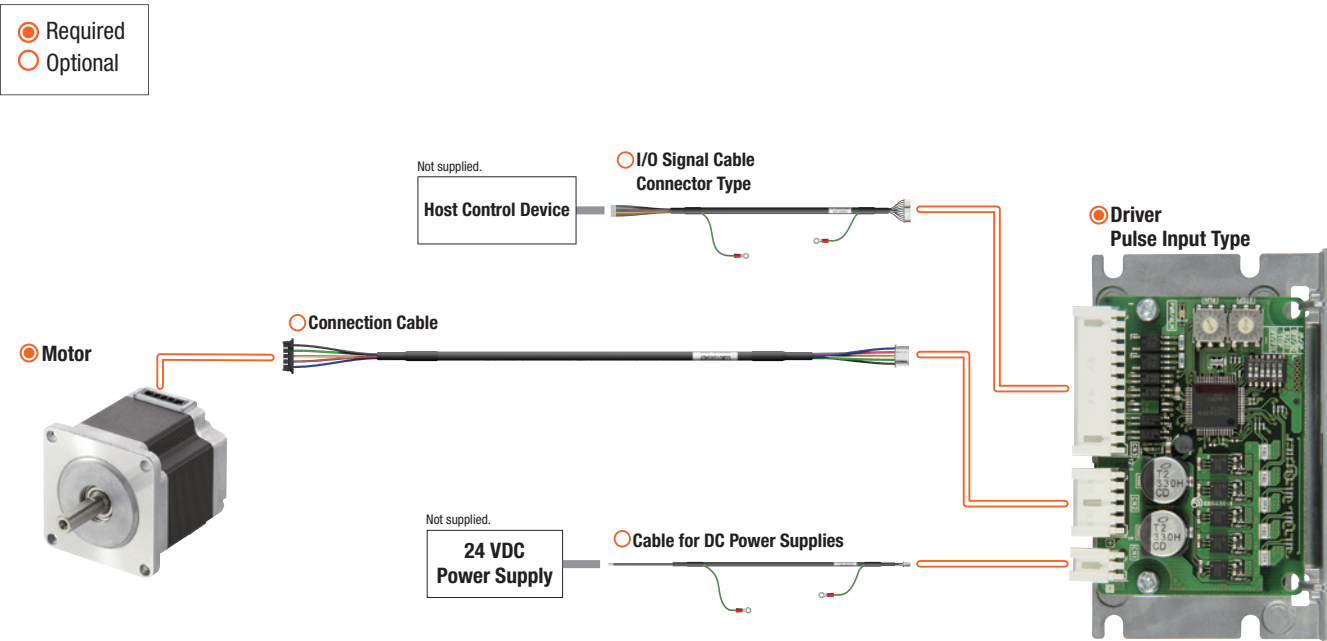

### Example of System Configuration

Motor	+	Driver	+	Cables		
				Connection Cable (1 m)	Cable for I/O Signal (1 m)	Cable for DC Power Supplies (1 m)
PKP566FN24B2		CVD524BR-K		CCM010V5AEF	CC12D010-2	CC02D010-2

The system configuration shown above is an example. Other combinations are also available.

2-Phase Motors PKP	Features Product Line
Product Number Product Line	Standard Type
High-Resolution Type	Flat Type
SH Geared Type	CS Geared Type
Common Specifications	Inner Wiring of Motor
5-Phase Motors PKP	Features Product Line
Product Number Product Line	Standard Type
High-Resolution Type	TS Geared Type
Common Specifications	Motor Pin Arrangement
Drivers for 2-Phase/5-Phase Motors	Cables
Peripheral Equipment	





## Product Number

### Motor

◇ Frame Size 20 mm, 85 mm

Standard Type

**PK 5 1 3 P A**

① ② ③ ④ ⑤ ⑧

**PK 5 9 6 H N A W**

① ② ③ ④ ⑥ ⑦ ⑧ ⑪

Standard Type with Encoder

**PK 5 1 3 P A - R3G L**

① ② ③ ④ ⑤ ⑧ ⑨ ⑩

◇ Frame Size 28 mm, 42 mm, 56.4 mm, 60 mm

Standard Type, High-Resolution Type

**PKP 5 6 6 F N 24 A 2**

① ② ③ ④ ⑤ ⑦ ⑧ ⑨ ⑩

**PKP 5 4 4 M N 18 A**

① ② ③ ④ ⑥ ⑦ ⑧ ⑨

Standard Type with Encoder/High-Resolution Type with Encoder

**PKP 5 6 6 F N 24 A 2 - R3G L**

① ② ③ ④ ⑤ ⑦ ⑧ ⑨ ⑩ ⑪ ⑫

TS Geared Type

**PKP 5 4 3 N 18 A 2 - TS 30**

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩

### Driver

Refer to page D-1 for details on drivers.

### Connection Cable

◇ Motor Connection Cable

**LC 5 N 06 E**

① ② ③ ④ ⑤

◇ Encoder Connection Cable

**LC E 08 A - 006**

① ② ③ ④ ⑤

①	Series Name	<b>PK: PK</b> Series
②	<b>5:</b> 5-Phase	
③	Motor Frame Size	<b>1:</b> 20 mm <b>9:</b> 85 mm
④	Motor Case Length	
⑤	Motor Classification	
⑥	Motor Type	Blank: Standard Model <b>H:</b> High Speed Specification
⑦	Number of Lead Wires	<b>N:</b> 5 Leads
⑧	Configuration	<b>A:</b> Single Shaft <b>B:</b> Double Shaft
⑨	Encoder Resolution	<b>R3G:</b> 500 P/R
⑩	Encoder Output Circuit Type	Blank: Voltage Output <b>L:</b> Line Driver Output
⑪	Cable Identification	Blank: Connector Coupled Type <b>W:</b> Lead Wire Type

①	Series Name	<b>PKP: PKP</b> Series
②	<b>5:</b> 5-Phase	
③	Motor Frame Size	<b>2:</b> 28 mm <b>4:</b> 42 mm <b>6:</b> 56.4 mm (60 mm when the motor classification is "F")
④	Motor Case Length	
⑤	Motor Classification	<b>F:</b> Motor Frame Size 60 mm
⑥	Motor Type	Blank: Standard Type <b>M:</b> High-Resolution Type
⑦	Number of Lead Wires	<b>N:</b> 5 Leads
⑧	Motor Winding Specifications	
⑨	Configuration	<b>A:</b> Single Shaft <b>B:</b> Double Shaft
⑩	Reference Number	
⑪	Encoder Resolution	<b>R3G:</b> 500 P/R <b>R3J:</b> 1000 P/R
⑫	Encoder Output Circuit Type	Blank: Voltage Output <b>L:</b> Line Driver Output

● Some products with a shaft diameter of  $\phi 6.35$  mm are also available. For details, please contact your nearest Oriental Motor sales office.

①	Series Name	<b>PKP: PKP</b> Series
②	<b>5:</b> 5-Phase	
③	Motor Frame Size	<b>4:</b> 42 mm <b>6:</b> 60 mm
④	Motor Case Length	
⑤	Number of Lead Wires	<b>N:</b> 5 Leads
⑥	Motor Winding Specifications	
⑦	Configuration	<b>A:</b> Single Shaft <b>B:</b> Double Shaft
⑧	Reference Number	
⑨	Geared Type	<b>TS: TS</b> Geared Type
⑩	Gear Ratio	

①	Cables	<b>LC:</b> Connector Leads
②	<b>5:</b> 5-Phase	
③	Cable Type	<b>N:</b> For 5-Phase
④	Cable Length	<b>06:</b> 0.6 m <b>10:</b> 1 m
⑤	Reference Number	

①	Cables	<b>LC:</b> Connector Leads
②	Cable Type	<b>E:</b> For Encoder
③	Applicable Model	<b>05:</b> For Voltage Output <b>08:</b> For Line Driver Output
④	Reference Number	
⑤	Cable Length	<b>006:</b> 0.6 m

2-Phase  
Motors  
**PKP**

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

Flat  
Type

**SH** Geared  
Type

**CS** Geared  
Type

Common  
Specifications

Inner  
Wiring  
of Motor

5-Phase  
Motors  
**PKP**

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

**TS** Geared  
Type

Common  
Specifications

Motor  
Pin  
Arrangement

Drivers for  
2-Phase/5-Phase  
Motors

Cables

Peripheral  
Equipment

Motor Frame Size
□13 mm
□20 mm
□28 mm
□35 mm
□42 mm
□50 mm □51 mm
□56.4 mm
□60 mm □61 mm
□85 mm □90 mm

## Product Line

A connection cable is required for connector-coupled motors.

Motors, drivers, and cables are must be ordered individually. Refer to page 152 for connection cable.

### ● Motor

#### ◇ Standard Type

Product Name (Single Shaft)	Product Name (Double Shaft)
<b>PK513PA</b>	<b>PK513PB</b>
<b>PKP523N12A</b>	<b>PKP523N12B</b>
<b>PKP525N12A</b>	<b>PKP525N12B</b>
<b>PKP543N18A2</b>	<b>PKP543N18B2</b>
<b>PKP544N18A2</b>	<b>PKP544N18B2</b>
<b>PKP544N18A</b>	<b>PKP544N18B</b>
<b>PKP545N18A2</b>	<b>PKP545N18B2</b>
<b>PKP546N18A2</b>	<b>PKP546N18B2</b>
<b>PKP546N18A</b>	<b>PKP546N18B</b>
<b>PKP564N28A2</b>	<b>PKP564N28B2</b>
<b>PKP566N28A2</b>	<b>PKP566N28B2</b>
<b>PKP568N28A2</b>	<b>PKP568N28B2</b>
<b>PKP564FN24A2</b>	<b>PKP564FN24B2</b>
<b>PKP564FN38A2</b>	<b>PKP564FN38B2</b>
<b>PKP566FN24A2</b>	<b>PKP566FN24B2</b>
<b>PKP566FN38A2</b>	<b>PKP566FN38B2</b>
<b>PKP569FN24A2</b>	<b>PKP569FN24B2</b>
<b>PKP569FN38A2</b>	<b>PKP569FN38B2</b>
<b>PK596HNAW</b>	<b>PK596HNBW</b>
<b>PK599HNAW</b>	<b>PK599HNBW</b>
<b>PK5913HNAW</b>	<b>PK5913HNBW</b>

#### ◇ High-Resolution Type

Product Name (Single Shaft)	Product Name (Double Shaft)
<b>PKP523MN03A</b>	<b>PKP523MN03B</b>
<b>PKP523MN07A</b>	<b>PKP523MN07B</b>
<b>PKP524MN03A</b>	<b>PKP524MN03B</b>
<b>PKP524MN07A</b>	<b>PKP524MN07B</b>
<b>PKP525MN03A</b>	<b>PKP525MN03B</b>
<b>PKP525MN07A</b>	<b>PKP525MN07B</b>
<b>PKP544MN18A</b>	<b>PKP544MN18B</b>
<b>PKP546MN18A</b>	<b>PKP546MN18B</b>
<b>PKP564FMN24A</b>	<b>PKP564FMN24B</b>
<b>PKP566FMN24A</b>	<b>PKP566FMN24B</b>
<b>PKP569FMN24A</b>	<b>PKP569FMN24B</b>

#### ◇ TS Geared Type

Product Name (Single Shaft)	Product Name (Double Shaft)
<b>PKP544N18A2-TS3.6</b>	<b>PKP544N18B2-TS3.6</b>
<b>PKP544N18A2-TS7.2</b>	<b>PKP544N18B2-TS7.2</b>
<b>PKP544N18A2-TS10</b>	<b>PKP544N18B2-TS10</b>
<b>PKP543N18A2-TS20</b>	<b>PKP543N18B2-TS20</b>
<b>PKP543N18A2-TS30</b>	<b>PKP543N18B2-TS30</b>
<b>PKP566N28A2-TS3.6</b>	<b>PKP566N28B2-TS3.6</b>
<b>PKP566N28A2-TS7.2</b>	<b>PKP566N28B2-TS7.2</b>
<b>PKP566N28A2-TS10</b>	<b>PKP566N28B2-TS10</b>
<b>PKP564N28A2-TS20</b>	<b>PKP564N28B2-TS20</b>
<b>PKP564N28A2-TS30</b>	<b>PKP564N28B2-TS30</b>

## Included

Type	Included	Parallel Key	Motor Installation Screw	Operating Manual
Standard Type		—	—	—
High-Resolution Type		—	—	—
With Encoder		—	—	1 Set
<b>TS</b> Geared Type	Frame Size 42 mm	—	—	—
	Frame Size 60 mm	1 Piece	M4×60 P0.7 (4 Screws)	

## How to Read Specifications

Maximum Holding Torque	: This is the maximum holding torque (holding force) the motor has when power is supplied (at rated current) but the motor is not rotating. (With geared types, the value of holding torque considers the permissible strength of the gear.)
Permissible Torque	: The permissible torque represents the maximum value limited by the mechanical strength of the output gear shaft when operated at a constant speed.
Maximum Instantaneous Torque	: This is the maximum torque that can be applied to the gear output shaft during acceleration/deceleration such when an inertial load is started and stopped.

● A letter “**G**” (500 P/R) or “**J**” (1000 P/R) indicating the encoder resolution is specified where the box □ is located in the product name.

A letter “**L**” (line driver output) indicating the encoder output circuit configuration is specified where the box ■ is located in the product name. For voltage output, there is no letter in the ■ box.

#### ◇ Standard Type with Encoder

Product Name
<b>PK513PA-R3G</b> ■
<b>PKP523N03A-R3G</b> ■
<b>PKP523N07A-R3G</b> ■
<b>PKP523N12A-R3G</b> ■
<b>PKP525N03A-R3G</b> ■
<b>PKP525N07A-R3G</b> ■
<b>PKP525N12A-R3G</b> ■
<b>PKP543N18A2-R3G</b> ■
<b>PKP544N18A2-R3</b> □■
<b>PKP545N18A2-R3G</b> ■
<b>PKP546N18A2-R3G</b> ■
<b>PKP564N28A2-R3G</b> ■
<b>PKP566N28A2-R3G</b> ■
<b>PKP568N28A2-R3G</b> ■
<b>PKP564FN24A2-R3G</b> ■
<b>PKP564FN38A2-R3G</b> ■
<b>PKP566FN24A2-R3</b> □■
<b>PKP566FN38A2-R3G</b> ■
<b>PKP569FN24A2-R3G</b> ■
<b>PKP569FN38A2-R3G</b> ■

#### ◇ High-Resolution Type with Encoder

Product Name
<b>PKP523MN03A-R3J</b> ■
<b>PKP523MN07A-R3J</b> ■
<b>PKP524MN03A-R3J</b> ■
<b>PKP524MN07A-R3J</b> ■
<b>PKP525MN03A-R3J</b> ■
<b>PKP525MN07A-R3J</b> ■
<b>PKP544MN18A-R3J</b> ■
<b>PKP546MN18A-R3J</b> ■
<b>PKP564FMN24A-R3J</b> ■
<b>PKP566FMN24A-R3J</b> ■
<b>PKP569FMN24A-R3J</b> ■

### ● Driver

For details about drivers refer to page 138.

### ● Connection Cable

For the applicable motor of the connection cable, refer to the dimension page of each product.

Some cables that can be directly connected to the recommended driver are also available. See page 152.

# Standard Type

## Frame Size 20 mm

### Connector Type

### Specifications

Product Name		Maximum Holding Torque Nm	Rotor Inertia J: kgm <sup>2</sup>	Rated Current A/Phase	Winding Resistance Ω/Phase	Basic Step Angle	Recommended Driver Product Name*
Single Shaft	Double Shaft						
<b>PK513PA</b>	<b>PK513PB</b>	0.0231	$1.6 \times 10^{-7}$	0.35	3.5	0.72°	<b>CVD503BR-K</b>


\*See "Drivers for 2-Phase / 5-Phase Motors" page for drivers that can be used in combination.

#### Note

- Be sure to set the driver current at or below the motor rated current. If the motor rated current is exceeded, the product will be damaged.

### Speed – Torque Characteristics (Reference values) fs: Max. Starting Frequency

#### PK513PA/PK513PB

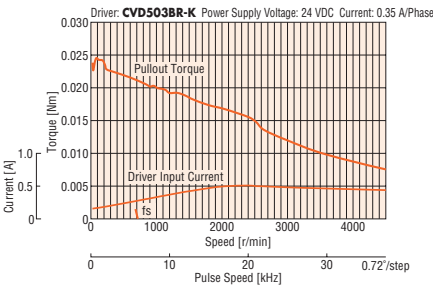

#### Note

- Data for the speed – torque characteristics is based on Oriental Motor's internal measurement conditions. If the conditions are changed, the characteristics may also change as a result.
- Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C max.
- The characteristics are the same when RS-485 communication type driver is used in combination.

### Dimensions (Unit: mm)

#### Motor


Product Name	Mass [kg]
<b>PK513PA</b>	0.05
<b>PK513PB</b>	

#### Applicable Connectors

Connector Housing: 51065-0500 (Molex)

Contact: 50212-8100 (Molex)

Crimping Tool: 57176-5000 (Molex)

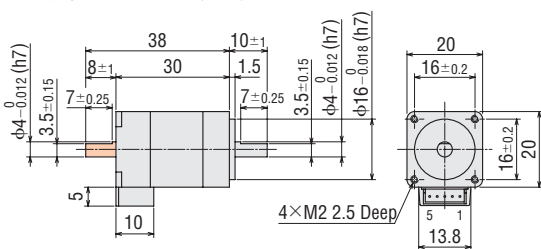

- These dimensions are for double shaft motors.

For single shaft motors, ignore the shaded in the  areas.

### Motor Pin Assignments


#### Motor Pin Assignments: Model B

- Refer to the motor pin arrangement page for information on motor pin arrangement.

#### Connection Cable (Sold separately)

##### ◇ Motor Connection Cable

Product Name	Length L [m]
<b>LC5N06A</b>	0.6
<b>LC5N10A</b>	1

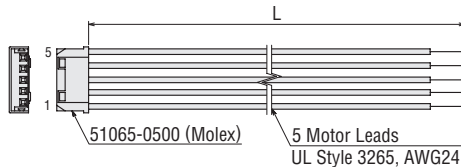

2-Phase  
Motors  
**PKP**

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

Flat  
Type

**SH** Geared  
Type

**CS** Geared  
Type

Common  
Specifications

Inner  
Wiring  
of Motor

5-Phase  
Motors  
**PKP**

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

**TS** Geared  
Type

Common  
Specifications

Motor  
Pin  
Arrangement

Drivers for  
2-Phase/5-Phase  
Motors

Cables

Peripheral  
Equipment

- Motor  
Frame Size
- 13 mm
- 20 mm
- 28 mm
- 35 mm
- 42 mm
- 50 mm
- 51 mm
- 56.4 mm
- 60 mm
- 61 mm
- 85 mm
- 90 mm

# Standard Type with Encoder

## Frame Size 20 mm

### Connector Type


### Specifications

Product Name	Maximum Holding Torque Nm	Rotor Inertia J: kgm <sup>2</sup>	Rated Current A/Phase	Winding Resistance Ω/Phase	Basic Step Angle	Recommended Driver Product Name*
<b>PK513PA-R2GL</b>	0.0231	$1.66 \times 10^{-7}$	0.35	3.5	0.72°	<b>CVD503BR-K</b>

● See "Common Specifications" page for encoder specifications.  
 \*See "Drivers for 2-Phase / 5-Phase Motors" page for drivers that can be used in combination.

**Note**  
 ● Be sure to set the driver current at or below the motor rated current. If the motor rated current is exceeded, the product will be damaged.

### Speed – Torque Characteristics (Reference values) fs: Max. Starting Frequency

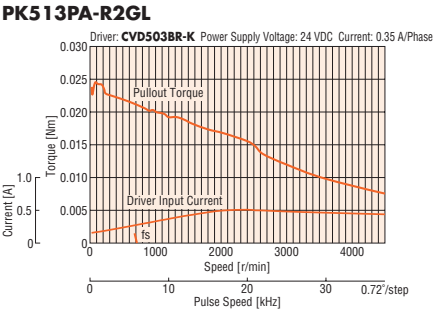


**Note**  
 ● Data for the speed – torque characteristics is based on Oriental Motor's internal measurement conditions. If the conditions are changed, the characteristics may also change as a result.  
 ● For the type with an encoder, to protect the encoder, be sure to keep the motor case temperature at 85°C max.  
 ● The characteristics are the same when RS-485 communication type driver is used in combination.

### Dimensions (Unit: mm)

#### Motor

Product Name	Mass [kg]
<b>PK513PA-R2GL</b>	0.06

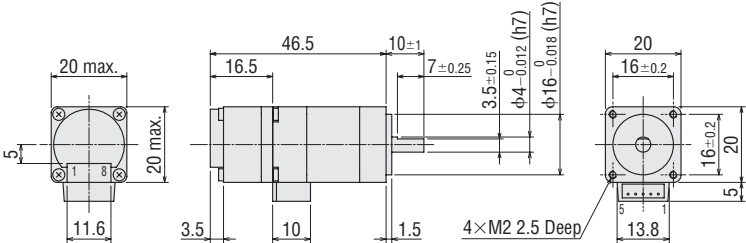


● Applicable Connectors (Molex)

	Motor	Encoder
Connector Housing	51065-0500	51021-0800
Contact	50212-8100	50079-8100
Crimp Tool	57176-5000	57177-5000

#### Connection Cable (Sold separately)

##### Motor Connection Cable


Product Name	Length L [m]
<b>LC5N06A</b>	0.6
<b>LC5N10A</b>	1

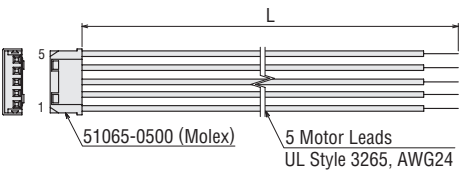

#### Connection Cable (Included)

##### Encoder Connection Cable

Product Name	Length L [m]
<b>LCE08A-006</b>	0.6

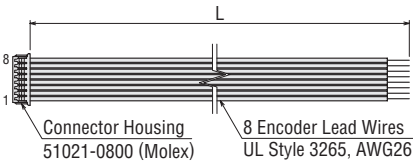

### Motor Pin Assignments

Motor Pin Assignments: Model B

● Refer to the motor pin arrangement page for information on motor pin arrangement.

# Standard Type Frame Size 28 mm

## Connector Type

### Specifications

Product Name		Maximum Holding Torque Nm	Rotor Inertia J: kgm <sup>2</sup>	Rated Current A/Phase	Winding Resistance Ω/Phase	Basic Step Angle	Recommended Driver Product Name*
Single Shaft	Double Shaft						
<b>PKP523N12A</b>	<b>PKP523N12B</b>	0.052	$9 \times 10^{-7}$	1.2	0.63	0.72°	<b>CVD512BR-K</b>
<b>PKP525N12A</b>	<b>PKP525N12B</b>	0.091	$18 \times 10^{-7}$		1		


\*See "Drivers for 2-Phase / 5-Phase Motors" page for drivers that can be used in combination.

#### Note


- Be sure to set the driver current at or below the motor rated current. If the motor rated current is exceeded, the product will be damaged.

### Speed – Torque Characteristics (Reference values) $f_s$ : Max. Starting Frequency

#### PKP523N12A/ PKP523N12B

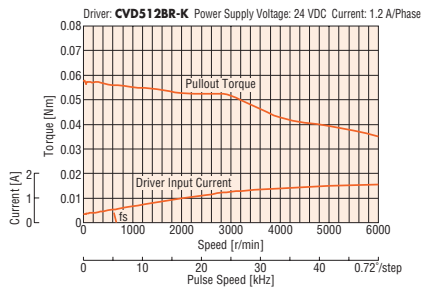

#### PKP525N12A/ PKP525N12B

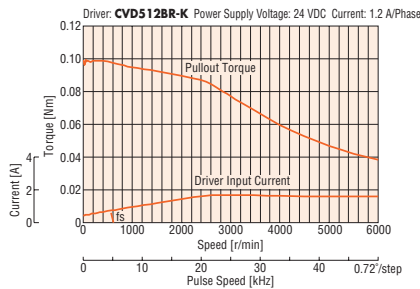

#### Note

- Data for the speed – torque characteristics is based on Oriental Motor's internal measurement conditions. If the conditions are changed, the characteristics may also change as a result.
- Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C max.
- The characteristics are the same when RS-485 communication type driver is used in combination.

### Dimensions (Unit: mm)

#### Motor


Product Name	L1	L2	Mass [kg]
<b>PKP523N12A</b>	32	—	0.11
<b>PKP523N12B</b>		42	
<b>PKP525N12A</b>	51.5	—	0.2
<b>PKP525N12B</b>		61.5	

#### Applicable Connectors

Connector Housing: 51065-0500 (Molex)

Contact: 50212-8100 (Molex)

Crimping Tool: 57176-5000 (Molex)

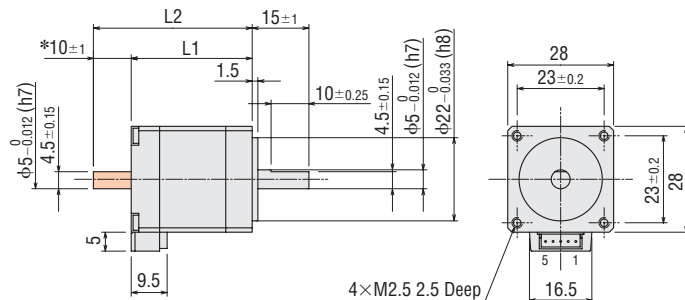

\*The length of the shaft flat on the double shaft model is 10±0.25.


These dimensions are for double shaft motors.

For single shaft motors, ignore the shaded in the areas.

#### Connection Cable (Sold separately)

##### Motor Connection Cable

Product Name	Length L [m]
<b>LC5N06A</b>	0.6
<b>LC5N10A</b>	1

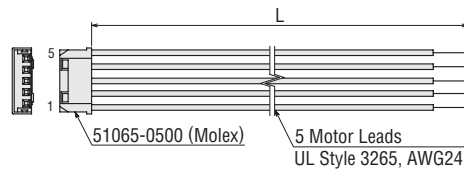

### Motor Pin Assignments

#### Motor Pin Assignments: Model B

- Refer to the motor pin arrangement page for information on motor pin arrangement.

2-Phase  
Motors  
**PKP**

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

Flat  
Type

**SH** Geared  
Type

**CS** Geared  
Type

Common  
Specifications

Inner  
Wiring  
of Motor

5-Phase  
Motors  
**PKP**

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

**TS** Geared  
Type

Common  
Specifications

Motor  
Pin  
Arrangement

Drivers for  
2-Phase/5-Phase  
Motors

Cables

Peripheral  
Equipment

**NEW**

# Standard Type with Encoder

## Frame Size 28 mm

### Connector Type

## Specifications

Product Name	Maximum Holding Torque Nm	Rotor Inertia J: kgm <sup>2</sup>	Rated Current A/Phase	Winding Resistance Ω/Phase	Basic Step Angle	Recommended Driver Product Name*
<b>PKP523N03A-R3G</b> ■	0.048	$9.9 \times 10^{-7}$	0.35	4.95	0.72°	<b>CVD503BR-K</b>
<b>PKP523N07A-R3G</b> ■			0.75	1.1		<b>CVD507BR-K</b>
<b>PKP523N12A-R3G</b> ■			1.2	0.63		<b>CVD512BR-K</b>
<b>PKP525N03A-R3G</b> ■	0.078	$19 \times 10^{-7}$	0.35	6.5		<b>CVD503BR-K</b>
<b>PKP525N07A-R3G</b> ■			0.75	1.41		<b>CVD507BR-K</b>
<b>PKP525N12A-R3G</b> ■			1.2	1		<b>CVD512BR-K</b>

● A letter "L" (line driver output) indicating the encoder output circuit configuration is specified where the box ■ is located in the product name. For voltage output, there is no letter in the ■ box.

● Refer to the common specifications page for encoder specifications.


\*See "Drivers for 2-Phase / 5-Phase Motors" page for drivers that can be used in combination.

### Note


● Be sure to set the driver current at or below the motor rated current. If the motor rated current is exceeded, the product will be damaged.

## Speed - Torque Characteristics (Reference values) fs: Max. Starting Frequency


### PKP523N03A-R3G■

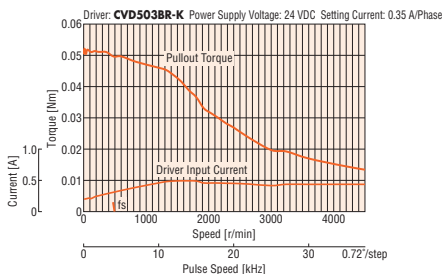


### PKP523N07A-R3G■

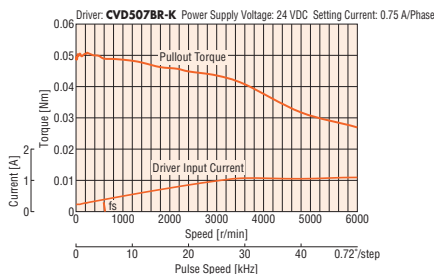


### PKP523N12A-R3G■

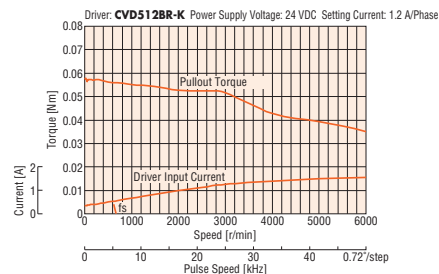


### PKP525N03A-R3G■

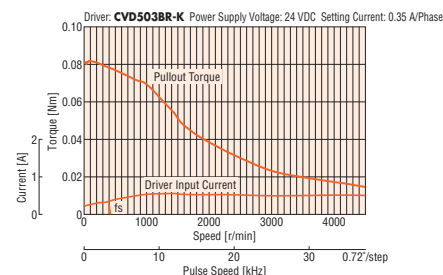

### PKP525N07A-R3G■

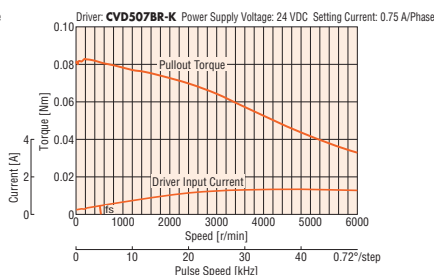

### PKP525N12A-R3G■

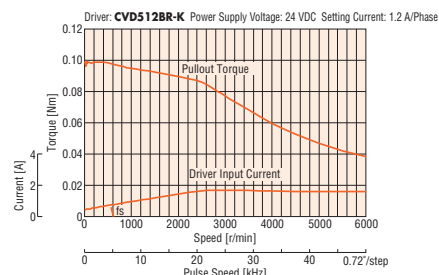

### Note

- Data for the speed – torque characteristics is based on Oriental Motor's internal measurement conditions. If the conditions are changed, the characteristics may also change as a result.
- Depending on the driving conditions, a considerable amount of heat may be generated by the motor. To protect the encoder, be sure to keep the motor case temperature at 85°C max.
- The characteristics are the same if combined with an RS-485 communication type driver.

● A letter "L" (line driver output) indicating the encoder output circuit configuration is specified where the box ■ is located in the product name. For voltage output, there is no letter in the ■ box.




## Dimensions (Unit = mm)

### Motor

Product Name	L	Mass [kg]
<b>PKP523N03A-R3G</b> ■	47.5	0.13
<b>PKP523N07A-R3G</b> ■		
<b>PKP523N12A-R3G</b> ■		
<b>PKP525N03A-R3G</b> ■	67	0.22
<b>PKP525N07A-R3G</b> ■		
<b>PKP525N12A-R3G</b> ■		

● Applicable Connector (Molex)


	Motor	Encoder
Connector Housing	51065-0500	51021-0800
Contact	50212-8100	50079-8100
Crimp Tool	57176-5000	57177-5000

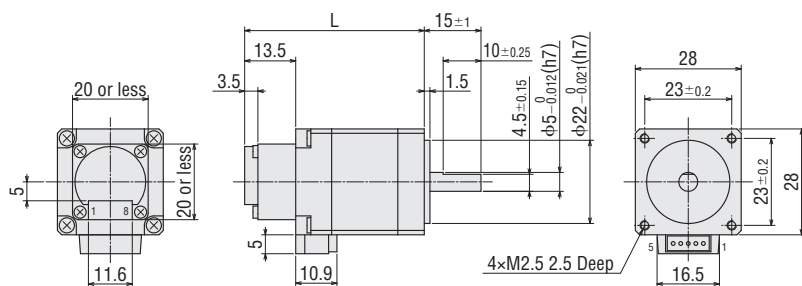

### Connection Cable (Sold separately)

#### Motor Connection Cable

Product Name	Length L [m]
<b>LC5N06A</b>	0.6
<b>LC5N10A</b>	1

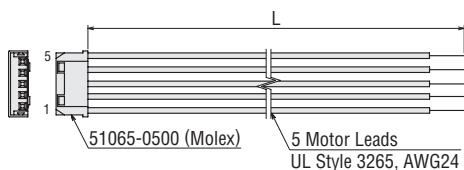

#### Encoder Connection Cable

##### For Voltage Output

Product Name	Length L [m]
<b>LCE05A-006</b>	0.6

##### For Line Driver Output

Product Name	Length L [m]
<b>LCE08A-006</b>	0.6

● Refer to the cables page for dimensions.

## Motor Pin Arrangement

Motor Pin Arrangement: Model B

● Refer to the motor pin arrangement page for information on motor pin arrangement.

2-Phase  
Motors  
**PKP**

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

Flat  
Type

**SH** Geared  
Type

**CS** Geared  
Type

Common  
Specifications

Inner  
Wiring  
of Motor

5-Phase  
Motors  
**PKP**

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

**TS** Geared  
Type

Common  
Specifications

Motor  
Pin  
Arrangement

Drivers for  
2-Phase/5-Phase  
Motors

Cables

Peripheral  
Equipment

● A letter "L" (line driver output) indicating the encoder output circuit configuration is specified where the box ■ is located in the product name. For voltage output, there is no letter in the ■ box.

- Motor  
Frame Size
- 13 mm
- 20 mm
- 28 mm
- 35 mm
- 42 mm
- 50 mm
- 51 mm
- 56.4 mm
- 60 mm
- 61 mm
- 85 mm
- 90 mm

# Standard Type

## Frame Size 42 mm

### Mini-Connector Type

#### Specifications

Product Name		Maximum Holding Torque Nm	Rotor Inertia J: kgm <sup>2</sup>	Rated Current A/Phase	Winding Resistance Ω/Phase	Basic Step Angle	Recommended Driver Product Name*
Single Shaft	Double Shaft						
<b>PKP543N18A2</b>	<b>PKP543N18B2</b>	0.22	35×10 <sup>-7</sup>	1.8	0.4	0.72°	<b>CVD518BR-K</b>
<b>PKP544N18A2</b>	<b>PKP544N18B2</b>	0.3	55×10 <sup>-7</sup>		0.48		
<b>PKP545N18A2</b>	<b>PKP545N18B2</b>	0.37	71×10 <sup>-7</sup>		0.55		
<b>PKP546N18A2</b>	<b>PKP546N18B2</b>	0.5	110×10 <sup>-7</sup>		0.64		


\*See "Drivers for 2-Phase / 5-Phase Motors" page for drivers that can be used in combination.

#### Note


- Be sure to set the driver current at or below the motor rated current. If the motor rated current is exceeded, the product will be damaged.

#### Speed – Torque Characteristics (Reference values) fs: Max. Starting Frequency


##### PKP543N18A2/ PKP543N18B2

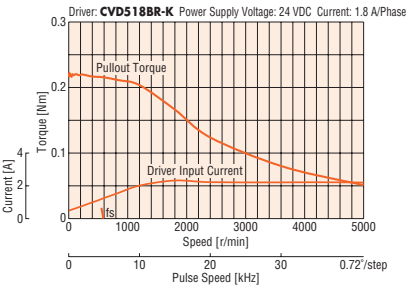


##### PKP544N18A2/ PKP544N18B2

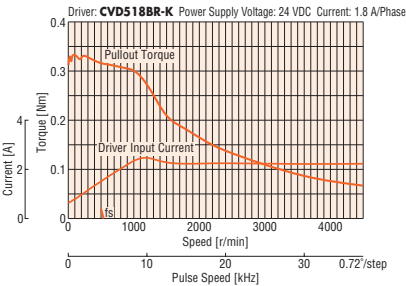

##### PKP545N18A2/ PKP545N18B2

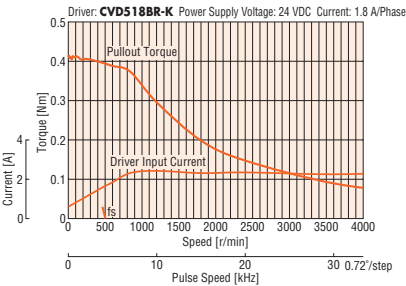

##### PKP546N18A2/ PKP546N18B2

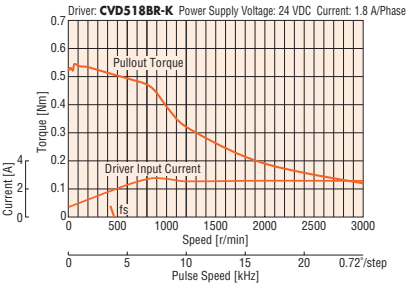

#### Note

- Data for the speed – torque characteristics is based on Oriental Motor's internal measurement conditions. If the conditions are changed, the characteristics may also change as a result.
- Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C max.
- The characteristics are the same when RS-485 communication type driver is used in combination.

#### Dimensions (Unit: mm)

##### Motor


Product Name	L1	L2	Mass [kg]
<b>PKP543N18A2</b>	33	—	0.23
<b>PKP543N18B2</b>		48	
<b>PKP544N18A2</b>	39	—	0.29
<b>PKP544N18B2</b>		54	
<b>PKP545N18A2</b>	47	—	0.37
<b>PKP545N18B2</b>		62	
<b>PKP546N18A2</b>	59	—	0.49
<b>PKP546N18B2</b>		74	

##### Applicable Connectors

Connector Housing: MDF97A-5S-3.5C (HIROSE ELECTRIC CO., LTD)

Contact: MDF97-22SC (HIROSE ELECTRIC CO., LTD)


Crimping Tool: HT801/MDF97-22S (HIROSE ELECTRIC CO., LTD)

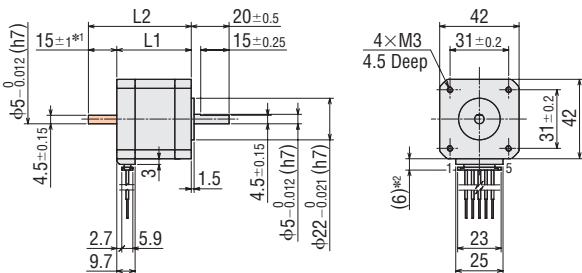

\*1 The length of the shaft flat on the double shaft model is 15±0.25.

\*2 With connection cable.


These dimensions are for double shaft motors.

For single shaft motors, ignore the shaded in the  areas.

##### Connection Cable (Sold separately)

##### Motor Connection Cable

Product Name	Length L [m]
<b>LC5N06E</b>	0.6
<b>LC5N10E</b>	1

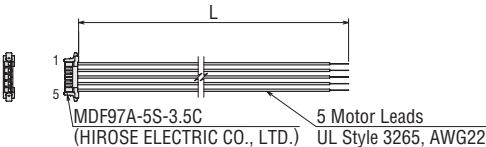

#### Motor Pin Assignments

##### Motor Pin Assignments: Model A

- Refer to the motor pin arrangement page for information on motor pin arrangement.



Motor Frame Size

13 mm

20 mm

28 mm

35 mm

42 mm

50 mm

51 mm

56.4 mm

60 mm

61 mm

85 mm

90 mm

# Standard Type with Encoder

## Frame Size 42 mm

### Mini-Connector Type

### Specifications

Product Name	Maximum Holding Torque Nm	Rotor Inertia J: kgm <sup>2</sup>	Rated Current A/Phase	Winding Resistance Ω/Phase	Basic Step Angle	Recommended Driver Product Name*
PKP543N18A2-R3G	0.22	36×10 <sup>-7</sup>	1.8	0.4	0.72°	CVD518BR-K
PKP544N18A2-R3	0.3	56×10 <sup>-7</sup>		0.48		
PKP545N18A2-R3G	0.37	72×10 <sup>-7</sup>		0.55		
PKP546N18A2-R3G	0.5	111×10 <sup>-7</sup>		0.64		


- A letter “G” (500 P/R) or “J” (1000 P/R) indicating the encoder resolution is specified where the box   is located in the product name.  
A letter “L” (line driver output) indicating the encoder output circuit configuration is specified where the box   is located in the product name. For voltage output, there is no letter in the   box.
- Refer to the common specifications page for encoder specifications.
- \*See "Drivers for 2-Phase / 5-Phase Motors" page for drivers that can be used in combination.

#### Note


- Be sure to set the driver current at or below the motor rated current. If the motor rated current is exceeded, the product will be damaged.

### Speed - Torque Characteristics (Reference values) fs: Max. Starting Frequency


PKP543N18A2-R3G

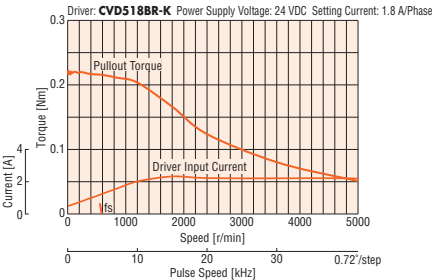


PKP544N18A2-R3

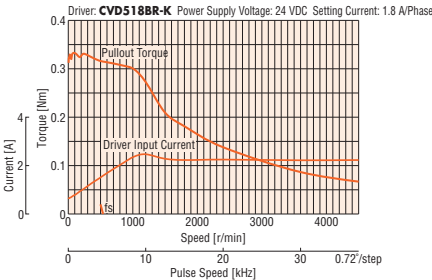

PKP545N18A2-R3G

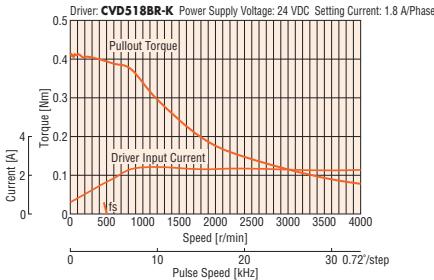

PKP546N18A2-R3G

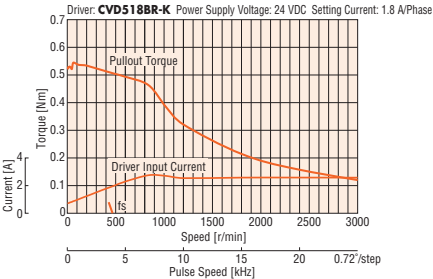

#### Note

- Data for the speed – torque characteristics is based on Oriental Motor’s internal measurement conditions. If the conditions are changed, the characteristics may also change as a result.
- Depending on the driving conditions, a considerable amount of heat may be generated by the motor. To protect the encoder, be sure to keep the motor case temperature at 85°C max.
- The characteristics are the same if combined with an RS-48S communication type driver.

- A letter “G” (500 P/R) or “J” (1000 P/R) indicating the encoder resolution is specified where the box   is located in the product name.  
A letter “L” (line driver output) indicating the encoder output circuit configuration is specified where the box   is located in the product name. For voltage output, there is no letter in the   box.


## ■ Dimensions (Unit = mm)

### ● Motor

Product Name	L	Mass [kg]
<b>PKP543N18A2-R3G</b> ■	46.5	0.25
<b>PKP544N18A2-R3</b> □■	52.5	0.31
<b>PKP545N18A2-R3G</b> ■	60.5	0.39
<b>PKP546N18A2-R3G</b> ■	72.5	0.51

● Applicable Connector (Molex)

	Motor (HIROSE ELECTRIC CO., LTD.)	Encoder (Molex)
Connector Housing	MDF97A-5S-3.5C	51021-0800
Contact	MDF97-22SC	50079-8100
Crimp Tool	HT801/MDF97-22S	57177-5000

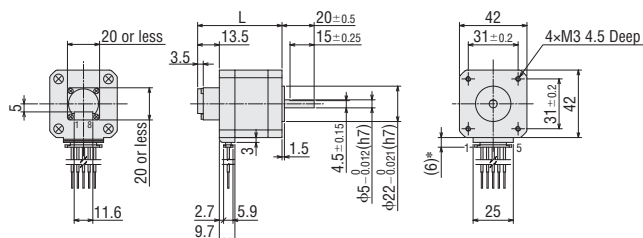

\*With connection cable

## ■ Motor Pin Arrangement


Motor Pin Arrangement: Model A

● Refer to the motor pin arrangement page for information on motor pin arrangement.

### ● Connection Cable (Sold separately)

#### ◇ Motor Connection Cable

Product Name	Length L [m]
<b>LC5N06E</b>	0.6
<b>LC5N10E</b>	1

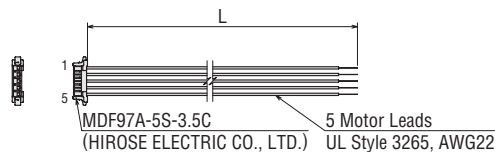

#### ◇ Encoder Connection Cable

##### ● For Voltage Output

Product Name	Length L [m]
<b>LCE05A-006</b>	0.6

##### ● For Line Driver Output

Product Name	Length L [m]
<b>LCE08A-006</b>	0.6

● Refer to the cables page for dimensions.

2-Phase  
Motors  
**PKP**

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

Flat  
Type

**SH** Geared  
Type

**CS** Geared  
Type

Common  
Specifications

Inner  
Wiring  
of Motor

5-Phase  
Motors  
**PKP**

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

**TS** Geared  
Type

Common  
Specifications

Motor  
Pin  
Arrangement

Drivers for  
2-Phase/5-Phase  
Motors

Cables

Peripheral  
Equipment

● A letter "G" (500 P/R) or "J" (1000 P/R) indicating the encoder resolution is specified where the box □ is located in the product name.

A letter "L" (line driver output) indicating the encoder output circuit configuration is specified where the box ■ is located in the product name. For voltage output, there is no letter in the ■ box.

- Motor  
Frame Size
- 13 mm
- 20 mm
- 28 mm
- 35 mm
- 42 mm
- 50 mm
- 51 mm
- 56.4 mm
- 60 mm
- 61 mm
- 85 mm
- 90 mm

# Standard Type

## Frame Size 56.4 mm

### Mini-Connector Type

### Specifications

Product Name		Maximum Holding Torque Nm	Rotor Inertia J: kgm <sup>2</sup>	Rated Current A/Phase	Winding Resistance Ω/Phase	Basic Step Angle	Recommended Driver Product Name*
Single Shaft	Double Shaft						
<b>PKP564N28A2</b>	<b>PKP564N28B2</b>	0.44	140×10 <sup>-7</sup>	2.8	0.16	0.72°	<b>CVD528BR-K</b>
<b>PKP566N28A2</b>	<b>PKP566N28B2</b>	0.81	270×10 <sup>-7</sup>		0.24		
<b>PKP568N28A2</b>	<b>PKP568N28B2</b>	1.5	500×10 <sup>-7</sup>		0.37		


\*See "Drivers for 2-Phase / 5-Phase Motors" page for drivers that can be used in combination.

#### Note


- Be sure to set the driver current at or below the motor rated current. If the motor rated current is exceeded, the product will be damaged.

### Speed – Torque Characteristics (Reference values) fs: Max. Starting Frequency


PKP564N28A2/ PKP564N28B2

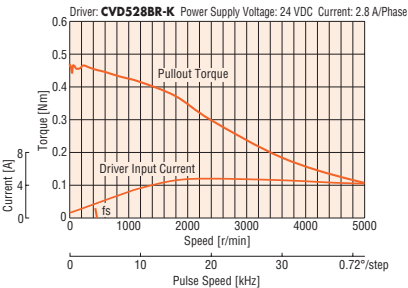

PKP566N28A2/ PKP566N28B2

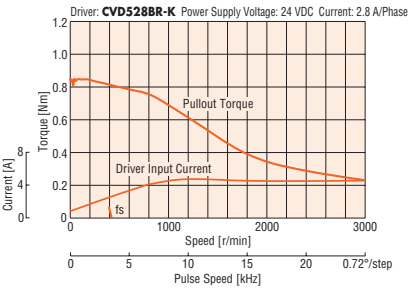

PKP568N28A2/ PKP568N28B2

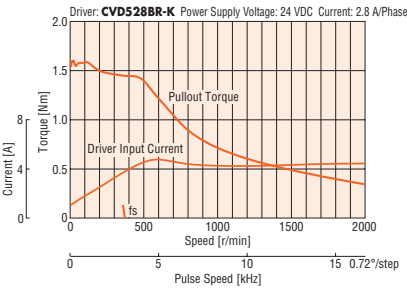

#### Note

- Data for the speed – torque characteristics is based on Oriental Motor's internal measurement conditions. If the conditions are changed, the characteristics may also change as a result.
- Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C max.
- The characteristics are the same when RS-485 communication type driver is used in combination.

### Dimensions (Unit: mm)

#### Motor


Product Name	L1	L2	Mass [kg]
<b>PKP564N28A2</b>	39	—	0.43
<b>PKP564N28B2</b>		62	
<b>PKP566N28A2</b>	54	—	0.67
<b>PKP566N28B2</b>		77	
<b>PKP568N28A2</b>	76	—	1
<b>PKP568N28B2</b>		99	

#### Applicable Connectors

Connector Housing: MDF97A-5S-3.5C (HIROSE ELECTRIC CO., LTD)

Contact: MDF97-22SC (HIROSE ELECTRIC CO., LTD)

Crimping Tool: HT801/MDF97-22S (HIROSE ELECTRIC CO., LTD)

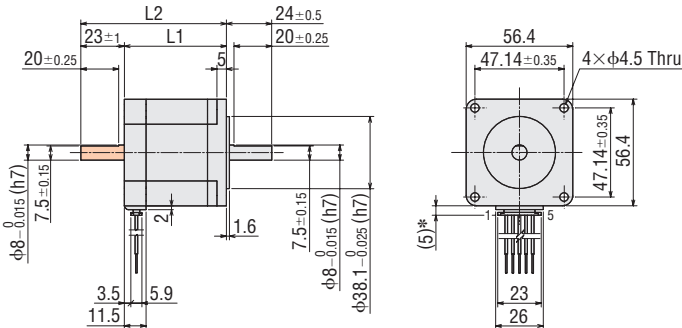

\*With connection cable


These dimensions are for double shaft motors.

For single shaft motors, ignore the shaded in the areas.

#### Connection Cable (Sold separately)

#### Motor Connection Cable

Product Name	Length L [m]
<b>LC5N06E</b>	0.6
<b>LC5N10E</b>	1

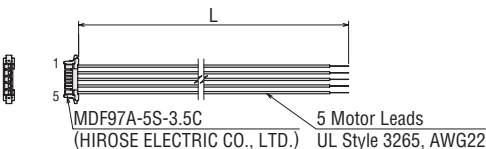

### Motor Pin Assignments

Motor Pin Assignments: Model A

- Refer to the motor pin arrangement page for information on motor pin arrangement.







# Standard Type with Encoder

## Frame Size 60 mm

### Mini-Connector Type

## Specifications

Product Name	Maximum Holding Torque Nm	Rotor Inertia J: kgm <sup>2</sup>	Rated Current A/Phase	Winding Resistance Ω/Phase	Basic Step Angle	Recommended Driver Product Name*
PKP564FN24A2-R3G	0.66	160×10 <sup>-7</sup>	2.4	0.28	0.72°	CVD524BR-K
PKP564FN38A2-R3G			3.8	0.12		CVD538BR-K
PKP566FN24A2-R3	1.15	290×10 <sup>-7</sup>	2.4	0.38		CVD524BR-K
PKP566FN38A2-R3G			3.8	0.16		CVD538BR-K
PKP569FN24A2-R3G	2.1	540×10 <sup>-7</sup>	2.4	0.64		CVD524BR-K
PKP569FN38A2-R3G			3.8	0.22		CVD538BR-K

● A letter "G" (500 P/R) or "J" (1000 P/R) indicating the encoder resolution is specified where the box □ is located in the product name.

A letter "L" (line driver output) indicating the encoder output circuit configuration is specified where the box ■ is located in the product name. For voltage output, there is no letter in the ■ box.

● Refer to the common specifications page for encoder specifications.


\*See "Drivers for 2-Phase / 5-Phase Motors" page for drivers that can be used in combination.

### Note


● Be sure to set the driver current at or below the motor rated current. If the motor rated current is exceeded, the product will be damaged.

## Speed - Torque Characteristics (Reference values) fs: Max. Starting Frequency


### PKP564FN24A2-R3G

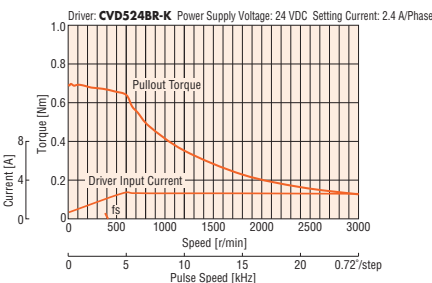


### PKP566FN24A2-R3

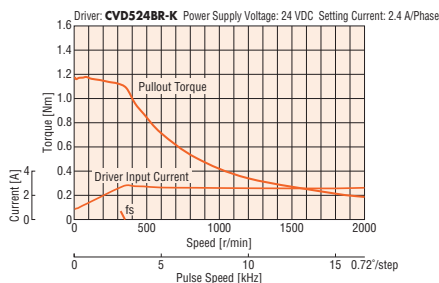


### PKP569FN24A2-R3G

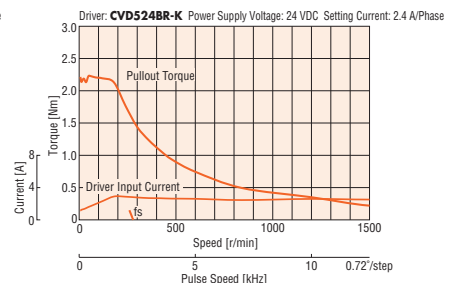


### PKP564FN38A2-R3G

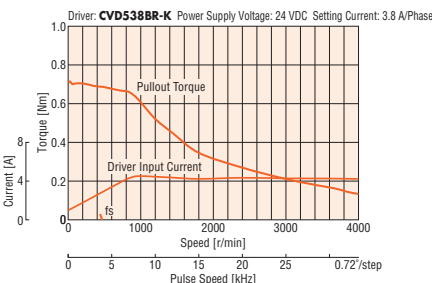

### PKP566FN38A2-R3G

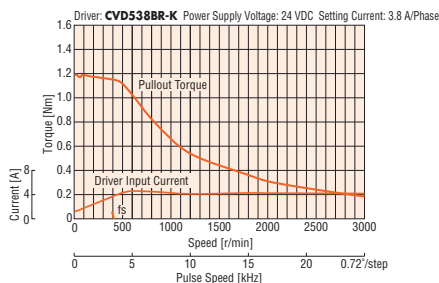

### PKP569FN38A2-R3G

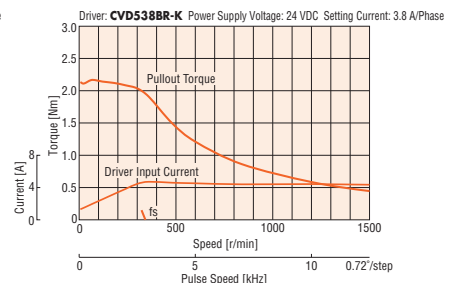

### Note

● Data for the speed – torque characteristics is based on Oriental Motor's internal measurement conditions. If the conditions are changed, the characteristics may also change as a result.

● Depending on the driving conditions, a considerable amount of heat may be generated by the motor. To protect the encoder, be sure to keep the motor case temperature at 85°C max.

● The characteristics are the same if combined with an RS-485 communication type driver.

● A letter "G" (500 P/R) or "J" (1000 P/R) indicating the encoder resolution is specified where the box □ is located in the product name.

A letter "L" (line driver output) indicating the encoder output circuit configuration is specified where the box ■ is located in the product name. For voltage output, there is no letter in the ■ box.

2-Phase  
Motors  
PKP

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

Flat  
Type

SH Geared  
Type

CS Geared  
Type

Common  
Specifications

Inner  
Wiring  
of Motor

5-Phase  
Motors  
PKP

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

TS Geared  
Type

Common  
Specifications

Motor  
Pin  
Arrangement

Drivers for  
2-Phase/5-Phase  
Motors

Cables

Peripheral  
Equipment



# Standard Type

## Frame Size 85 mm

### Lead Wire Type

### Specifications

Product Name		Maximum Holding Torque Nm	Rotor Inertia J: kgm <sup>2</sup>	Rated Current A/Phase	Winding Resistance Ω/Phase	Basic Step Angle	Recommended Driver Product Name*
Single Shaft	Double Shaft						
<b>PK596HNAW</b>	<b>PK596HNBW</b>	2.1	$1400 \times 10^{-7}$	2.8	0.41	0.72°	<b>CVD528BR-K</b>
<b>PK599HNAW</b>	<b>PK599HNBW</b>	4.1	$2700 \times 10^{-7}$		0.46		
<b>PK5913HNAW</b>	<b>PK5913HNBW</b>	6.3	$4000 \times 10^{-7}$		0.72		


\*See "Drivers for 2-Phase / 5-Phase Motors" page for drivers that can be used in combination.

#### Note


- Be sure to set the driver current at or below the motor rated current. If the motor rated current is exceeded, the product will be damaged.

### Speed – Torque Characteristics (Reference values) fs: Max. Starting Frequency


#### PK596HNAW/PK596HNBW

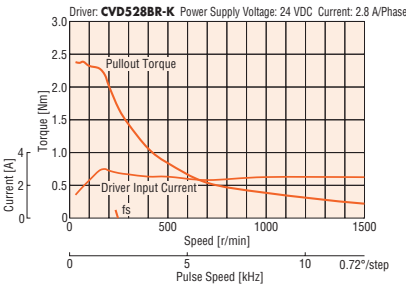

#### PK599HNAW/PK599HNBW

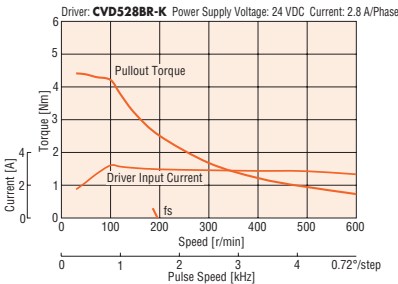

#### PK5913HNAW/PK5913HNBW

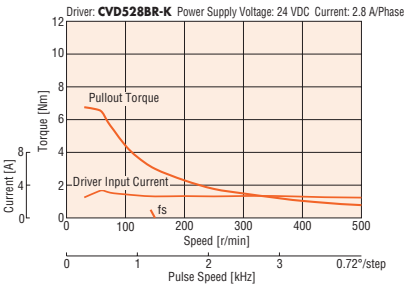


#### Note

- Data for the speed – torque characteristics is based on Oriental Motor's internal measurement conditions. If the conditions are changed, the characteristics may also change as a result.
- Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C max.



### Dimensions (Unit: mm)

#### Motor

Product Name	L1	L2	Mass [kg]
<b>PK596HNAW</b>	66	—	1.7
<b>PK596HNBW</b>		100	
<b>PK599HNAW</b>	96	—	2.8
<b>PK599HNBW</b>		130	
<b>PK5913HNAW</b>	126	—	3.8
<b>PK5913HNBW</b>		160	

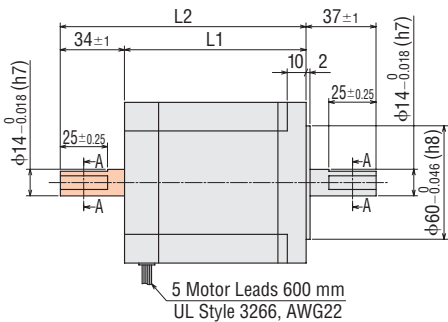

- These dimensions are for double shaft motors.
- For single shaft motors, ignore the shaded in the areas.



### Motor Pin Assignments

Motor Pin Assignments: Model C

- Refer to the motor pin arrangement page for information on motor pin arrangement.

2-Phase  
Motors  
**PKP**

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

Flat  
Type

**SH** Geared  
Type

**CS** Geared  
Type

Common  
Specifications

Inner  
Wiring  
of Motor

5-Phase  
Motors  
**PKP**

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

**TS** Geared  
Type

Common  
Specifications

Motor  
Pin  
Arrangement

Drivers for  
2-Phase/5-Phase  
Motors

Cables

Peripheral  
Equipment

- Motor Frame Size
- 13 mm
- 20 mm
- 28 mm
- 35 mm
- 42 mm
- 50 mm
- 51 mm
- 56.4 mm
- 60 mm
- 61 mm
- 85 mm
- 90 mm



# High-Resolution Type

## Frame Size 28 mm

### Connector Type

## Specifications

Product Name		Maximum Holding Torque Nm	Rotor Inertia J: kgm <sup>2</sup>	Rated Current A/Phase	Winding Resistance Ω/Phase	Basic Step Angle	Recommended Driver Product Name*
Single Shaft	Double Shaft						
<b>PKP523MN03A</b>	<b>PKP523MN03B</b>	0.042	9×10 <sup>-7</sup>	0.35	4.7	0.36°	<b>CVD503BR-K</b>
<b>PKP523MN07A</b>	<b>PKP523MN07B</b>	0.042	9×10 <sup>-7</sup>	0.75	1.06		<b>CVD507BR-K</b>
<b>PKP524MN03A</b>	<b>PKP524MN03B</b>	0.061	13×10 <sup>-7</sup>	0.35	6.0		<b>CVD503BR-K</b>
<b>PKP524MN07A</b>	<b>PKP524MN07B</b>	0.061	13×10 <sup>-7</sup>	0.75	1.36		<b>CVD507BR-K</b>
<b>PKP525MN03A</b>	<b>PKP525MN03B</b>	0.09	19×10 <sup>-7</sup>	0.35	6.6		<b>CVD503BR-K</b>
<b>PKP525MN07A</b>	<b>PKP525MN07B</b>	0.09	19×10 <sup>-7</sup>	0.75	1.44		<b>CVD507BR-K</b>


\*See "Drivers for 2-Phase / 5-Phase Motors" page for drivers that can be used in combination.

### Note


- Be sure to set the driver current at or below the motor rated current. If the motor rated current is exceeded, the product will be damaged.

## Speed – Torque Characteristics (Reference values) fs: Max. Starting Frequency


**PKP523MN03A/PKP523MN03B**

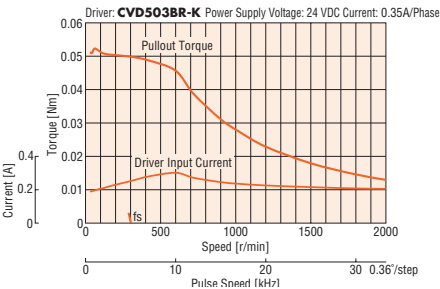


**PKP523MN07A/PKP523MN07B**

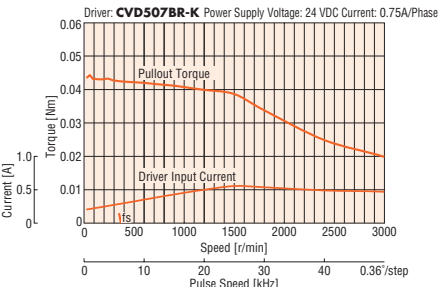


**PKP524MN03A/PKP524MN03B**

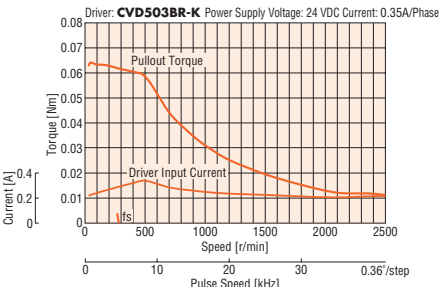


**PKP524MN07A/PKP524MN07B**

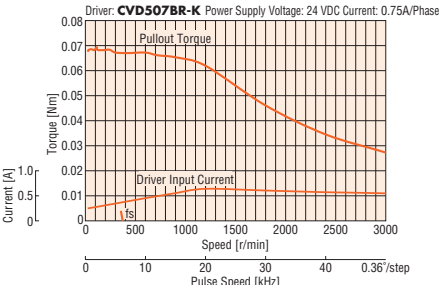

**PKP525MN03A/PKP525MN03B**

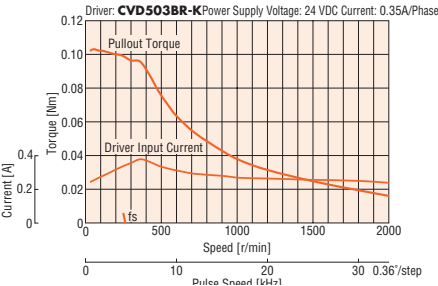

**PKP525MN07A/PKP525MN07B**

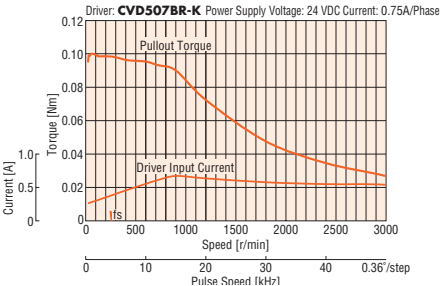

### Note


- Data for the speed – torque characteristics is based on Oriental Motor's internal measurement conditions. If the conditions are changed, the characteristics may also change as a result.
- Depending on the driving conditions, a considerable amount of heat may be generated by the motor. To protect the encoder, be sure to keep the motor case temperature at 85°C max.
- The characteristics are the same if combined with an RS-485 communication type driver.

● **Motor**

- Applicable connectors (Molex)  
Connector Housing: 51065-0500 (Molex)  
Contact: 50212-8100 (Molex)  
Crimp tool: 57176-5000 (Molex)

◇ Motor Connection Cable

Diagram illustrating the motor lead wire assembly. The assembly consists of a connector (labeled 51065-0500 (Molex)) and a motor lead wire (labeled モーターリード線 5本 UL Style 3265, AWG24). The length of the lead wire is denoted by L. The connector is shown with pins 1 and 5 labeled.



● Refer to the motor pin arrangement page for information on motor pin arrangement.

## Peripheral Equipment

- Motor  
Frame Size
- 13 mm
- 20 mm
- 28 mm
- 35 mm
- 42 mm
- 50 mm
- 51 mm
- 56.4 mm
- 60 mm
- 61 mm
- 85 mm
- 90 mm





# High Resolution Type with Encoder

## Frame Size 28 mm

### Connector Type

### Specifications

Product Name	Maximum Holding Torque Nm	Rotor Inertia J: kgm <sup>2</sup>	Rated Current A/Phase	Winding Resistance Ω/Phase	Basic Step Angle	Recommended Driver Product Name*
PKP523MN03A-R3J	0.042	9.9×10 <sup>-7</sup>	0.35	4.7	0.36°	CVD503BR-K
PKP523MN07A-R3J			0.75	1.06		CVD507BR-K
PKP524MN03A-R3J	0.061	14×10 <sup>-7</sup>	0.35	6.0		CVD503BR-K
PKP524MN07A-R3J			0.75	1.36		CVD507BR-K
PKP525MN03A-R3J	0.09	20×10 <sup>-7</sup>	0.35	6.6		CVD503BR-K
PKP525MN07A-R3J			0.75	1.44		CVD507BR-K

- A letter "L" (line driver output) indicating the encoder output circuit configuration is specified where the box  is located in the product name. For voltage output, there is no letter in the  box.
- Refer to the common specifications page for encoder specifications.


\*See "Drivers for 2-Phase / 5-Phase Motors" page for drivers that can be used in combination.

#### Note


- Be sure to set the driver current at or below the motor rated current. If the motor rated current is exceeded, the product will be damaged.

### Speed - Torque Characteristics (Reference values) fs: Max. Starting Frequency


PKP523MN03A-R3J

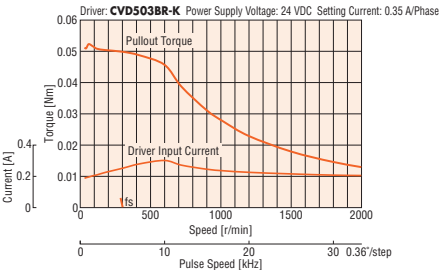


PKP523MN07A-R3J

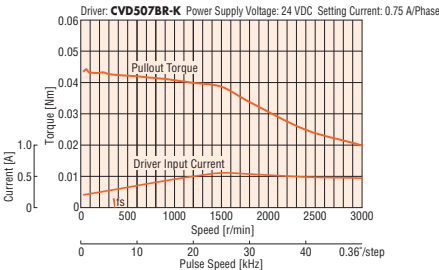


PKP524MN03A-R3J

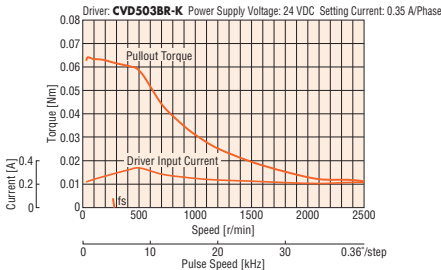


PKP524MN07A-R3J

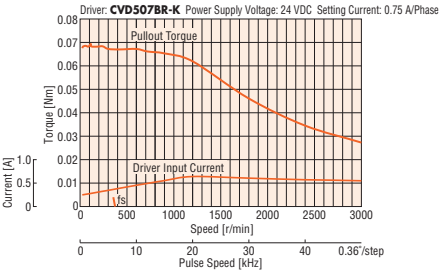

PKP525MN03A-R3J

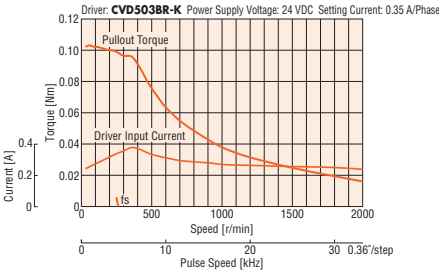

PKP525MN07A-R3J

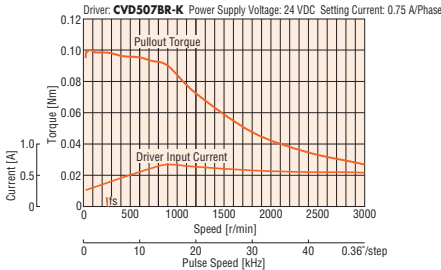

#### Note

- Data for the speed – torque characteristics is based on Oriental Motor's internal measurement conditions. If the conditions are changed, the characteristics may also change as a result.
- Depending on the driving conditions, a considerable amount of heat may be generated by the motor. To protect the encoder, be sure to keep the motor case temperature at 85°C max.
- The characteristics are the same if combined with an RS-485 communication type driver.

- A letter "L" (line driver output) indicating the encoder output circuit configuration is specified where the box  is located in the product name. For voltage output, there is no letter in the  box.



## Dimensions (Unit = mm)

### ● Motor

Product Name	L	Mass [kg]
<b>PKP523MN03A-R3J</b> <span style="background-color: #cccccc; border: 1px solid black; padding: 0 2px;"> </span>	47.5	0.13
<b>PKP523MN07A-R3J</b> <span style="background-color: #cccccc; border: 1px solid black; padding: 0 2px;"> </span>		
<b>PKP524MN03A-R3J</b> <span style="background-color: #cccccc; border: 1px solid black; padding: 0 2px;"> </span>	55.5	0.17
<b>PKP524MN07A-R3J</b> <span style="background-color: #cccccc; border: 1px solid black; padding: 0 2px;"> </span>		
<b>PKP525MN03A-R3J</b> <span style="background-color: #cccccc; border: 1px solid black; padding: 0 2px;"> </span>	67	0.22
<b>PKP525MN07A-R3J</b> <span style="background-color: #cccccc; border: 1px solid black; padding: 0 2px;"> </span>		


● Applicable Connector (Molex)

	Motor	Encoder
Connector Housing	51065-0500	51021-0800
Contact	50212-8100	50079-8100
Crimp Tool	57176-5000	57177-5000

### ● Connection Cable (Sold separately)

#### ◇ Motor Connection Cable

Product Name	Length L [m]
<b>LC5N06A</b>	0.6
<b>LC5N10A</b>	1

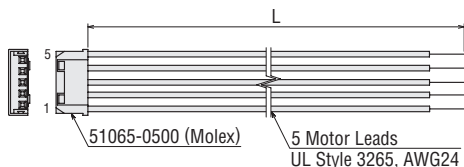

#### ◇ Encoder Connection Cable


##### ● For Voltage Output

Product Name	Length L [m]
<b>LCE05A-006</b>	0.6

##### ● For Line Driver Output

Product Name	Length L [m]
<b>LCE08A-006</b>	0.6

● Refer to the cables page for dimensions.

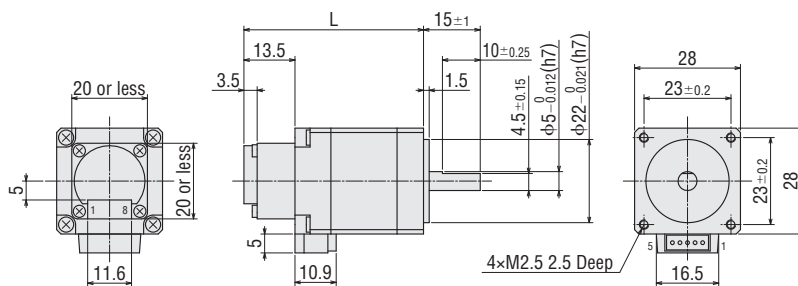

## Motor Pin Arrangement

Motor Pin Arrangement: Model B

● Refer to the motor pin arrangement page for information on motor pin arrangement.

2-Phase  
Motors  
**PKP**

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

Flat  
Type

**SH** Geared  
Type

**CS** Geared  
Type

Common  
Specifications

Inner  
Wiring  
of Motor

5-Phase  
Motors  
**PKP**

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

**TS** Geared  
Type

Common  
Specifications

Motor  
Pin  
Arrangement

Drivers for  
2-Phase/5-Phase  
Motors

Cables

Peripheral  
Equipment

● A letter "L" (line driver output) indicating the encoder output circuit configuration is specified where the box   is located in the product name. For voltage output, there is no letter in the   box.

- Motor Frame Size
- 13 mm
- 20 mm
- 28 mm
- 35 mm
- 42 mm
- 50 mm
- 51 mm
- 56.4 mm
- 60 mm
- 61 mm
- 85 mm
- 90 mm

# High-Resolution Type

## Frame Size 42 mm

### Connector Type

### Specifications

Product Name		Maximum Holding Torque Nm	Rotor Inertia J: kgm <sup>2</sup>	Rated Current A/Phase	Winding Resistance Ω/Phase	Basic Step Angle	Recommended Driver Product Name*
Single Shaft	Double Shaft						
<b>PKP544MN18A</b>	<b>PKP544MN18B</b>	0.26	$60 \times 10^{-7}$	1.8	0.51	0.36°	<b>CVD518BR-K</b>
<b>PKP546MN18A</b>	<b>PKP546MN18B</b>	0.44	$121 \times 10^{-7}$		0.66		


\*See "Drivers for 2-Phase / 5-Phase Motors" page for drivers that can be used in combination.

**Note**


- Be sure to set the driver current at or below the motor rated current. If the motor rated current is exceeded, the product will be damaged.

### Speed – Torque Characteristics (Reference values) fs: Max. Starting Frequency

**PKP544MN18A/PKP544MN18B**

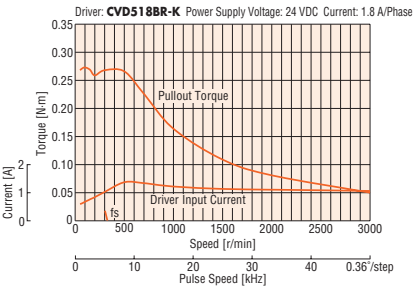

**PKP546MN18A/PKP546MN18B**

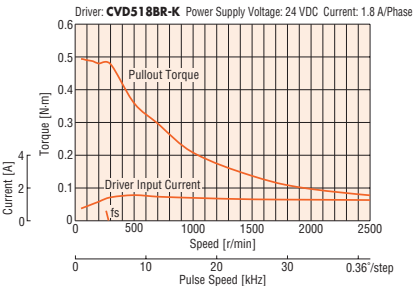

**Note**


- Data for the speed – torque characteristics is based on Oriental Motor's internal measurement conditions. If the conditions are changed, the characteristics may also change as a result.
- Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C max.
- The characteristics are the same when RS-485 communication type driver is used in combination.


### Dimensions (Unit: mm)

#### Motor

Product Name	L1	L2	Mass [kg]
<b>PKP544MN18A</b>	39	—	0.3
<b>PKP544MN18B</b>		54	
<b>PKP546MN18A</b>	59	—	0.5
<b>PKP546MN18B</b>		74	

- Applicable Connectors  
Connector Housing: 51103-0500 (Molex)  
Contact: 50351-8100 (Molex)  
Crimp Tool: 57295-5000 (Molex)

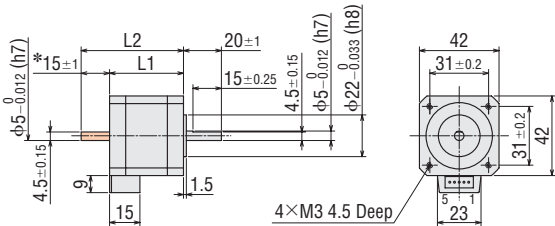

- \*The length of the shaft flat on the double shaft model is 15±0.25.
- These dimensions are for double shaft motors.  
For single shaft motors, ignore the shaded in the  areas.

### Motor Pin Assignments


Motor Pin Assignments: Model B

- Refer to the motor pin arrangement page for information on motor pin arrangement.

#### Connection Cable (Sold separately)

##### Motor Connection Cable

Product Name	Length L [m]
<b>LC5N06B</b>	0.6
<b>LC5N10B</b>	1

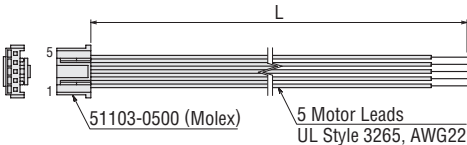

# NEW High-Resolution Type with Encoder Frame Size 42 mm

## Connector Type

### Specifications

Product Name	Maximum Holding Torque Nm	Rotor Inertia J: kgm <sup>2</sup>	Rated Current A/Phase	Winding Resistance Ω/Phase	Basic Step Angle	Recommended Driver Product Name*
<b>PKP544MN18A-R3J</b> ■	0.26	$61 \times 10^{-7}$	1.8	0.51	0.36°	<b>CVD518BR-K</b>
<b>PKP546MN18A-R3J</b> ■	0.44	$122 \times 10^{-7}$		0.66		

● A letter "L" (line driver output) indicating the encoder output circuit configuration is specified where the box ■ is located in the product name. For voltage output, there is no letter in the ■ box.

● Refer to the common specifications page for encoder specifications.


\*See "Drivers for 2-Phase / 5-Phase Motors" page for drivers that can be used in combination.

#### Note


● Be sure to set the driver current at or below the motor rated current. If the motor rated current is exceeded, the product will be damaged.

### Speed - Torque Characteristics (Reference values) fs: Max. Starting Frequency

#### PKP544MN18A-R3J■

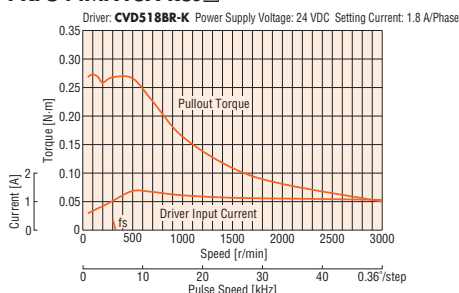

#### PKP546MN18A-R3J■

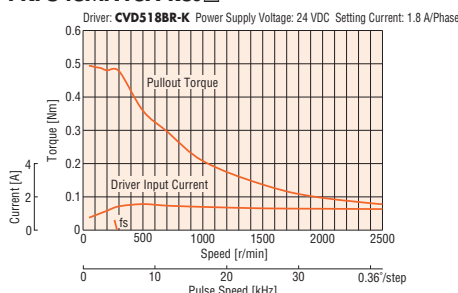

#### Note

● Data for the speed – torque characteristics is based on Oriental Motor's internal measurement conditions. If the conditions are changed, the characteristics may also change as a result.

● Depending on the driving conditions, a considerable amount of heat may be generated by the motor. To protect the encoder, be sure to keep the motor case temperature at 85°C max.

● The characteristics are the same if combined with an RS-485 communication type driver.

### Dimensions (Unit = mm)

#### Motor

Product Name	L	Mass [kg]
<b>PKP544MN18A-R3J</b> ■	52.5	0.32
<b>PKP546MN18A-R3J</b> ■	72.5	0.52


● Applicable Connector (Molex)

	Motor	Encoder
Connector Housing	51103-0500	51021-0800
Contact	50351-8100	50079-8100
Crimp Tool	57295-5000	57177-5000

#### Connection Cable (Sold separately)

##### Motor Connection Cable

Product Name	Length L [m]
<b>LC5N06B</b>	0.6
<b>LC5N10B</b>	1

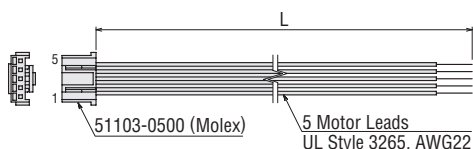

##### Encoder Connection Cable


###### For Voltage Output

Product Name	Length L [m]
<b>LCE05A-006</b>	0.6

###### For Line Driver Output

Product Name	Length L [m]
<b>LCE08A-006</b>	0.6

● Refer to the cables page for dimensions.

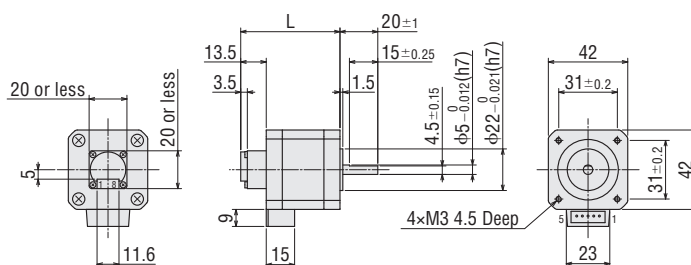

### Motor Pin Arrangement

Motor Pin Arrangement: Model B

● Refer to the motor pin arrangement page for information on motor pin arrangement.

● A letter "L" (line driver output) indicating the encoder output circuit configuration is specified where the box ■ is located in the product name. For voltage output, there is no letter in the ■ box.

2-Phase  
Motors  
PKP

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

Flat  
Type

SH Geared  
Type

CS Geared  
Type

Common  
Specifications

Inner  
Wiring  
of Motor

5-Phase  
Motors  
PKP

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

TS Geared  
Type

Common  
Specifications

Motor  
Pin  
Arrangement

Drivers for  
2-Phase/5-Phase  
Motors

Cables

Peripheral  
Equipment

- Motor Frame Size
- 13 mm
- 20 mm
- 28 mm
- 35 mm
- 42 mm
- 50 mm
- 51 mm
- 56.4 mm
- 60 mm
- 61 mm
- 85 mm
- 90 mm

# High-Resolution Type

## Frame Size 60 mm

### Connector Type

### Specifications

Product Name		Maximum Holding Torque Nm	Rotor Inertia J: kgm <sup>2</sup>	Rated Current A/Phase	Winding Resistance Ω/Phase	Basic Step Angle	Recommended Driver Product Name*
Single Shaft	Double Shaft						
<b>PKP564FMN24A</b>	<b>PKP564FMN24B</b>	0.78	$310 \times 10^{-7}$	2.4	0.32	0.36°	<b>CVD524BR-K</b>
<b>PKP566FMN24A</b>	<b>PKP566FMN24B</b>	1.25	$490 \times 10^{-7}$		0.4		
<b>PKP569FMN24A</b>	<b>PKP569FMN24B</b>	2.3	$970 \times 10^{-7}$		0.66		


\*See "Drivers for 2-Phase / 5-Phase Motors" page for drivers that can be used in combination.

#### Note


- Be sure to set the driver current at or below the motor rated current. If the motor rated current is exceeded, the product will be damaged.

### Speed – Torque Characteristics (Reference values) fs: Max. Starting Frequency


#### PKP564FMN24A/ PKP564FMN24B

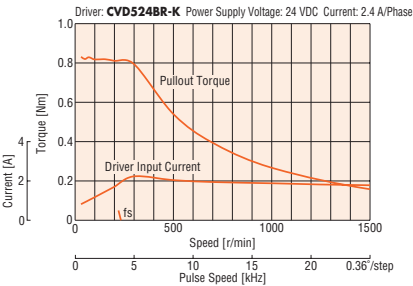

#### PKP566FMN24A/ PKP566FMN24B

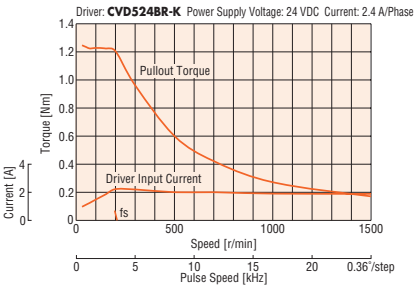

#### PKP569FMN24A/ PKP569FMN24B

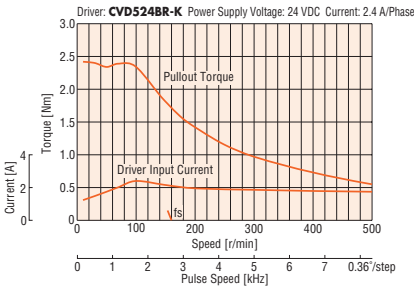

#### Note

- Data for the speed – torque characteristics is based on Oriental Motor's internal measurement conditions. If the conditions are changed, the characteristics may also change as a result.
- Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C max.
- The characteristics are the same when RS-485 communication type driver is used in combination.

### Dimensions (Unit: mm)

#### Motor


Product Name	L1	L2	L3	φD	Mass [kg]
<b>PKP564FMN24A</b>	46.5	—	7.5±0.15	8 <sup>0</sup> <sub>-0.015</sub>	0.65
<b>PKP564FMN24B</b>		69.5			
<b>PKP566FMN24A</b>		—			
<b>PKP566FMN24B</b>	56	79	9.5±0.15	10 <sup>0</sup> <sub>-0.015</sub>	0.87
<b>PKP569FMN24A</b>	87	—			
<b>PKP569FMN24B</b>		110			

#### Applicable Connectors

Connector Housing: VHR-5N (J.S.T.MFG.CO.,LTD.)

Contact: BVH-21T-P1.1 (J.S.T.MFG.CO.,LTD.)

Crimp Tool: YC-160R (J.S.T.MFG.CO.,LTD.)

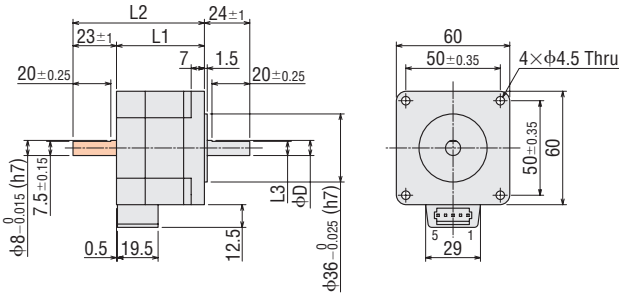

- These dimensions are for double shaft motors.  
For single shaft motors, ignore the shaded in the areas.

### Motor Pin Assignments


#### Motor Pin Assignments: Model B

- Refer to the motor pin arrangement page for information on motor pin arrangement.

#### Connection Cable (Sold separately)

#### Motor Connection Cable

Product Name	Length L [m]
<b>LC5N06C2</b>	0.6
<b>LC5N10C2</b>	1

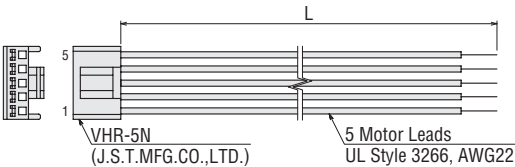

# NEW High-Resolution Type with Encoder Frame Size 60 mm

## Connector Type

### Specifications

Product Name	Maximum Holding Torque Nm	Rotor Inertia J: kgm <sup>2</sup>	Rated Current A/Phase	Winding Resistance Ω/Phase	Basic Step Angle	Recommended Driver Product Name*
<b>PKP564FMN24A-R3J</b> ■	0.78	$310 \times 10^{-7}$	2.4	0.32	0.36°	<b>CVD524BR-K</b>
<b>PKP566FMN24A-R3J</b> ■	1.25	$490 \times 10^{-7}$		0.4		
<b>PKP569FMN24A-R3J</b> ■	2.3	$970 \times 10^{-7}$		0.66		

● A letter "L" (line driver output) indicating the encoder output circuit configuration is specified where the box ■ is located in the product name. For voltage output, there is no letter in the ■ box.

● Refer to the common specifications page for encoder specifications.


\*See "Drivers for 2-Phase / 5-Phase Motors" page for drivers that can be used in combination.

#### Note


● Be sure to set the driver current at or below the motor rated current. If the motor rated current is exceeded, the product will be damaged.

### Speed - Torque Characteristics (Reference values) fs: Max. Starting Frequency


#### PKP564FMN24A-R3J■

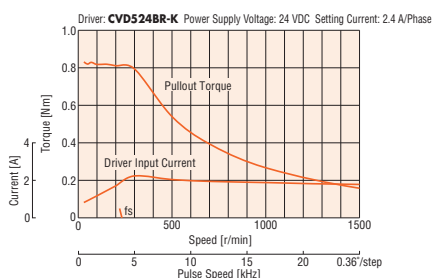

#### PKP566FMN24A-R3J■

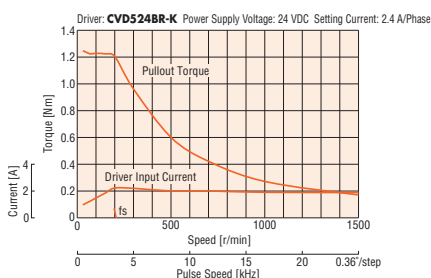

#### PKP569FMN24A-R3J■

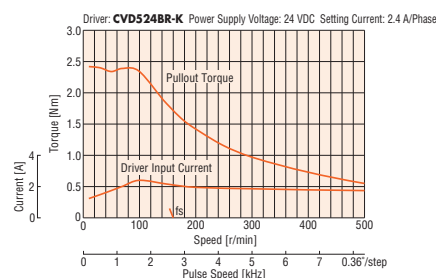

#### Note

● Data for the speed – torque characteristics is based on Oriental Motor's internal measurement conditions. If the conditions are changed, the characteristics may also change as a result.


● Depending on the driving conditions, a considerable amount of heat may be generated by the motor. To protect the encoder, be sure to keep the motor case temperature at 85°C max.

● The characteristics are the same if combined with an RS-485 communication type driver.

### Dimensions (Unit = mm)

#### ● Motor


Product Name	L1	L2	φD	Mass [kg]
<b>PKP564FMN24A-R3J</b> ■	63	7.5±0.15	8 <sup>0</sup> <sub>-0.015</sub> (h7)	0.67
<b>PKP566FMN24A-R3J</b> ■	72.5			0.89
<b>PKP569FMN24A-R3J</b> ■	103.5	9.5±0.15	10 <sup>0</sup> <sub>-0.015</sub> (h7)	1.52

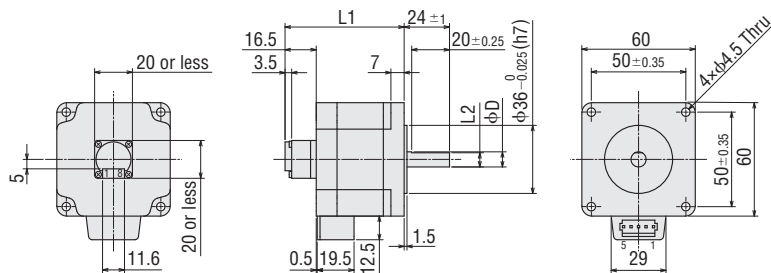

#### ● Connection Cable (Sold separately)

##### ◇ Motor Connection Cable

Product Name	Length L [m]
<b>LC5N06C2</b>	0.6
<b>LC5N10C2</b>	1

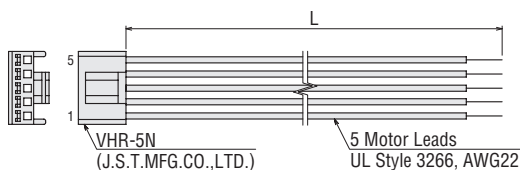

#### ● Applicable Connector (Molex)

	Motor (J.S.T.MFG.CO.,LTD.)	Encoder (Molex)
Connector Housing	VHR-5N	51021-0800
Contact	BVH-21T-P1.1	50079-8100
Crimp Tool	YC-160R	57177-5000

##### ◇ Encoder Connection Cable

#### ● For Voltage Output

Product Name	Length L [m]
<b>LCE05A-006</b>	0.6

#### ● For Line Driver Output

Product Name	Length L [m]
<b>LCE08A-006</b>	0.6

● Refer to the cables page for dimensions.

### Motor Pin Arrangement

Motor Pin Arrangement: Model B

● Refer to the motor pin arrangement page for information on motor pin arrangement.

● A letter "L" (line driver output) indicating the encoder output circuit configuration is specified where the box ■ is located in the product name. For voltage output, there is no letter in the ■ box.

2-Phase  
Motors  
PKP

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

Flat  
Type

5H Geared  
Type

CS Geared  
Type

Common  
Specifications

Inner  
Wiring  
of Motor

5-Phase  
Motors  
PKP

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

TS Geared  
Type

Common  
Specifications

Motor  
Pin  
Arrangement

Drivers for  
2-Phase/5-Phase  
Motors

Cables

Peripheral  
Equipment



# TS Geared Type

## Frame Size 60 mm

### Mini-Connector Type

## Specifications

Product Name	Maximum Holding Torque Nm	Rotor Inertia J: kgm <sup>2</sup>	Rated Current A/Phase	Winding Resistance Ω/Phase	Basic Step Angle	Gear Ratio	Permissible Torque Nm	Maximum Instantaneous Torque Nm	Speed Range r/min	Backlash arcmin	Recommended Driver Product Name*	
PKP566N28□2-TS3.6	1.8	270×10 <sup>-7</sup>	2.8	0.24	0.2°	3.6	1.8	2.5	0 — 833	35 (0.59°)	CVD528BR-K	
PKP566N28□2-TS7.2	3				0.1°	7.2	3	4.5	0 — 416	15 (0.25°)		
PKP566N28□2-TS10	4				0.072°	10	4	6	0 — 300	10 (0.17°)		
PKP564N28□2-TS20	5	140×10 <sup>-7</sup>		0.16	0.036°	20	5	8	0 — 150			
PKP564N28□2-TS30	6				0.024°	30	6	10	0 — 100			

● The box □ in the product name indicates the shaft **A** (single shaft) or **B** (double shaft).


\*See "Drivers for 2-Phase / 5-Phase Motors" page for drivers that can be used in combination.

### Note


● Be sure to set the driver current at or below the motor rated current. If the motor rated current is exceeded, the product will be damaged.

## Speed – Torque Characteristics (Reference values) fs: Max. Starting Frequency


PKP566N28A2-TS3.6/PKP566N28B2-TS3.6

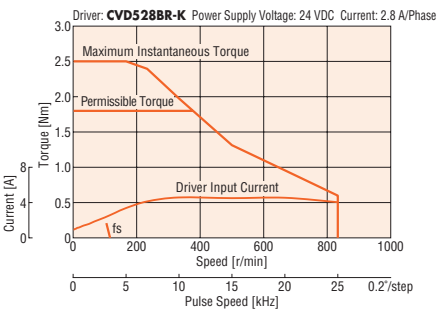


PKP566N28A2-TS7.2/PKP566N28B2-TS7.2

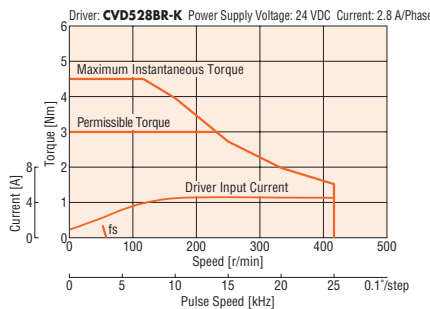


PKP566N28A2-TS10/PKP566N28B2-TS10

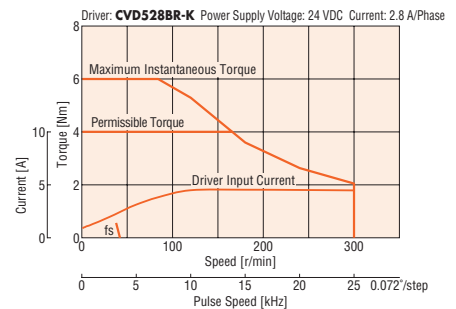

PKP564N28A2-TS20/PKP564N28B2-TS20

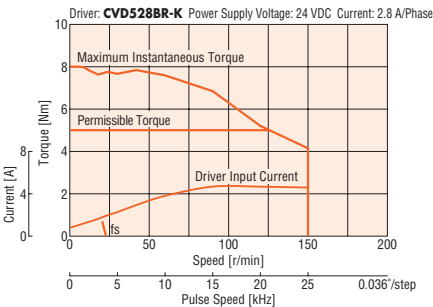

PKP564N28A2-TS30/PKP564N28B2-TS30

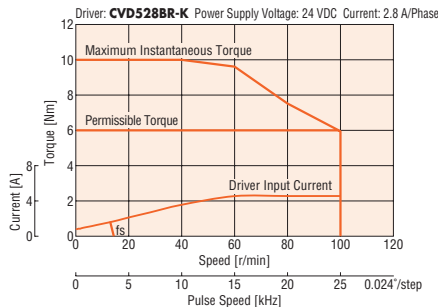

### Note

● Data for the speed – torque characteristics is based on Oriental Motor's internal measurement conditions. If the conditions are changed, the characteristics may also change as a result.

● Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C max.

● The characteristics are the same when RS-485 communication type driver is used in combination.

## Dimensions (Unit: mm)

### Motor

Product Name	Gear Ratio	L	Mass [kg]
PKP566N28A2-TS□	3.6, 7.2, 10	98	0.99
PKP566N28B2-TS□			
PKP564N28A2-TS□	20, 30	83	0.78
PKP564N28B2-TS□			

● The box □ in the product name indicates a number representing the gear ratio.

● Mounting Screw: M4×60 P0.7 (4 screws included)

● Applicable Connectors

Connector Housing: MDF97A-5S-3.5C (HIROSE ELECTRIC CO., LTD)



Contact: MDF97-22SC (HIROSE ELECTRIC CO., LTD)

Crimping Tool: HT801/MDF97-22S (HIROSE ELECTRIC CO., LTD)

### Connection Cable (Sold separately)

#### Motor Connection Cable

Product Name	Length L [m]
LC5N06E	0.6
LC5N10E	1

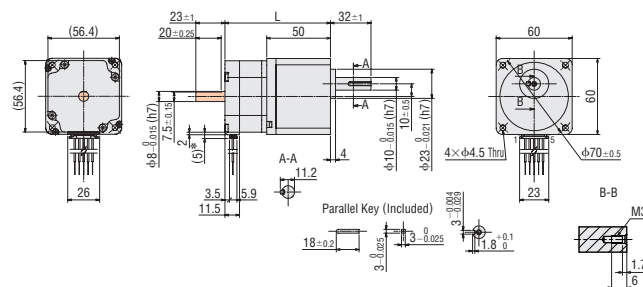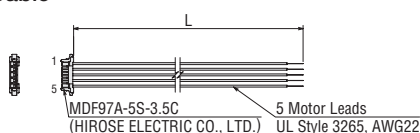

\*With connection cable

● These dimensions are for double shaft motors.

For single shaft motors, ignore the shaded in the areas.

## Motor Pin Assignments

Motor Pin Assignments: Model A

● Refer to the motor pin arrangement page for information on motor pin arrangement.

2-Phase  
Motors  
PKP

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

Flat  
Type

SH Geared  
Type

CS Geared  
Type

Common  
Specifications

Inner  
Wiring  
of Motor

5-Phase  
Motors  
PKP

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

TS Geared  
Type

Common  
Specifications

Motor  
Pin  
Arrangement

Drivers for  
2-Phase/5-Phase  
Motors

Cables

Peripheral  
Equipment



## Common Specifications

### General Specifications

Specifications		Motor
Thermal Class		130 (B)
Insulation Resistance		The measured value is 100 MΩ min. when a 500 VDC megger is applied between the windings and the case under normal ambient temperature and humidity.
Dielectric Strength		No abnormalities are observed, even when applying voltage between the windings and the case for 1 minute under normal ambient temperature and humidity with the following conditions. • <b>PK513</b> , <b>PKP52</b> , <b>PKP54</b> : 0.5 kVAC 50/60 Hz • <b>PKP56</b> : 1.0 kVAC 50/60 Hz • <b>PKP56</b> <b>FMN</b> , <b>PK59</b> : 1.5 kVAC 50/60 Hz
Operating Environment (In operation)	Ambient Temperature	−10 to +50°C (Non-freezing)
	Ambient Humidity	85% or less (Non-Condensing)
	Atmosphere	No corrosive gases or dust. The product should not be exposed to water, oil or other liquids.
Temperature Rise		Winding temperature rise 80°C max. (Based on Oriental Motor's internal measurement conditions)
Stop Position Accuracy*1		Standard Type: ±3 arcmin (±0.05°) [ <b>PK513</b> is ±10 arcmin (±0.17°)] High-Resolution Type: ±2 arcmin (±0.034°)
Shaft Runout		0.05 T.I.R (mm)*4
Radial Play*2		0.025 mm Max. (Load 5 N)
Axial Play*3		0.075 mm Max. (load 10 N) [Load for <b>PK513</b> is 1 N, load for <b>PKP52</b> is 2.5 N]
Concentricity of Installation Pilot to the Shaft		0.075 T.I.R (mm)*4
Perpendicularity of Installation Surface to the Shaft		0.075 T.I.R (mm)*4

\*1 This value is for a full step under no load. (The value changes with the size of the load.)


\*2 Radial Play: Displacement in shaft position in the radial direction when a 5 N load is applied perpendicular to the tip of the motor shaft.

\*3 Axial Play: Displacement in shaft position in the axial direction when a 10 N load (1 N for **PK513**, load for **PKP52** is 2.5 N) is applied to the motor shaft in the axial direction.

\*4 T. I. R. (Total Indicator Reading): The total dial gauge reading when the measurement section is rotated once around the reference axis center.

#### Note

- Separate the motor and driver when measuring insulation resistance or performing a dielectric voltage withstand test. Also, do not conduct these tests on the motor encoder section.






### Encoder Specifications

Encoder Product Name	R3G	R3J	R3GL	R3JL
Resolution (P/R)	500	1000	500	1000
Angular Accuracy	±0.36° (Motor output shaft conversion value)			
Output Circuit Type	Voltage Output		Line Driver*	
Output Type	Incremental			
Output Signals	A phase, B phase, Z phase (3 ch)			
Power Supply Voltage	5 VDC ±10%			
Current	45 mA max.		30 mA max.	

\*26C31 or Equivalent

### Motor Pin Arrangement

Motor Model Type	Pin Arrangement/Lead Wire Color													
Model A Mini-Connector Type	Pin No. → 5 1 	<table><tr><th>Pin No.</th><th>Lead Wire Color*</th></tr><tr><td>5</td><td>Blue</td></tr><tr><td>4</td><td>Red</td></tr><tr><td>3</td><td>Orange</td></tr><tr><td>2</td><td>Green</td></tr><tr><td>1</td><td>Black</td></tr></table>	Pin No.	Lead Wire Color*	5	Blue	4	Red	3	Orange	2	Green	1	Black
	Pin No.	Lead Wire Color*												
5	Blue													
4	Red													
3	Orange													
2	Green													
1	Black													
*The colors of the lead wires are the colors of the separately sold connection cables.														
Model B Connector Type	Pin No. → 1 5 	<table><tr><th>Pin No.</th><th>Lead Wire Color*</th></tr><tr><td>1</td><td>Blue</td></tr><tr><td>2</td><td>Red</td></tr><tr><td>3</td><td>Orange</td></tr><tr><td>4</td><td>Green</td></tr><tr><td>5</td><td>Black</td></tr></table>	Pin No.	Lead Wire Color*	1	Blue	2	Red	3	Orange	4	Green	5	Black
	Pin No.	Lead Wire Color*												
1	Blue													
2	Red													
3	Orange													
4	Green													
5	Black													
*The colors of the lead wires are the colors of the separately sold connection cables.														
Model C Lead Wire Type		<table><tr><th>Lead Wire Color</th></tr><tr><td>Blue</td></tr><tr><td>Red</td></tr><tr><td>Orange</td></tr><tr><td>Green</td></tr><tr><td>Black</td></tr></table>	Lead Wire Color	Blue	Red	Orange	Green	Black						
Lead Wire Color														
Blue														
Red														
Orange														
Green														
Black														

## Common Specifications

### Rotation Direction


This indicates the rotation direction as viewed from the output shaft side of the motor.

The rotation direction of the output gear shaft relative to the standard type motor output shaft varies depending on the gear type and gear ratio.

Please check the following table.

Geared Type		Gear Ratio	Rotation Direction of the Gear Output Shaft
<b>TS</b> Geared	Frame Size 42 mm, 60 mm	<b>3.6, 7.2, 10</b>	Same as the motor output shaft
		<b>20, 30</b>	Opposite as the motor output shaft

### Standard Type Motor

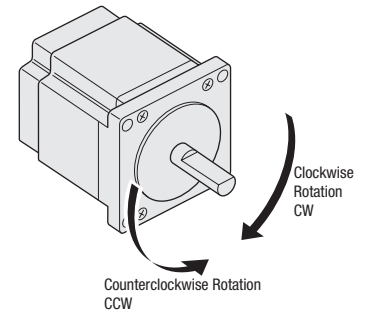


### Permissible Radial Load and Permissible Axial Load

Unit: N

Type	Motor Frame Size	Product Name	Gear Ratio	Permissible Radial Load					Permissible Axial Load
				Distance from the Tip of Motor Output Shaft [mm]					
				0	5	10	15	20	
Standard Type	20 mm	PK513	—	12	15	—	—	—	3
	28 mm	PKP523, PKP525	—	25	34	52	—	—	5
	42 mm	PKP543, PKP544□2, PKP545, PKP546□2	—	35	44	58	85	—	15
	42 mm	PKP544, PKP546	—	20	25	34	52	—	10
	56.4 mm	PKP564, PKP566, PKP568	—	90	100	130	180	270	30
	60 mm	PKP564, PKP566, PKP569	—	90	100	130	180	270	30
	85 mm	PK596, PK599, PK5913	—	260	290	340	390	480	60
High-Resolution Type	42 mm	PKP544, PKP546	—	20	25	34	52	—	10
	60 mm	PKP564, PKP566, PKP569	—	90	100	130	180	270	20
TS Geared	42 mm	PKP544	3.6, 7.2, 10	20	30	40	50	—	15
		PKP543	20, 30	40	50	60	70	—	
	60 mm	PKP566	3.6, 7.2, 10	120	135	150	165	180	40
		PKP564	20, 30	170	185	200	215	230	

### Radial Load and Axial Load

Distance from Shaft End [mm]



2-Phase  
Motors  
**PKP**

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

Flat  
Type

**SH** Geared  
Type

**CS** Geared  
Type

Common  
Specifications

Inner  
Wiring  
of Motor

5-Phase  
Motors  
**PKP**

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

**TS** Geared  
Type

Common  
Specifications

Motor  
Pin  
Arrangement

Drivers for  
2-Phase/5-Phase  
Motors


Cables

Peripheral  
Equipment

# CVD Series Driver for 2-Phase/5-Phase Stepper Motors

2-Phase Bipolar  
5-Phase  
Pulse Input

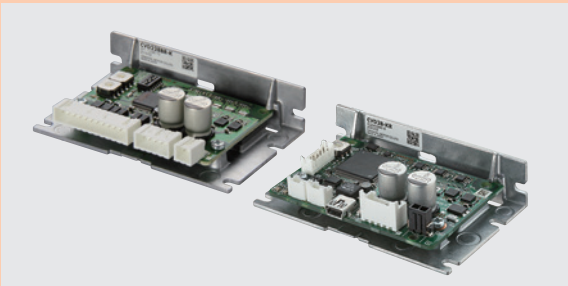



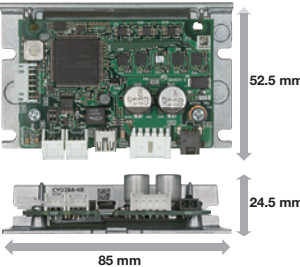


2-Phase Bipolar  
5-Phase  
RS-485 Communication



These are DC power supply input drivers for stepper motors. The bipolar driver for 2-phase stepper motors and the driver for 5-phase stepper motors are available. Using the microstep drive function for a low-vibration driver reduces vibration and noise.
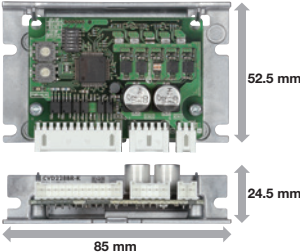
## Features and Types


- Bipolar Driver for 2-Phase Stepper Motor  
Driver for 5-Phase Stepper Motor  
**CVD Series**

Driver Type		External View	Overview	Driver Installation Direction
<div>● <b>CVD Series Pulse Input Type</b> Page 139 to 145</div> <div><p>52.5 mm</p><p>24.5 mm</p><p>85 mm</p><p>• Mass 20 g to 70 g (The value differs according to the driver type)</p></div>	Right Angle with Installation Plate	The connector points outward. 	<ul style="list-style-type: none"><li>• Can be controlled depending on the positioning module (pulse generator)</li><li>• Running current can be easily set with the digital switch</li></ul>	<ul style="list-style-type: none"><li>• Horizontal Installation</li><li>• Vertical Installation</li></ul>
	With Installation Plate	The connector points upward. 		
	Without Installation Plate	The connector points upward. 		
<div>● <b>CVD Series RS-485 Communication Type</b> Page 146 to 151</div> <div><p>52.5 mm</p><p>24.5 mm</p><p>85 mm</p><p>• Mass 65 g</p></div>	Right Angle with Installation Plate	The connector points outward. 	<ul style="list-style-type: none"><li>• Compatible with RS-485 communication (Modbus Protocol)</li><li>• Easy overwriting of data and multi-axis settings</li><li>• Reduced wiring of equipment and remote monitoring by host system possible</li><li>• Compatible with <b>MEXE02</b> support software</li></ul>	
	With Installation Plate	The connector points upward. 		

### Note

● The driver cannot be shared by both a 2-phase stepper motor and 5-phase stepper motor. Each must use its respective dedicated driver.

- For 2-Phase/5-Phase Stepper Motors  
Bipolar Driver  
**CVD Series S Type**



· SPI Communication-Compatible · Pulse Input-Compatible  
This is a compact board driver. For details, please contact your nearest Oriental Motor sales office.

- For 5-Phase Stepper Motors  
Driver  
**CVD Series SC Type**



This driver can easily control speed by sensing the speed control motor. For details, please contact your nearest Oriental Motor sales office.

# Bipolar Driver for 2-Phase Stepper Motors Driver for 5-Phase Stepper Motors CVD Series Pulse Input Type

## Product Number

**CVD 2 23 F B R - K**

① ② ③ ④ ⑤ ⑥ ⑦

①	Series Name	<b>CVD: CVD Series</b>
②	<b>2:</b> 2-Phase <b>5:</b> 5-Phase	
③	Rated Current	
④	Driver Identification	
⑤	Driver Shape	<b>B:</b> With Installation Plate Blank: Without Installation Plate
⑥	Connector Shape	<b>R:</b> Right Angle
⑦	Power Supply Input	<b>K:</b> DC Power Supply

## Product Line

We have prepared a connection cable set (sold separately) consisting of motor, power supply, and I/O signal cables. The connectors are already crimped, which makes them easy to wire without crimp tools. For details, refer to page 152.

### Bipolar Driver for 2-Phase Stepper Motors

#### ◇ Right Angle Type with Installation Plate

Product Name
<b>CVD205BR-K</b>
<b>CVD206BR-K</b>
<b>CVD215BR-K</b>
<b>CVD223BR-K</b>
<b>CVD223FBR-K</b>
<b>CVD228BR-K</b>
<b>CVD242BR-K</b>
<b>CVD245BR-K</b>

#### ◇ With Installation Plate

Product Name
<b>CVD205B-K</b>
<b>CVD206B-K</b>
<b>CVD215B-K</b>
<b>CVD223B-K</b>
<b>CVD223FB-K</b>
<b>CVD228B-K</b>
<b>CVD242B-K</b>
<b>CVD245B-K</b>

#### ◇ Without Installation Plate

Product Name
<b>CVD205-K</b>
<b>CVD206-K</b>
<b>CVD215-K</b>
<b>CVD223-K</b>
<b>CVD223F-K</b>
<b>CVD228-K</b>

### Driver for 5-Phase Stepper Motors

#### ◇ Right Angle Type with Installation Plate

Product Name
<b>CVD503BR-K</b>
<b>CVD507BR-K</b>
<b>CVD512BR-K</b>
<b>CVD514BR-K</b>
<b>CVD518BR-K</b>
<b>CVD524BR-K</b>
<b>CVD528BR-K</b>
<b>CVD538BR-K</b>

#### ◇ With Installation Plate

Product Name
<b>CVD503B-K</b>
<b>CVD507B-K</b>
<b>CVD512B-K</b>
<b>CVD514B-K</b>
<b>CVD518B-K</b>
<b>CVD524B-K</b>
<b>CVD528B-K</b>
<b>CVD538B-K</b>

#### ◇ Without Installation Plate

Product Name
<b>CVD503-K</b>
<b>CVD507-K</b>
<b>CVD512-K</b>
<b>CVD514-K</b>
<b>CVD518-K</b>
<b>CVD524-K</b>

## Included

Type	Connector for Driver Connection
Common to All Types	CN1 Connector (1 pc.), CN2 Connector (1 pc.), CN3 Connector (1 pc.)

2-Phase  
Motors  
PKP

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

Flat  
Type

**SH** Geared  
Type

**CS** Geared  
Type

Common  
Specifications

Inner  
Wiring  
of Motor

5-Phase  
Motors  
PKP

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

**TS** Geared  
Type

Common  
Specifications

Motor  
Pin  
Arrangement

Drivers for  
2-Phase/5-Phase  
Motors

Cables

Peripheral  
Equipment

## Specifications

### ● Bipolar Driver for 2-Phase Stepper Motors



Product Name		CVD205□□-K	CVD206□□-K	CVD215□□-K	CVD223□□-K CVD223F□□-K	CVD228□□-K	CVD242B□-K	CVD245B□-K
Driving Method		Microstep Drive, Bipolar, Constant Current Drive Method						
Motor Driving Current (Factory Setting)		0.5 A/Phase	0.6 A/Phase	1.5 A/Phase	2.3 A/Phase	2.8 A/Phase	4.2 A/Phase	4.5 A/Phase
Power Supply Voltage		24 VDC ± 10%						
Input Current A		0.5	0.5	1.9	2.0	3.0	3.6	3.9
Max. Input Pulse Frequency		Line driver output by programmable controller: 1 MHz (When the pulse duty is 50%) Open-collector output by programmable controller: 250 kHz (When the pulse duty is 50%) Negative Logic Pulse Input						
Operating Environment	Ambient Temperature	0 to +50°C (Non-freezing)						
	Ambient Humidity	85% or less (Non-condensing)						
	Surrounding Atmosphere	No corrosive gas or dust. No water or oil.						

### ● Driver for 5-Phase Stepper Motors



Product Name		CVD503□□-K	CVD507□□-K	CVD512□□-K	CVD514□□-K	CVD518□□-K	CVD524B□-K	CVD528B□-K	CVD538B□-K
Driving Method		Microstep Drive, Bipolar, Constant Current Drive Method							
Motor Driving Current (Factory Setting)		0.35 A/Phase	0.75 A/Phase	1.2 A/Phase	1.4 A/Phase	1.8 A/Phase	2.4 A/Phase	2.8 A/Phase	3.8 A/Phase
Power Supply Voltage		24 VDC ± 10%							
Input Current A		0.6	1.4	1.7	1.8	2.8	3.0	4.8	4.8
Max. Input Pulse Frequency		Line driver output by programmable controller: 1 MHz (When the pulse duty is 50%) Open-collector output by programmable controller: 250 kHz (When the pulse duty is 50%) Negative Logic Pulse Input							
Operating Environment	Ambient Temperature	0 to +50°C (Non-freezing)							
	Ambient Humidity	85% or less (Non-condensing)							
	Surrounding Atmosphere	No corrosive gas or dust. No water or oil.							

- For the type with a installation plate, the box □ in the product name indicates the driver shape **B** (with installation plate).
- For the right angle type with a installation plate, the box □ in the product name indicates the connector shape **R** (right angle).

## Dimensions (Unit: mm)

### ● Right Angle Type with Installation Plate

Product Name	Mass [kg]
<b>CVD205BR-K</b>	0.06
<b>CVD206BR-K</b>	
<b>CVD215BR-K</b>	
<b>CVD223BR-K</b>	
<b>CVD223FBR-K</b>	
<b>CVD228BR-K</b>	
<b>CVD503BR-K</b>	
<b>CVD507BR-K</b>	
<b>CVD512BR-K</b>	
<b>CVD514BR-K</b>	
<b>CVD518BR-K</b>	
<b>CVD524BR-K</b>	

● Included

Connector Housing: 51103-0200 (Molex)  
51103-0500 (Molex)  
51103-1200 (Molex)



Contact: 50351-8100 (Molex)

Product Name	Mass [kg]
<b>CVD242BR-K</b>	0.07
<b>CVD245BR-K</b>	
<b>CVD528BR-K</b>	
<b>CVD538BR-K</b>	

● Included

Connector Housing: 51067-0200 (Molex)  
51067-0500 (Molex)  
51103-1200 (Molex)

Contact: 50217-9101 (Molex)  
50351-8100 (Molex)

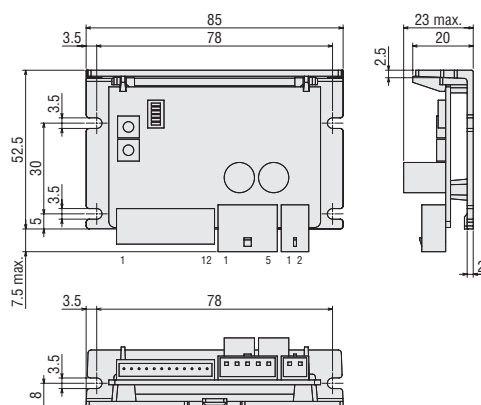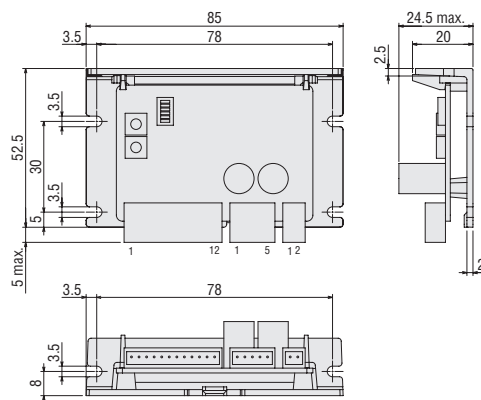

● We have prepared a connection cable set (sold separately) consisting of motor, power supply, and I/O signal cables. The connectors are already crimped, which makes them easy to wire without crimp tools. For details, refer to page 152.


### ● With Installation Plate

Product Name	Mass [kg]
<b>CVD205B-K</b>	0.06
<b>CVD206B-K</b>	
<b>CVD215B-K</b>	
<b>CVD223B-K</b>	
<b>CVD223FB-K</b>	
<b>CVD228B-K</b>	
<b>CVD503B-K</b>	
<b>CVD507B-K</b>	
<b>CVD512B-K</b>	
<b>CVD514B-K</b>	
<b>CVD518B-K</b>	
<b>CVD524B-K</b>	

● Included

Connector Housing: 51103-0200 (Molex)  
51103-0500 (Molex)  
51103-1200 (Molex)

Contact: 50351-8100 (Molex)

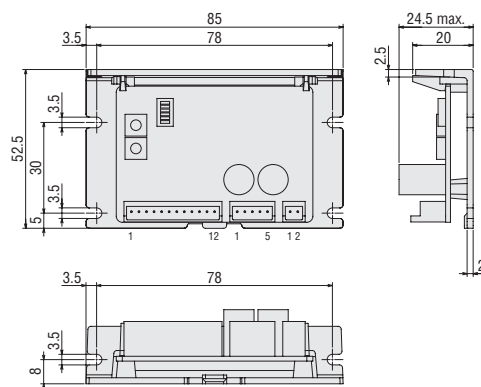


Product Name	Mass [kg]
<b>CVD242B-K</b>	0.07
<b>CVD245B-K</b>	
<b>CVD528B-K</b>	
<b>CVD538B-K</b>	

● Included

Connector Housing: 51067-0200 (Molex)  
51067-0500 (Molex)  
51103-1200 (Molex)

Contact: 50217-9101 (Molex)  
50351-8100 (Molex)

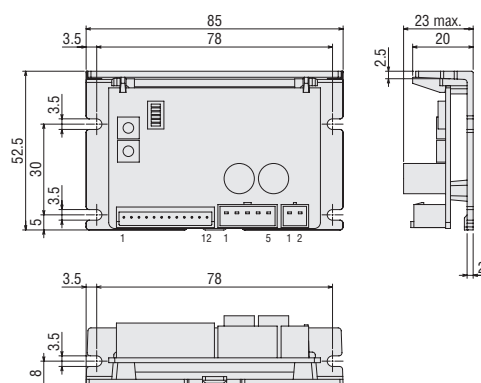

● We have prepared a connection cable set (sold separately) consisting of motor, power supply, and I/O signal cables. The connectors are already crimped, which makes them easy to wire without crimp tools. For details, refer to page 152.

2-Phase  
Motors  
**PKP**

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

Flat  
Type

**SH** Geared  
Type

**CS** Geared  
Type

Common  
Specifications

Inner  
Wiring  
of Motor

5-Phase  
Motors  
**PKP**

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

**TS** Geared  
Type

Common  
Specifications

Motor  
Pin  
Arrangement

Drivers for  
2-Phase/5-Phase  
Motors

Cables

Peripheral  
Equipment

## Without Installation Plate

Product Name	Mass [kg]
<b>CVD205-K</b>	0.02
<b>CVD206-K</b>	
<b>CVD215-K</b>	
<b>CVD223-K</b>	
<b>CVD223F-K</b>	
<b>CVD228-K</b>	
<b>CVD503-K</b>	
<b>CVD507-K</b>	
<b>CVD512-K</b>	
<b>CVD514-K</b>	
<b>CVD518-K</b>	
<b>CVD524-K</b>	

● Included


Connector Housing: 51103-0200 (Molex)

51103-0500 (Molex)

51103-1200 (Molex)

Contact: 50351-8100 (Molex)

● We have prepared a connection cable set (sold separately) consisting of motor, power supply, and I/O signal cables. The connectors are already crimped, which makes them easy to wire without crimp tools. For details, refer to page 152.

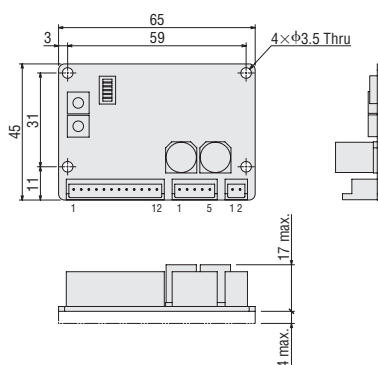

## List of Applicable Motors

### Bipolar Driver for 2-Phase Stepper Motors

Driver Product Name			Motor Drive Current	Applicable Motor	
Right Angle with Installation Plate	With Installation Plate	Without Installation Plate		Connector Type	Motor Product Name
<b>CVD205BR-K</b>	<b>CVD205B-K</b>	<b>CVD205-K</b>	0.5 A/Phase	Model C	<b>PKP21 3D</b>
<b>CVD206BR-K</b>	<b>CVD206B-K</b>	<b>CVD206-K</b>	0.6 A/Phase	Model C	<b>PKP21 4D</b>
				Model D	<b>PKP20 3D</b>
<b>CVD215BR-K</b>	<b>CVD215B-K</b>	<b>CVD215-K</b>	1.5 A/Phase	Model B	<b>PKP22 □ D, PKP23 □ D15, PKP24 □ D15</b>
				Model C	<b>PKP26 2FD</b>
<b>CVD223BR-K</b>	<b>CVD223B-K</b>	<b>CVD223-K</b>	2.3 A/Phase	Model B	<b>PKP23 □ D23, PKP24 □ D23</b>
<b>CVD223FBR-K</b>	<b>CVD223FB-K</b>	<b>CVD223F-K</b>	2.3 A/Phase	Model A	<b>PKP24 □ D</b>
<b>CVD228BR-K</b>	<b>CVD228B-K</b>	<b>CVD228-K</b>	2.8 A/Phase	Model A	<b>PKP25 □ D, PKP26 □ D14, PKP26 □ D28</b>
				Model B	<b>PKP26 □ D28</b>
<b>CVD242BR-K</b>	<b>CVD242B-K</b>	—	4.2 A/Phase	Model A	<b>PKP26 □ D42</b>
<b>CVD245BR-K</b>	<b>CVD245B-K</b>	—	4.5 A/Phase	Model C	<b>PKP29 □ D</b>

● A number indicating the length of the motor case is entered where the box □ is located within the names of the applicable motors.

● For high-resolution type, the code **M** (high-resolution type) indicating the motor type is entered where the box ■ is located within the names of the applicable motors.

● The applicable motors are listed such that the available combinations with the driver are distinguishable.

Combinations with the encoder type and geared type are also available.

For details on the product name, please see the Oriental Motor website.

#### Note

● Be sure to set the driver current at or below the motor rated current. If the motor rated current is exceeded, the product will be damaged.

### Driver for 5-Phase Stepper Motors

Driver Product Name			Motor Drive Current	Applicable Motor
Right Angle with Installation Plate	With Installation Plate	Without Installation Plate		
<b>CVD503BR-K</b>	<b>CVD503B-K</b>	<b>CVD503-K</b>	0.35 A/Phase	<b>PK51 3, PK52 □</b>
<b>CVD507BR-K</b>	<b>CVD507B-K</b>	<b>CVD507-K</b>	0.75 A/Phase	<b>PK52 □ H, PK54 □</b>
<b>CVD512BR-K</b>	<b>CVD512B-K</b>	<b>CVD512-K</b>	1.2 A/Phase	<b>PKP52 □</b>
<b>CVD514BR-K</b>	<b>CVD514B-K</b>	<b>CVD514-K</b>	1.4 A/Phase	<b>PK56 □</b>
<b>CVD518BR-K</b>	<b>CVD518B-K</b>	<b>CVD518-K</b>	1.8 A/Phase	<b>PKP54 □</b>
<b>CVD524BR-K</b>	<b>CVD524B-K</b>	<b>CVD524-K</b>	2.4 A/Phase	<b>PKP56 □ FN24, PKP56 □ FMN</b>
<b>CVD528BR-K</b>	<b>CVD528B-K</b>	—	2.8 A/Phase	<b>PKP56 □ N28, PK56 □ H, PK59 □ H</b>
<b>CVD538BR-K</b>	<b>CVD538B-K</b>	—	3.8 A/Phase	<b>PKP56 □ FN38</b>

● A number indicating the length of the motor case is entered where the box □ is located within the names of the applicable motors.

● The applicable motors are listed such that the available combinations with the driver are distinguishable.

Combinations with the encoder type and geared type are also available.

For details on the product name, please see the Oriental Motor website.

#### Note

● Be sure to set the driver current at or below the motor rated current. If the motor rated current is exceeded, the product will be damaged.



## Connection and Operation

### Names and Functions of Driver Parts

#### 1 Signal Monitor Indicators

##### LED Indicator

Indication	Color	Function	Lighting Condition
PWR/ALM	Green	Power Supply Indication	When power is applied
	Red	Alarm Indication	When a protective function is activated (blinking)

##### Alarm Contents

Blink Count	Function	Operating Condition
2	Overheat Protection	When the temperature of the driver board reaches 85°C
3	Overvoltage Protection	When the power supply voltage exceeds its permissible value When a large inertial load is stopped suddenly When a large load is hoisted
5	Overcurrent Protection	When an excessive current flows to the motor's output circuit
9	EEPROM Error	When data of the driver is damaged
Lighting	CPU Error	When the CPU driver malfunctions

#### 2 Function Setting Switch

Indication	No.	Function
1P/2P	1	Switches the pulse input mode between 1-pulse input mode and 2-pulse input mode.
OFF/SD	2	Switches the smooth drive function between enabled and disabled.
R2/R1	3	Use in combination with the step angle setting switch to set the step angle.
STOP	4	Switches the standstill current of motors to 25% or 50%.
OFF/FIL	5	Switches the command filter between enabled and disabled.
—	6	Not used.

#### 3 Step Angle Setting Switch

Indication	Function
STEP	Use in combination with the R2/R1 switch to set the step angle.


Step Angle Setting Switch (STEP) Scale	R2/R1 Switch: When Set to ON (R1)		R2/R1 Switch: When Set to OFF (R2)	
	Resolution (P/R)	Step Angle	Resolution (P/R)	Step Angle
0	500	0.72°	200	1.8°
1	1000	0.36°	400	0.9°
2	1250	0.288°	800	0.45°
3	2000	0.18°	1000	0.36°
4	2500	0.144°	1600	0.225°
5	4000	0.09°	2000	0.18°
6	5000	0.072°	3200	0.1125°
7	10000	0.036°	5000	0.072°
8	12500	0.0288°	6400	0.05625°
9	20000	0.018°	10000	0.036°
A	25000	0.0144°	12800	0.028125°
B	40000	0.009°	20000	0.018°
C	50000	0.0072°	25000	0.0144°
D	62500	0.00576°	25600	0.0140625°
E	100000	0.0036°	50000	0.0072°
F	125000	0.00288°	51200	0.00703125°

#### 4 Running Current Setting Switch


Indication	Function
RUN	Sets the motor running current.

#### 5 I/O Signal Connector

Indication	Pin No.	I/O	Signal Name	Function
CN3	1	Input	CW+ (PLS+)	Rotates the motor in the CW direction. (Operation command pulse signal when in 1-pulse input mode)
	2		CW- (PLS-)	
	3		CCW+ (DIR+)	Rotates the motor in the CCW direction. (Rotation direction signal when in 1-pulse input mode)
	4		CCW- (DIR-)	
	5		AWO+	Stop motor excitation.
	6		AWO-	
	7	Output	CS+	Switches the step angle.
	8		CS-	
	9		ALM+	Outputs the alarm status for the driver (normally closed).
	10		ALM-	
	11		TIM+	Output when the state of excitation of the motor is the excitation home position.
	12		TIM-	

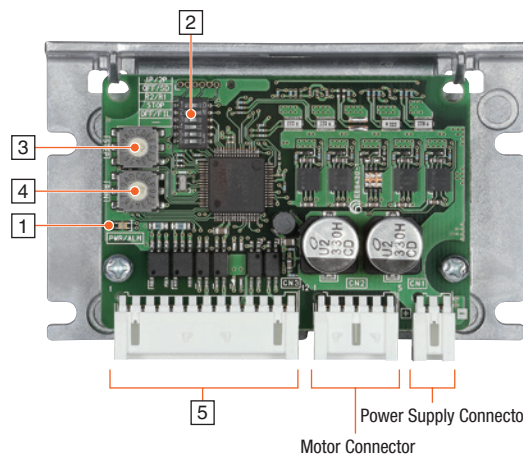

● Difference in the Motor Responsiveness Depending on the Command Filter (OFF/FIL Switch)

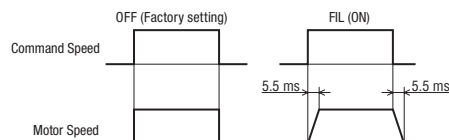

● Compared to the standard type, the high-resolution type has 2 times the resolution and 1/2 the step angle.

Example: When the R2/R1 switch is set to ON (R1) and the STEP switch is set to "0"

Resolution of High-Resolution Type:  $500 \times 2 = 1000$

Step Angle of High-Resolution Type:  $0.72^\circ / 2 = 0.36^\circ$

● With the geared types, the actual step angle is the value obtained by dividing the step angle by the gear ratio.

2-Phase  
Motors  
PKP

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

Flat  
Type

5H Geared  
Type

CS Geared  
Type

Common  
Specifications

Inner  
Wiring  
of Motor

5-Phase  
Motors  
PKP

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

TS Geared  
Type

Common  
Specifications

Motor  
Pin  
Arrangement


Drivers for  
2-Phase/5-Phase  
Motors

Cables

Peripheral  
Equipment

## Connection Diagrams

- When the Input Signal Voltage is 5 VDC
- ◇ When the pulse input is the line driver

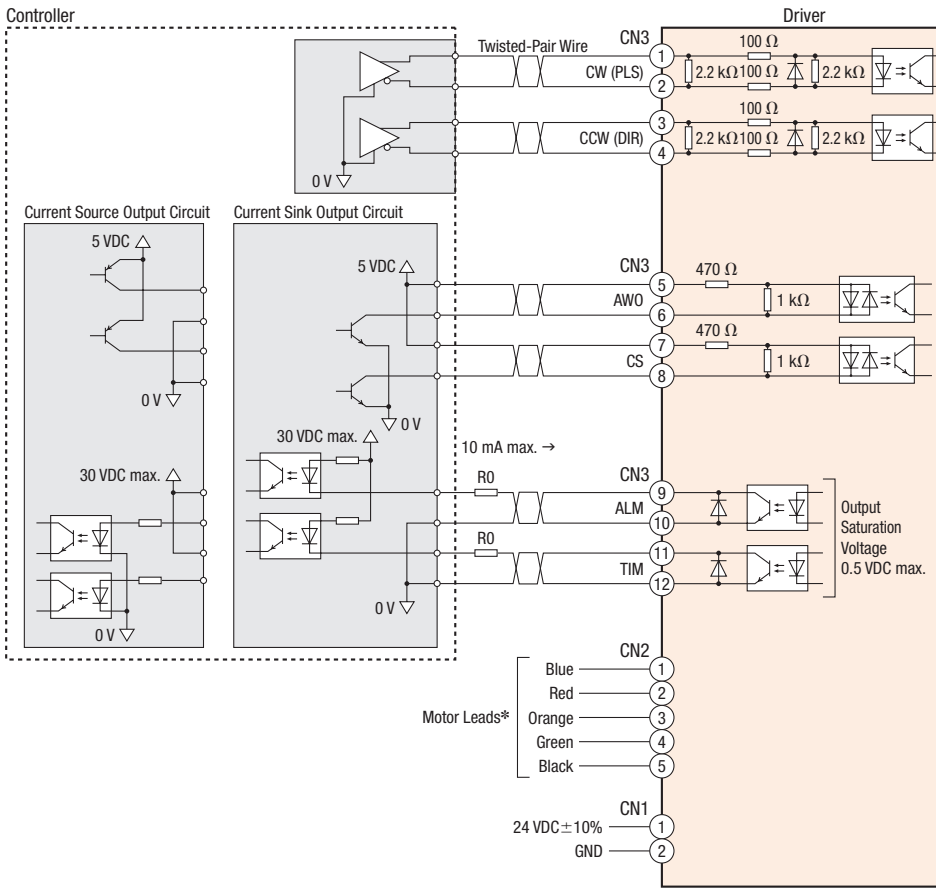


\*The pin arrangement of the connector differs depending on the motor. See the connection table below for details.

### ◇ Connection Table of 2-Phase CVD Drivers

- Motor: 2-Phase **PKP/PK** Series Bipolar 4 Lead Wires
- Driver: Bipolar Driver for 2-Phase Stepper Motors


Model A

Pin No. → 5 1




Model B

Pin No. → 1 6




Model C



Model D

Pin No. → 4 1



Driver CN2 Pin No.	Model A		Model B		Model C	Model D	
	Pin No.	Color	Pin No.	Color	Color	Pin No.	Color
1	4	Blue	1	Blue	Blue	3	Blue
2	5	Red	3	Red	Red	4	Red
3	—	—	—	—	—	—	—
4	2	Green	6	Green	Green	2	Green
5	1	Black	4	Black	Black	1	Black

● The colors in the table represent colors of the lead wires of the connection cables sold separately.

#### Note

- The pin arrangement varies depending on the model. It will not rotate normally if the connection is wrong.

### ◇ Connection Table of 5-Phase CVD Drivers

- Motor: 5-Phase **PKP/PK** Series
- Driver: Driver for 5-Phase Stepper Motors

Model A


Model B

Model C

Driver CN2 Pin No.	Model A		Model B		Model C
	Pin No.	Color	Pin No.	Color	Color
1	5	Blue	1	Blue	Blue
2	4	Red	2	Red	Red
3	3	Orange	3	Orange	Orange
4	2	Green	4	Green	Green
5	1	Black	5	Black	Black


● The colors in the table represent colors of the lead wires of the connection cables sold separately.

### ◇ When the pulse input is open collector

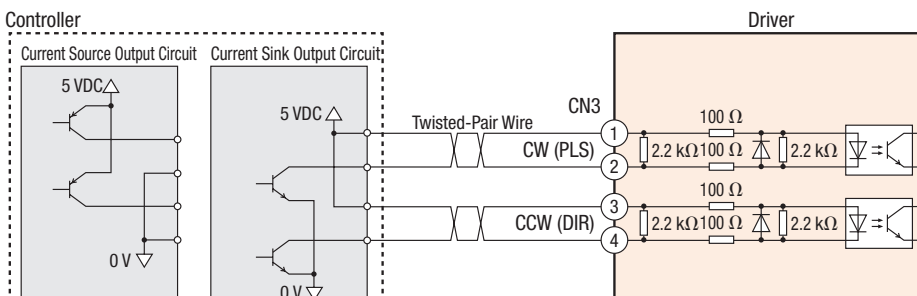

● When the Input Signal Voltage is 24 VDC

◇ When the pulse input is open collector

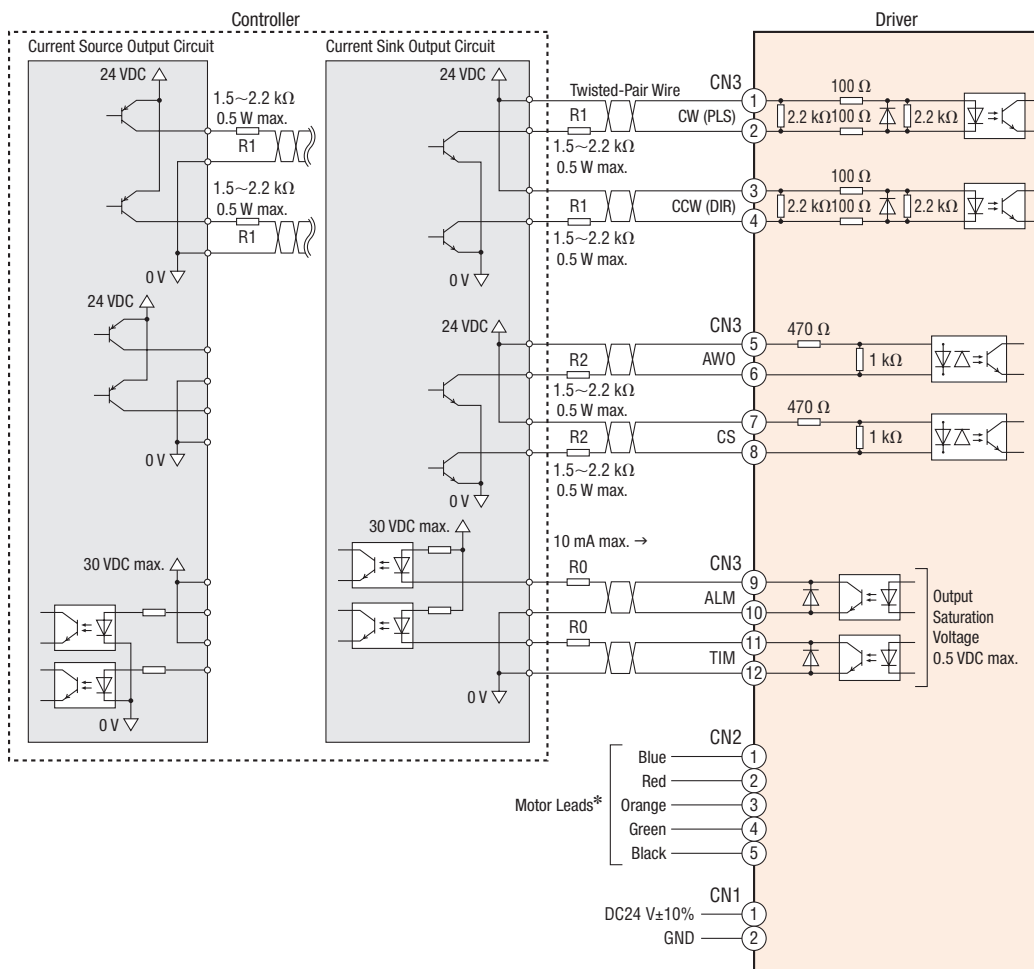

\*The pin arrangement of the connector differs depending on the motor. See the connection table on page 151 for details.

## [Notes on Wiring]

### ◇ I/O Signal Connection

#### ● Input signal

- Use 5 VDC for the CW input and CCW input signals. If voltage exceeding 5 VDC is applied, connect an external resistor R1 so that the current becomes 7 - 20 mA.  
Example: When connecting to 24 VDC, R1 should be 1.5 - 2.2 kΩ, 0.5 W or more
- Use 5 VDC for the AWO input and CS input signals. If voltage exceeding 5 VDC is applied, connect an external resistor R2 so that the current becomes 5 - 15 mA.  
Example: When connecting to 24 VDC, R2 should be 1.5 - 2.2 kΩ, 0.5 W or more

#### ● Output signal

- Use output signals at 30 VDC 10 mA max. When the current value exceeds 10 mA, connect an external resistor R0.
- Either a twisted-pair wire or shielded wire is recommended for the I/O signal cable.
- Note that as the length of the pulse line increases, the max. transmission frequency decreases, and keep the wiring length as short as possible (2 m max.).
- Provide a distance of 100 mm min. between the signal lines and power lines (such as power supply lines and motor lines).

### ◇ Power Supply Connection

- Incorrect polarities of the DC power-supply input will damage the driver. Make sure that the polarity is correct before turning the power on.

### ◇ Motor Cable Extension

- Up to 3 cables can be connected between the motor and driver.
- Maximum extension length is 10 m. (5 m for **CVD242**, **CVD528** or **CVD538**.)

### ◇ General

- A separate hand crimp tool is required to crimp the connector and lead wires included with the driver. Connection cable sets which are available as accessories (sold separately) have already had their lead wires crimped.
- If a specific wiring and layout causes the motor cable or power supply cable to generate a noise problem, shield the cable or use ferrite cores.

## 2-Phase Motors PKP

### Features Product Line

### Product Number Product Line

### Standard Type

### High-Resolution Type

### Flat Type

### SH Geared Type

### CS Geared Type

### Common Specifications

### Inner Wiring of Motor

## 5-Phase Motors PKP

### Features Product Line

### Product Number Product Line

### Standard Type

### High-Resolution Type

### TS Geared Type

### Common Specifications

### Motor Pin Arrangement

## Drivers for 2-Phase/5-Phase Motors

### Cables

### Peripheral Equipment

# Bipolar Driver for 2-Phase Stepper Motors Driver for 5-Phase Stepper Motors CVD Series RS-485 Communication Type

## Product Number

**CVD 2 B R - K R**

① ② ③ ④ ⑤ ⑥

①	Series Name	<b>CVD: CVD Series</b>
②	<b>2:</b> 2-Phase <b>5:</b> 5-Phase	
③	Driver Configuration	<b>B:</b> With an Installation Plate
④	Connector Configuration	<b>R:</b> Right Angle
⑤	Power Supply Input	<b>K:</b> DC Power Supply
⑥	Product Line	<b>R:</b> RS-485 Communication Type

## Product Line

Motor cables, power supply and I/O signal cables, and RS-485 communication cables (sold separately) are available. The connectors are already crimped, so they can be easily wired without the need for a crimp tool. Refer to page 152 for details.

### ● Bipolar Driver for 2-Phase Stepper Motors

#### ◇ Right Angle Type with Installation Plate

Product Name
<b>CVD2BR-KR</b>

#### ◇ With Installation Plate

Product Name
<b>CVD2B-KR</b>

### ● Driver for 5-Phase Stepper Motors

#### ◇ Right Angle Type with Installation Plate

Product Name
<b>CVD5BR-KR</b>

#### ◇ With Installation Plate

Product Name
<b>CVD5B-KR</b>

## Specifications



Driver Product Name		<b>CVD2B□-KR</b>	<b>CVD5B□-KR</b>
Drive Method		Microstep Drive, Bipolar Constant Current Drive Method	
Power Supply Voltage		24 VDC±10%	
Input Current*		A	
		0.5 - 3.0	0.6 - 3.0
Interface	Control Input	7 points, Photocoupler	
	Control Output	2 points, Photocoupler and Open-Collector	
	Field Network	Modbus RTU (RS-485 communication)	
Operating Environment (In operation)	Ambient Temperature	0 - +50°C (Non-freezing)	
	Ambient Humidity	85% or less (Non-condensing)	
	Atmosphere	No corrosive gases or dust. The product should not be exposed to water, oil or other liquids.	

● For the right angle type with installation plate, an **R** (right angle) indicating the connector configuration is specified where the □ box is located in the driver product name.

\*Varies depending on the combined motor. Refer to page 147.

## RS-485 Communication Specifications

Electrical Characteristics	Complies with EIA-485. Use twisted-pair wire. The max. total extension length is 10 m.
Communication Mode	Half duplex and start-stop synchronization (Data: 8 bits, stop bit: 1 bit or 2 bits, parity: none, even, or odd)
Baud Rate	9,600 bps, 19,200 bps, 38,400 bps, 57,600 bps, 115,200 bps, and 230,400 bps are available
Protocol	Modbus RTU mode
Connection Type	Up to 31 units can be connected to a single host system.

## ■ Dimensions (Unit: mm)

### ● Right Angle Type with Installation Plate

Product Name	Mass [kg]
<b>CVD2BR-KR</b>	0.065
<b>CVD5BR-KR</b>	

#### ● Applicable Connector (Molex)

##### Power Connector (CN1)

Connector Housing: 43645-0200 (Molex)

Contact: 43030-0001 (Molex)

##### Motor Connector (CN2)

Connector Housing: 51103-0500 (Molex)

Contact: 50351-8100 (Molex)

##### RS-485 Communication Connector (CN4, CN5)



Connector Housing: PAP-03V-S (J.S.T.MFG.CO.,LTD.)

Contact: SPHD-001T-P0.5 or SPHD-002T-P0.5  
(J.S.T.MFG.CO.,LTD.)

##### I/O signal connector (CN6)

Connector Housing: PHDR-12VS (J.S.T.MFG.CO.,LTD.)

Contact: SPHD-001T-P0.5 (J.S.T.MFG.CO.,LTD.)


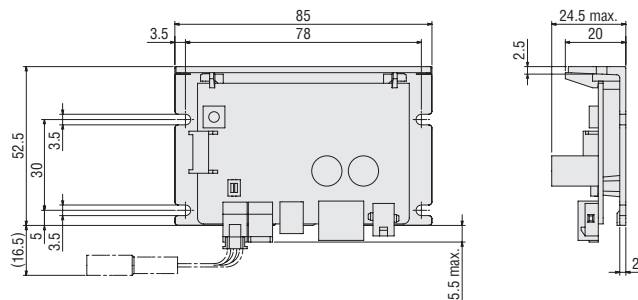


### ● With Installation Plate

Product Name	Mass [kg]
<b>CVD2B-KR</b>	0.065
<b>CVD5B-KR</b>	

#### ● Applicable Connector (Molex)

Same as the right angle with installation plate.

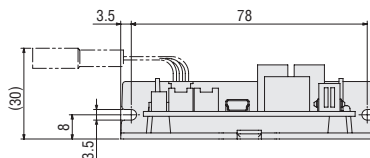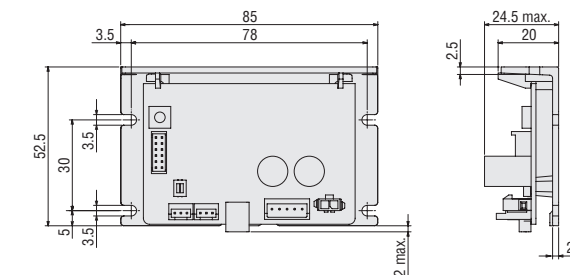

● Motor cables, power supply and I/O signal cables, and RS-485 communication cables (sold separately) are available. The connectors are already crimped, so they can be easily wired without the need for a crimp tool. Refer to page 163 for details.

## ■ List of Applicable Motors

### ● Driver for 2-Phase Stepper Motors

Driver Product Name		Motor Drive Current	Input Current A	Applicable Motor
Right Angle with Installation Plate	With Installation Plate			
<b>CVD2BR-KR</b>	<b>CVD2B-KR</b>	0.5 A/Phase	0.5	<b>PKP213D05</b> □
		0.6 A/Phase	0.5	<b>PKP203D06</b> □, <b>PKP214D06</b> □
		0.85 A/Phase	0.8	<b>PKP24</b> □ <b>D08</b> □ <b>2</b>
		1.4 A/Phase	1.3	<b>PKP26</b> □ <b>D14</b> □ <b>2</b>
		1.5 A/Phase	1.9	<b>PKP22</b> □ <b>D15</b> □, <b>PKP22</b> □ <b>MD15</b> □, <b>PKP22</b> □ <b>D15</b> □ <b>2</b> , <b>PKP23</b> □ <b>D15</b> □, <b>PKP24</b> □ <b>D15</b> □, <b>PKP24</b> □ <b>MD15</b> □, <b>PKP262FD15A</b>
			1.4	<b>PKP24</b> □ <b>D15</b> □ <b>2</b> , <b>PKP24</b> □ <b>MD15</b> □ <b>2</b>
		2.3 A/Phase	2.0	<b>PKP23</b> □ <b>D23</b> □, <b>PKP24</b> □ <b>D23</b> □ <b>2</b> , <b>PKP24</b> □ <b>D23</b> □
		2.8 A/Phase	3.0	<b>PKP25</b> □ <b>D28</b> □ <b>A2</b> , <b>PKP26</b> □ <b>D28</b> □ <b>2</b> , <b>PKP26</b> □ <b>D28</b> □, <b>PKP26</b> □ <b>MD28</b> □ <b>2</b> , <b>PKP26</b> □ <b>MD28</b> □

### ● Driver for 5-Phase Stepper Motors

Driver Product Name		Motor Drive Current	Input Current A	Applicable Motor
Right Angle with Installation Plate	With Installation Plate			
<b>CVD5BR-KR</b>	<b>CVD5B-KR</b>	0.35 A/Phase	0.6	<b>PK513</b> , <b>PK52</b> □ <b>P</b>
		0.75 A/Phase	1.4	<b>PK52</b> □ <b>H</b> , <b>PK54</b> □
		1.2 A/Phase	1.7	<b>PKP52</b> □
		1.4 A/Phase	1.8	<b>PK56</b> □
		1.8 A/Phase	2.8	<b>PKP54</b> □ <b>N18</b> □ <b>2</b> , <b>PKP54</b> □ <b>N18</b> □, <b>PKP54</b> □ <b>MN</b>
		2.4 A/Phase	3.0	<b>PKP56</b> □ <b>FN24</b> □ <b>2</b> , <b>PKP56</b> □ <b>FMN</b>

● A number indicating the length of the motor case is entered where the box □ is located within the names of the applicable motors.

● Either **A** (single shaft) or **B** (double shaft) indicating the configuration is specified where the box □ is located in the names of the applicable motors.

● The applicable motors are listed such that the available combinations with the driver are distinguishable.

Combinations with the encoder type and geared type are also available.

For details on the product name, please see the Oriental Motor website.

#### Note

● Be sure to set the driver current at or below the motor rated current. If the motor rated current is exceeded, the product will be damaged.

#### 2-Phase

#### Motors

#### PKP

#### Features Product Line

#### Product Number Product Line

#### Standard Type

#### High- Resolution Type

#### Flat Type

#### SH Geared Type

#### CS Geared Type

#### Common Specifications

#### Inner Wiring of Motor

#### 5-Phase

#### Motors

#### PKP

#### Features Product Line

#### Product Number Product Line

#### Standard Type

#### High- Resolution Type

#### TS Geared Type

#### Common Specifications

#### Motor Pin Arrangement

#### Drivers for 2-Phase/5-Phase Motors

#### Cables

#### Peripheral Equipment

## Connection and Operation

### Names and Functions of Driver Parts

#### 1 Signal Monitor Indicators

##### ◇ LED Indicators

Indication	Color	Function	Lighting Condition
PWR/ALM	Green	Power Supply Indication	When power is applied
	Red	Alarm Indication	When a protective function is activated (blinking)
C-DAT/C-ERR	Green	Communication Indication	When communication data is being sent or received
	Red	Communication Error Indication	When communication data is in error

#### 2 Terminating Resistor Setting Switch

Indication	No.	Function
SW2	1	Set the RS-485 communication terminating resistor (120 Ω)
	2	(factory setting: OFF for both No.1 and No.2).

#### 3 Motor Setting Switch

Indication	Function
SW1	Set the applicable motor (factory setting: 0).

#### 4 USB Communication Connector (CN3)


##### ◇ USB Communication Cable Specifications

Specifications	USB 2.0 (Full speed)
Cables	Length: 3 m or less
	Configuration: A to mini B

#### 5 RS-485 Communication Connector (CN4, CN5)

Connect when controlling with RS-485 communication. If connecting multiple drivers, connect the RS-485 communication cable (sold separately) to either the CN4 or CN5 connector. Another driver can be connected to the open connectors.


Internal Input Circuit

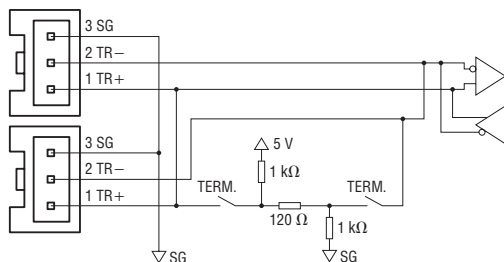


Pin No.	Signal Name	Description
1	TR+	RS-485 Communication Signal (+)
2	TR-	RS-485 Communication Signal (-)
3	SG	Signal GND

#### 6 I/O Signal Connector (CN6)

Indication	Pin No.	Signal Name	Description
CN6	1	IN-COM	Input Common
	2	IN0	Control Input 0 [FW-POS] Execute continuous operation in the FWD direction.
	3	IN1	Control Input 1 [RV-POS] Execute continuous operation in the RVS direction.
	4	IN2	Control Input 2 [STOP] Stop the motor.
	5	IN3	Control Input 3 [ALM-RST] Reset the alarms.
	6	IN4	Control Input 4 [HOMES] The signal input from the mechanical home sensor.
	7	IN5	Control Input 5 [FW-LS] The signal input from the FWD direction limit sensor.
	8	IN6	Control Input 6 [RV-LS] The signal input from the RVS direction limit sensor.
	9	OUT0	Control Output 0 [ALM-B] Output the alarm status for the driver (B contact).
	10	OUT1	Control Output 1 [TIM] Output each time the motor output shaft rotates 7.2° from home.
	11	OUT-COM	Output Common
	12	N.C.	N.C.

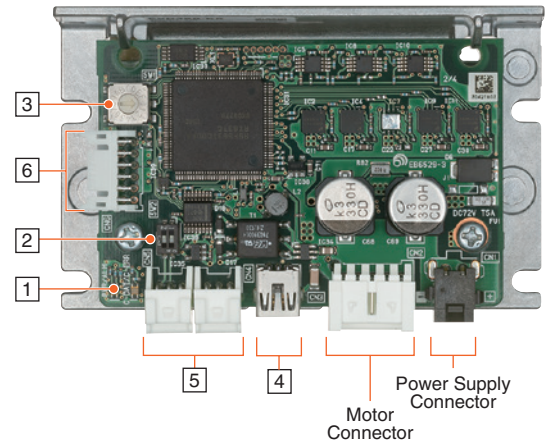

RS-485  
Communication  
Wire

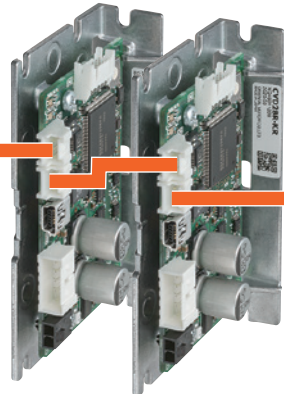

## Alarm Contents

Blink Count	Function	Operating Condition
5	Overcurrent Protection	When an excessive current flows to the motor's output circuit
2	Main Circuit Overheat Protection	When the temperature of the driver board reaches 85°C
3	Overvoltage Protection	When the power supply voltage exceeds its permissible value When a large inertial load is stopped suddenly When a large load is hoisted
3	Undervoltage	When the power supply suddenly shuts down or the voltage is insufficient
2	Command Pulse Error	When the command pulse frequency exceeds the specification value
9	EEPROM Error	When data of the driver is damaged
7	Return-to-Home Not Completed	When absolute positioning operation starts with the coordinates not fixed
7	±LS Simultaneous Input	Both FW-LS input and RV-LS input are detected when there is an alarm for the "FW-LS/RV-LS input operation" parameter Return-to-home operation executed when both FW-LS input and RV-LS input are detected
7	±LS Reverse Connection	When a reverse LS input to the operation direction is detected during return-to-home operation in either 3-sensor mode or 2-sensor mode
7	Return-to-Home Operation Error	When the FW-LS and RV-LS sensor and the HOME sensor are installed near one another When the HOME sensor is exceeded during a deceleration stop during return-to-home operation in 1-direction rotation mode
7	HOMES Not Detected	When HOMES input is not detected between the FW-LS input and RV-LS input during return-to-home operation in 3-sensor mode
7	TIM, SLIT Signal Error	When TIM output and SLIT input cannot be detected during return-to-home operation
7	Hardware Overtravel	Either FW-LS input or RV-LS input is detected when there is an alarm for the "FW-LS/RV-LS input operation" parameter
7	Software Overtravel	When the software limit is reached when there is an alarm for the "Software overtravel" parameter
7	Return-to-Home Operation Offset Error	When either FW-LS input or RV-LS is detected during offset traveling during return-to-home operation
7	Operating Data Error	When a positioning SD operation is executed with operating speed 0 data
7	RS-485 Communication Error	When a set number of consecutive errors occurs with the "Communication error alarm" parameter in RS-485 communication
7	RS-485 Communication Timeout	When there is no communication with the host system even when the set time in the "Communication timeout" parameter has elapsed
Lit up	CPU Error	When the CPU driver malfunctions

2-Phase  
Motors  
**PKP**

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

Flat  
Type

**SH** Geared  
Type

**CS** Geared  
Type

Common  
Specifications

Inner  
Wiring  
of Motor

5-Phase  
Motors  
**PKP**

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

**TS** Geared  
Type

Common  
Specifications

Motor  
Pin  
Arrangement

Drivers for  
2-Phase/5-Phase  
Motors


Cables

Peripheral  
Equipment




## Connection Diagrams

### ◇ Connection with Current Sink Output Circuit

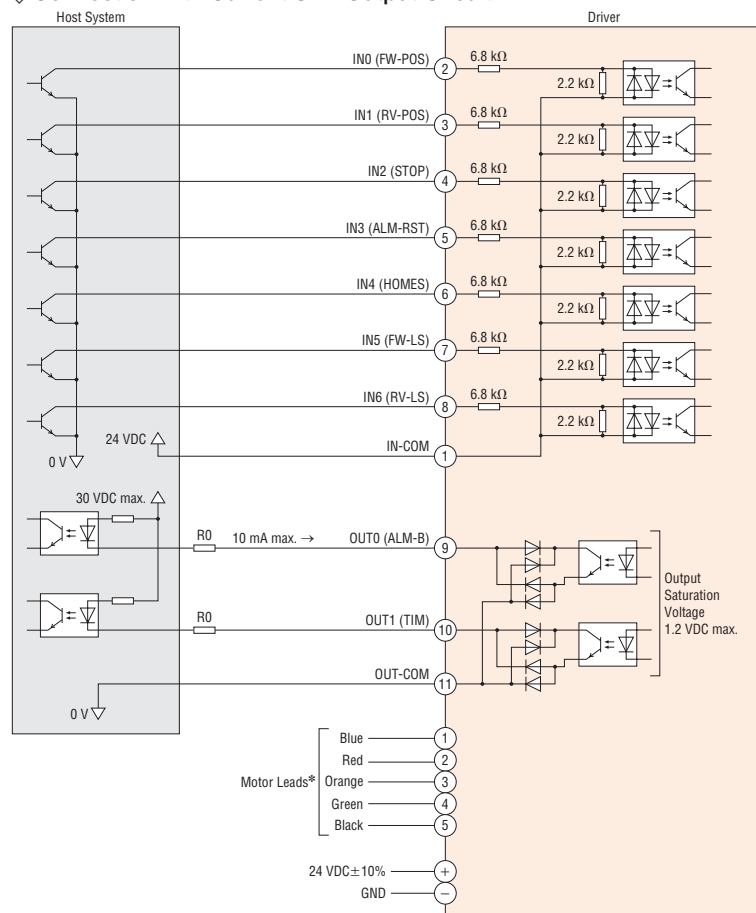

\*The connector pin arrangement varies depending on the motor. Refer to the connection table on page 151 for details.

### ◇ Connection with Current Source Output Circuit

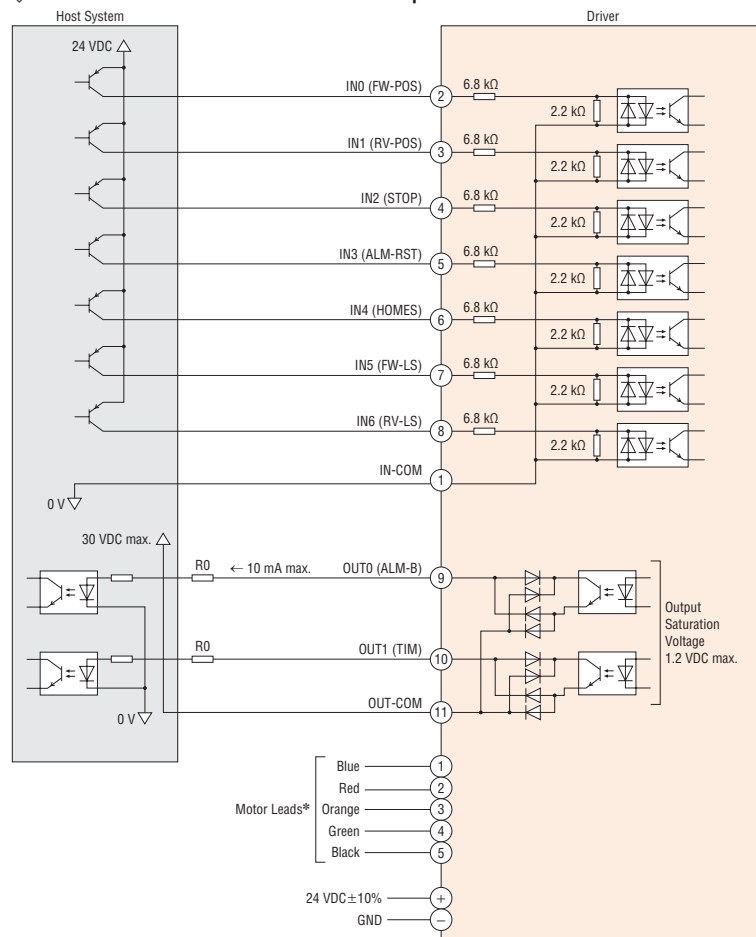

\*The connector pin arrangement varies depending on the motor. Refer to the connection table on page 151 for details.

### [Notes on Wiring]

#### ◇ I/O Signal Connection

- Output Signals  
Use output signals at 30 VDC 10 mA max. When the current value exceeds 10 mA, connect an external resistor R0.
- Either a twisted-pair wire or shielded wire is recommended for the I/O signal cable.
- Keep the cable as short as possible (under 2 m) to suppress the effects of noise.
- Provide a distance of 100 mm min. between the signal lines and power lines (such as power supply lines and motor lines).

#### ◇ Power Supply Connection

- Incorrect polarities of the DC power-supply input will damage the driver.  
Make sure that the polarity is correct before turning the power on.

#### ◇ Motor Connection


- Up to three cables can be used to connect the motor and driver.
- The maximum extension length is 10 m.

#### ◇ General

- A separate hand crimp tool is required to crimp the connector and lead wires included with the driver. The separately sold connection cables have already had their lead wires crimped.
- If a specific wiring and layout causes the motor cable or power supply cable to generate a noise problem, shield the cable or use ferrite cores.

## ◇ 2-Phase **CVD** Driver Connection Table

- Motor: 2-Phase **PKP/PK** Series Bipolar 4 Lead Wires
- Driver: Bipolar Driver for 2-Phase Stepper Motors

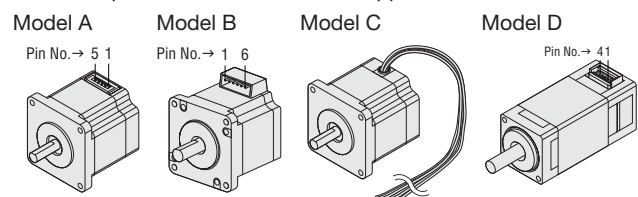

Driver CN2 Pin No.	Model A		Model B		Model C	Model D	
	Pin No.	Color	Pin No.	Color	Color	Pin No.	Color
1	4	Blue	1	Blue	Blue	3	Blue
2	5	Red	3	Red	Red	4	Red
3	—	—	—	—	—	—	—
4	2	Green	6	Green	Green	2	Green
5	1	Black	4	Black	Black	1	Black


● The colors in the table indicate the colors of the lead wires in the separately sold connection cables.

### Note

- The pin arrangement varies depending on the model. It will not rotate normally if the connection is wrong.

## ◇ 5-Phase **CVD** Driver Connection Table

- Motor: 5-Phase **PKP/PK** Series
- Driver: Driver for 5-Phase Stepper Motors

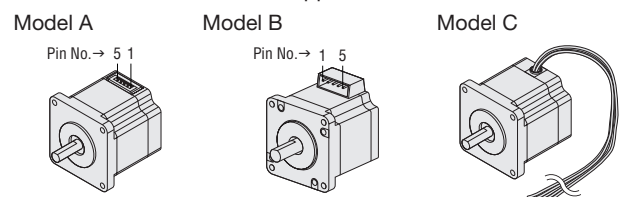

Driver CN2 Pin No.	Model A		Model B		Model C
	Pin No.	Color	Pin No.	Color	Color
1	5	Blue	1	Blue	Blue
2	4	Red	2	Red	Red
3	3	Orange	3	Orange	Orange
4	2	Green	4	Green	Green
5	1	Black	5	Black	Black

● The colors in the table indicate the colors of the lead wires in the separately sold connection cables.

## 2-Phase Motors **PKP**

### Features Product Line

### Product Number Product Line

### Standard Type

### High- Resolution Type

### Flat Type

### SH Geared Type

### CS Geared Type

### Common Specifications

### Inner Wiring of Motor

## 5-Phase Motors **PKP**

### Features Product Line

### Product Number Product Line

### Standard Type

### High- Resolution Type

### TS Geared Type

### Common Specifications

### Motor Pin Arrangement

## Drivers for 2-Phase/5-Phase Motors


### Cables

### Peripheral Equipment

# Cables

## Cable System Configuration Example


### Pulse Input Type Driver

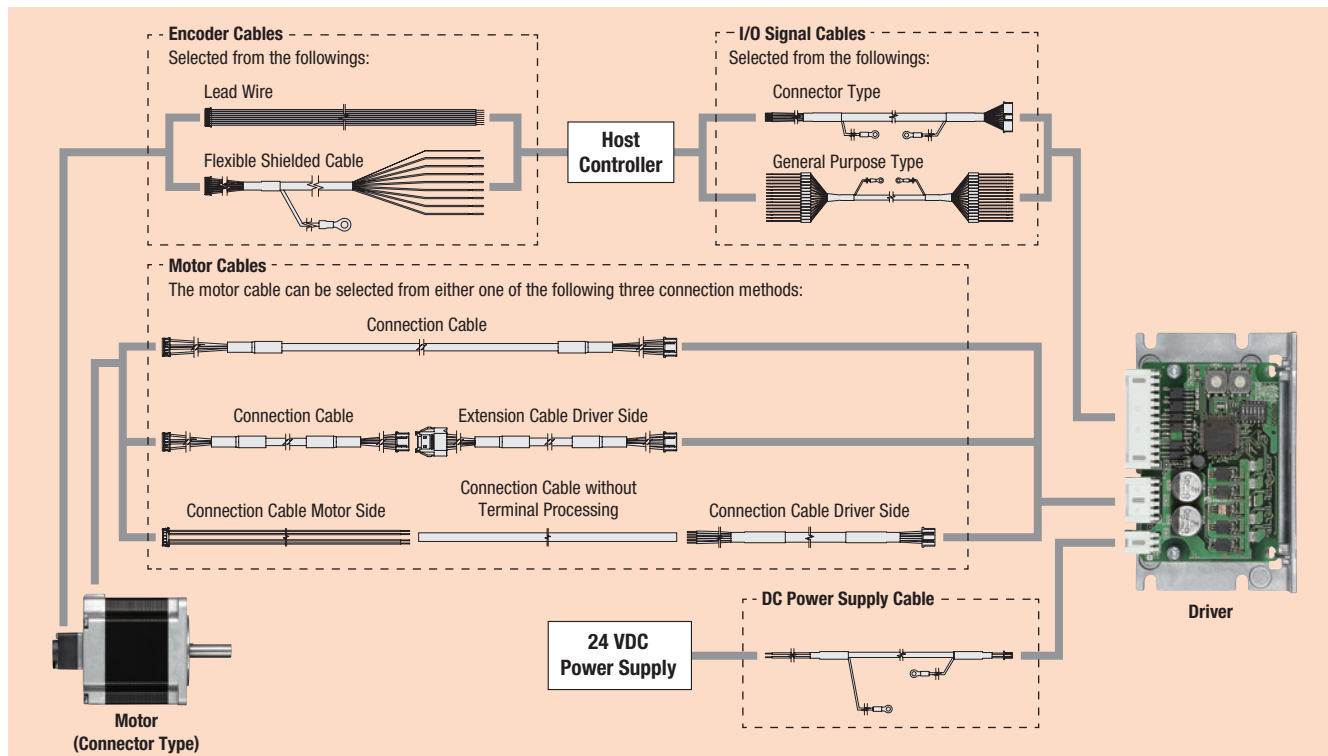

#### Note

- Up to three cables can be used to connect the motor and driver.
- The maximum extension lengths between the motor and driver is shown below.
  - 2-Phase Bipolar Motor and 2-Phase **CVD** Driver: 10 m
  - 2-Phase Unipolar Motor and 2-Phase **CMD** Driver: 2 m
  - 5-Phase Motor and 5-Phase **CVD** Driver: 10 m


### RS-485 Communication Type Driver

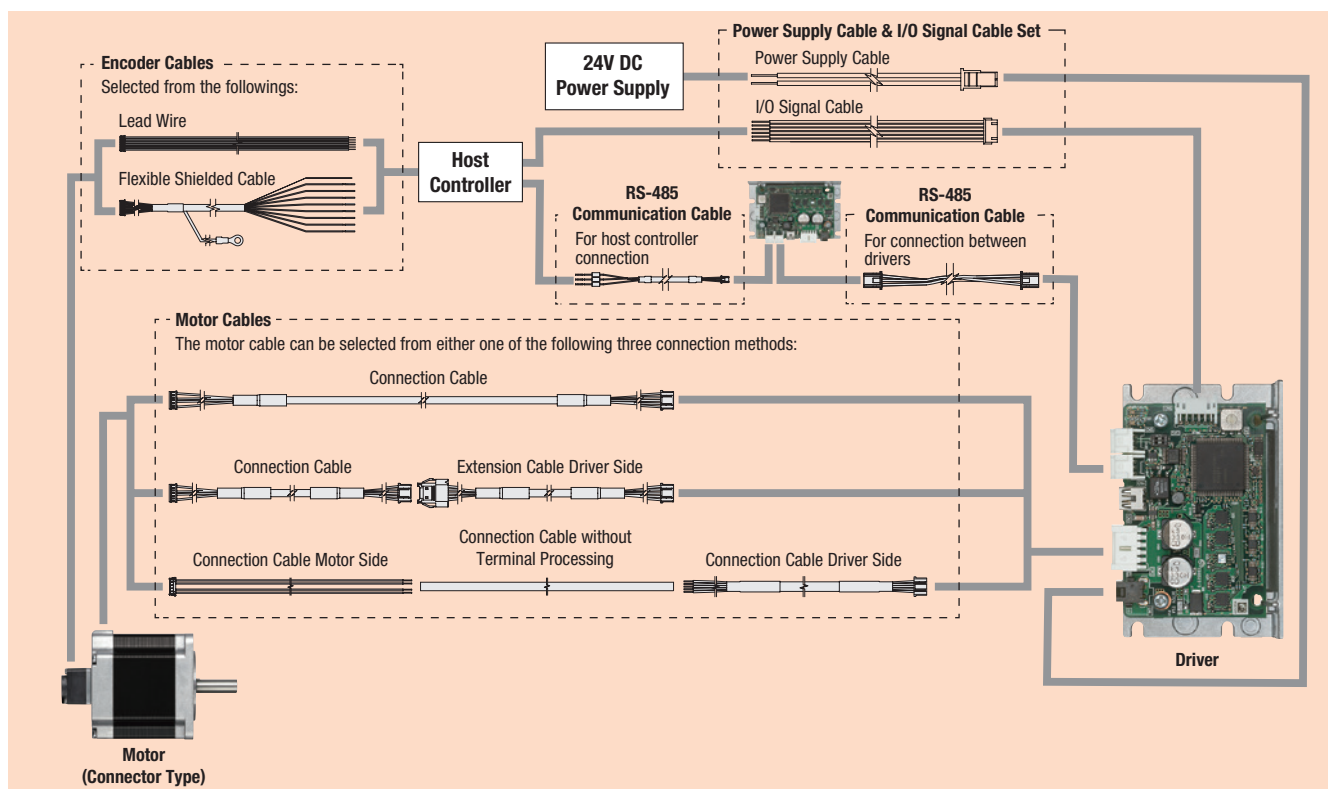

#### Note

- Up to three cables can be used to connect the motor and driver.
- The maximum extension lengths between the motor and driver is 10 m.

## Motor Cables

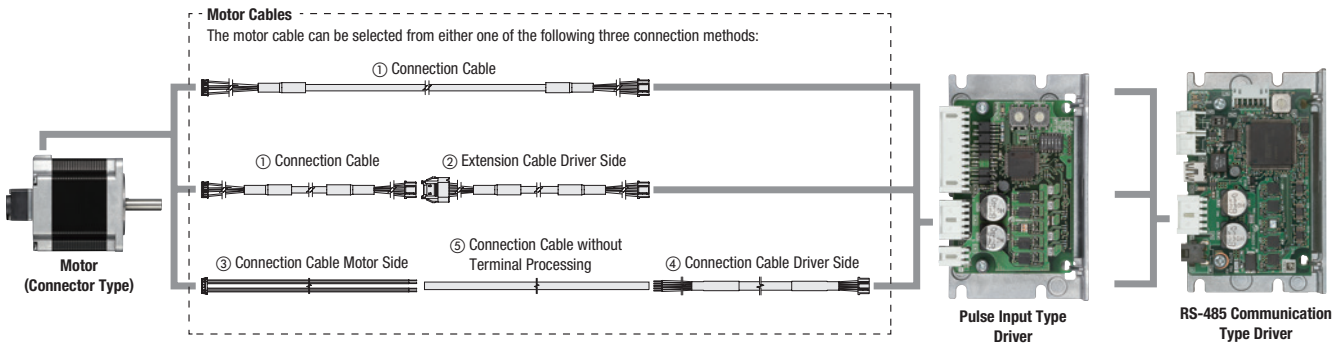

### ① Connection Cables

These cables are used to connect the connector type motor and the driver.


The motor and the driver can be connected directly since these cables have connectors on both ends.

#### Notes on Applicable Products


◇ Two connector shapes are available for the connector type motor.

Select a suitable cable for each connector shape.

Model A



Model B




● Same for the geared motors and motors with encoder.


◇ Connection cables that can be connected to the following motors are not available:

- 2-Phase Unipolar (5 or 6 Lead Wires)
- Model C and Model D motors

Model C



Model D



### ● 2-Phase Frame Size 28 mm Bipolar (4 Lead Wires) Connector Type

◇ Product Line

#### ● Connection Cables

Product Name	Length L [m]
CCM005V2AAF	0.5
CCM010V2AAF	1
CCM015V2AAF	1.5
CCM020V2AAF	2
CCM025V2AAF	2.5
CCM030V2AAF	3
CCM040V2AAF	4
CCM050V2AAF	5
CCM070V2AAF	7
CCM100V2AAF	10


#### ● Flexible Connection Cable

Product Name	Length L [m]
CCM005V2AAR	0.5
CCM010V2AAR	1
CCM015V2AAR	1.5
CCM020V2AAR	2
CCM025V2AAR	2.5
CCM030V2AAR	3
CCM040V2AAR	4
CCM050V2AAR	5
CCM070V2AAR	7
CCM100V2AAR	10

◇ Applicable Products

Motor		Driver	
Connector Type	Frame Size	Pulse Input	RS-485 Communication
Model B	28 mm	<b>CVD215</b>	<b>CVD2</b>

◇ Dimensions (Unit: mm)

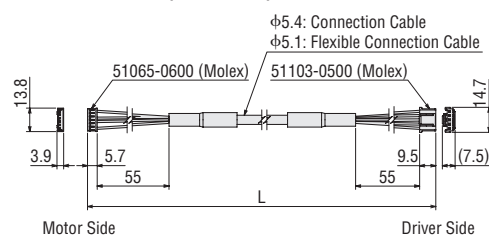

● See page 156 for "Extension Cables Driver Side (CCM□□V5ADFT)" that can be used to extend the connection cable.

### ● 2-Phase Frame Size 35/42 mm Bipolar (4 Lead Wires) Connector Type

◇ Product Line

#### ● Connection Cables

Product Name	Length L [m]
CCM005V2ABF	0.5
CCM010V2ABF	1
CCM015V2ABF	1.5
CCM020V2ABF	2
CCM025V2ABF	2.5
CCM030V2ABF	3
CCM040V2ABF	4
CCM050V2ABF	5
CCM070V2ABF	7
CCM100V2ABF	10


#### ● Flexible Connection Cables

Product Name	Length L [m]
CCM005V2ABR	0.5
CCM010V2ABR	1
CCM015V2ABR	1.5
CCM020V2ABR	2
CCM025V2ABR	2.5
CCM030V2ABR	3
CCM040V2ABR	4
CCM050V2ABR	5
CCM070V2ABR	7
CCM100V2ABR	10

◇ Applicable Products

Motor		Driver	
Connector Type	Frame Size	Pulse Input	RS-485 Communication
Model B	35 mm 42 mm	<b>CVD215</b> <b>CVD223</b>	<b>CVD2</b>

◇ Dimensions (Unit: mm)

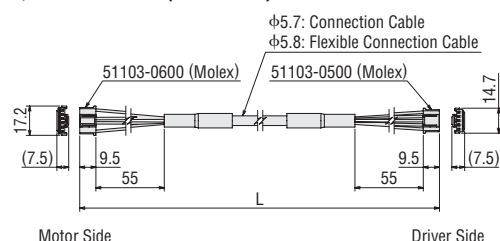

● See page 156 for "Extension Cables Driver Side (CCM□□V5ADFT)" that are used to extend the connection cable.

2-Phase  
Motors  
PKP

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

Flat  
Type

SH Geared  
Type

CS Geared  
Type

Common  
Specifications

Inner  
Wiring  
of Motor

5-Phase  
Motors  
PKP

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

TS Geared  
Type

Common  
Specifications

Motor  
Pin  
Arrangement

Drivers for  
2-Phase/5-Phase  
Motors

Cables

Peripheral  
Equipment

## ● 2-Phase Frame Size 56.4 mm Bipolar (4 Lead Wires) Connector Type

### ◇ Product Line

#### ● Connection Cables

Product Name	Length L [m]
<b>CCM005V2ACF</b>	0.5
<b>CCM010V2ACF</b>	1
<b>CCM015V2ACF</b>	1.5
<b>CCM020V2ACF</b>	2
<b>CCM025V2ACF</b>	2.5
<b>CCM030V2ACF</b>	3
<b>CCM040V2ACF</b>	4
<b>CCM050V2ACF</b>	5
<b>CCM070V2ACF</b>	7
<b>CCM100V2ACF</b>	10

#### ● Flexible Connection Cables


Product Name	Length L [m]
<b>CCM005V2ACR</b>	0.5
<b>CCM010V2ACR</b>	1
<b>CCM015V2ACR</b>	1.5
<b>CCM020V2ACR</b>	2
<b>CCM025V2ACR</b>	2.5
<b>CCM030V2ACR</b>	3
<b>CCM040V2ACR</b>	4
<b>CCM050V2ACR</b>	5
<b>CCM070V2ACR</b>	7
<b>CCM100V2ACR</b>	10

● See page 156 for "Extension Cables Driver Side (**CCM**□□□**V5ADFT**)" that are used to extend the connection cable.

### ◇ Applicable Products

Motor		Driver	
Connector Type	Frame Size	Pulse Input	RS-485 Communication
Model B	56.4 mm	<b>CVD228</b>	<b>CVD2</b>

### ◇ Dimensions (Unit: mm)

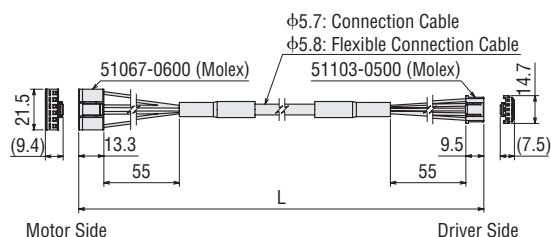

## ● 2-Phase Frame Size 42/50/51/56.4/60 mm Bipolar (4 Lead Wires) Mini-Connector Type

### ◇ Product Line

#### ● Connection Cables

Product Name	Length L [m]
<b>CCM005V2AEF</b>	0.5
<b>CCM010V2AEF</b>	1
<b>CCM015V2AEF</b>	1.5
<b>CCM020V2AEF</b>	2
<b>CCM025V2AEF</b>	2.5
<b>CCM030V2AEF</b>	3
<b>CCM040V2AEF</b>	4
<b>CCM050V2AEF</b>	5
<b>CCM070V2AEF</b>	7
<b>CCM100V2AEF</b>	10

#### ● Flexible Connection Cables


Product Name	Length L [m]
<b>CCM005V2AER</b>	0.5
<b>CCM010V2AER</b>	1
<b>CCM015V2AER</b>	1.5
<b>CCM020V2AER</b>	2
<b>CCM025V2AER</b>	2.5
<b>CCM030V2AER</b>	3
<b>CCM040V2AER</b>	4
<b>CCM050V2AER</b>	5
<b>CCM070V2AER</b>	7
<b>CCM100V2AER</b>	10

● See page 156 for "Extension Cables Driver Side (**CCM**□□□**V5ADFT**)" that are used to extend the connection cable.

### ◇ Applicable Products

Motor		Driver	
Connector Type	Frame Size	Pulse Input	RS-485 Communication
Model A	42 mm	<b>CVD223F</b>	<b>CVD2</b>
	50 mm	<b>CVD228</b>	
	51 mm	<b>CVD223F</b>	
	56.4 mm	<b>CVD228</b>	
	60 mm		

### ◇ Dimensions (Unit: mm)

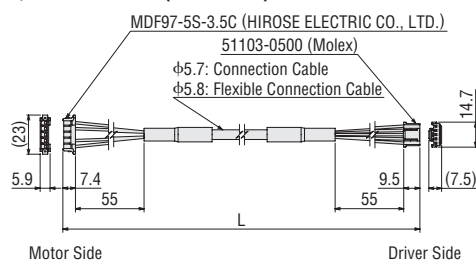

## ● 2-Phase Frame Size 56.4 mm Bipolar (4 Lead Wires) Mini-Connector Type

### ◇ Product Line

#### ● Connection Cables

Product Name	Length L [m]
<b>CCM005V2BEF</b>	0.5
<b>CCM010V2BEF</b>	1
<b>CCM020V2BEF</b>	2
<b>CCM030V2BEF</b>	3
<b>CCM050V2BEF</b>	5

#### ● Flexible Connection Cables


Product Name	Length L [m]
<b>CCM005V2BER</b>	0.5
<b>CCM010V2BER</b>	1
<b>CCM020V2BER</b>	2
<b>CCM030V2BER</b>	3
<b>CCM050V2BER</b>	5

● See page 156 for "Extension Cables Driver Side (**CCM**□□□**V5BFFT**)" that are used to extend the connection cable.

### ◇ Applicable Products

Motor		Driver	
Connector Type	Frame Size	Pulse Input	
Model A	56.4 mm	<b>CVD242</b>	

### ◇ Dimensions (Unit: mm)

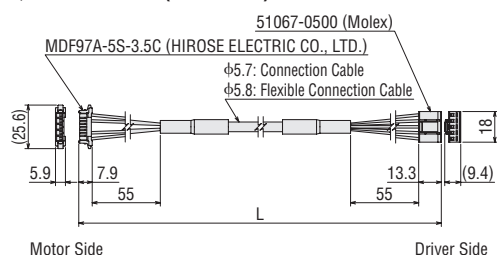

## ● 5-Phase Frame Size 20/28 mm Connector Type

### ◇ Product Line

#### ● Connection Cables

Product Name	Length L [m]
<b>CCM005V5AAF</b>	0.5
<b>CCM010V5AAF</b>	1
<b>CCM015V5AAF</b>	1.5
<b>CCM020V5AAF</b>	2
<b>CCM025V5AAF</b>	2.5
<b>CCM030V5AAF</b>	3
<b>CCM040V5AAF</b>	4
<b>CCM050V5AAF</b>	5
<b>CCM070V5AAF</b>	7
<b>CCM100V5AAF</b>	10

#### ● Flexible Connection Cables


Product Name	Length L [m]
<b>CCM005V5AAR</b>	0.5
<b>CCM010V5AAR</b>	1
<b>CCM015V5AAR</b>	1.5
<b>CCM020V5AAR</b>	2
<b>CCM025V5AAR</b>	2.5
<b>CCM030V5AAR</b>	3
<b>CCM040V5AAR</b>	4
<b>CCM050V5AAR</b>	5
<b>CCM070V5AAR</b>	7
<b>CCM100V5AAR</b>	10

● See page 156 for "Extension Cables Driver Side (**CCM**□□□**V5ADFT**)" that are used to extend the connection cable.

### ◇ Applicable Products

Motor		Driver	
Connector Type	Frame Size	Pulse Input	RS-485 Communication
Model B	20 mm	<b>CVD503</b>	<b>CVD5</b>
	28 mm	<b>CVD512</b>	

### ◇ Dimensions (Unit: mm)

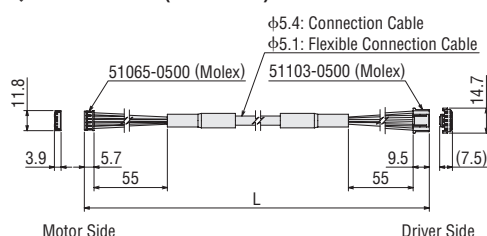

## 5-Phase Frame Size 42/60 mm Mini-Connector Type

### Product Line

#### Connection Cables

Product Name	Length L [m]
CCM005V5AEF	0.5
CCM010V5AEF	1
CCM015V5AEF	1.5
CCM020V5AEF	2
CCM025V5AEF	2.5
CCM030V5AEF	3
CCM040V5AEF	4
CCM050V5AEF	5
CCM070V5AEF	7
CCM100V5AEF	10


#### Flexible Connection Cables

Product Name	Length L [m]
CCM005V5AER	0.5
CCM010V5AER	1
CCM015V5AER	1.5
CCM020V5AER	2
CCM025V5AER	2.5
CCM030V5AER	3
CCM040V5AER	4
CCM050V5AER	5
CCM070V5AER	7
CCM100V5AER	10

### Applicable Products

Motor		Driver	
Connector Type	Frame Size	Pulse Input	RS-485 Communication
Model A	42 mm	<b>CVD518</b>	<b>CVD5</b>
	60 mm	<b>CVD524</b>	

### Dimensions (Unit: mm)

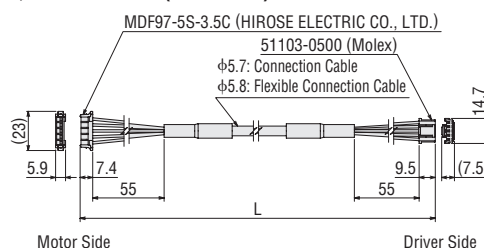

See page 156 for "Extension Cables Driver Side (CCM□□□V5ADFT)" that are used to extend the connection cable.

## 5-Phase Frame Size 42 mm Connector Type

### Product Line

#### Connection Cables

Product Name	Length L [m]
CCM005V5ABF	0.5
CCM010V5ABF	1
CCM015V5ABF	1.5
CCM020V5ABF	2
CCM025V5ABF	2.5
CCM030V5ABF	3
CCM040V5ABF	4
CCM050V5ABF	5
CCM070V5ABF	7
CCM100V5ABF	10


#### Flexible Connection Cables

Product Name	Length L [m]
CCM005V5ABR	0.5
CCM010V5ABR	1
CCM015V5ABR	1.5
CCM020V5ABR	2
CCM025V5ABR	2.5
CCM030V5ABR	3
CCM040V5ABR	4
CCM050V5ABR	5
CCM070V5ABR	7
CCM100V5ABR	10

### Applicable Products

Motor		Driver	
Connector Type	Frame Size	Pulse Input	RS-485 Communication
Model B	42 mm	<b>CVD518</b>	<b>CVD5</b>

### Dimensions (Unit: mm)

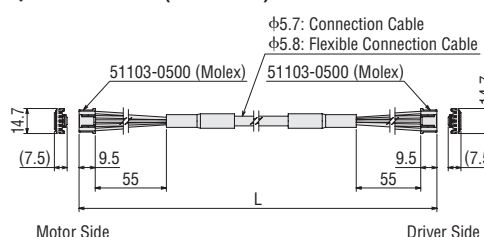

See page 156 for "Extension Cables Driver Side (CCM□□□V5ADFT)" that are used to extend the connection cable.

## 5-Phase Frame Size 56.4/60 mm Mini-Connector Type

### Product Line

#### Connection Cables

Product Name	Length L [m]
CCM005V5BEF	0.5
CCM010V5BEF	1
CCM020V5BEF	2
CCM030V5BEF	3
CCM050V5BEF	5


#### Flexible Connection Cables

Product Name	Length L [m]
CCM005V5BER	0.5
CCM010V5BER	1
CCM020V5BER	2
CCM030V5BER	3
CCM050V5BER	5

### Applicable Products

Motor		Driver	
Connector Type	Frame Size	Pulse Input	RS-485 Communication
Model A	56.4 mm	<b>CVD528</b>	<b>CVD538</b>
	60 mm	<b>CVD538</b>	

### Dimensions (Unit: mm)

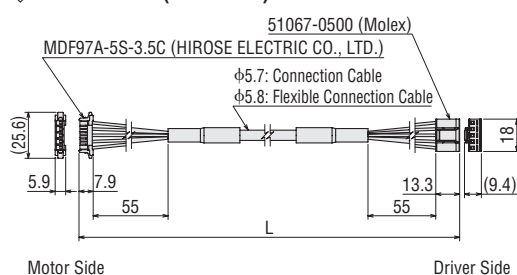

See page 156 for "Extension Cables Driver Side (CCM□□□V5BFFT)" that are used to extend the connection cable.

## 5-Phase Frame Size 60 mm Connector Type

### Product Line

#### Connection Cables

Product Name	Length L [m]
CCM005V5ACF2	0.5
CCM010V5ACF2	1
CCM015V5ACF2	1.5
CCM020V5ACF2	2
CCM025V5ACF2	2.5
CCM030V5ACF2	3
CCM040V5ACF2	4
CCM050V5ACF2	5
CCM070V5ACF2	7
CCM100V5ACF2	10


#### Flexible Connection Cables

Product Name	Length L [m]
CCM005V5ACR2	0.5
CCM010V5ACR2	1
CCM015V5ACR2	1.5
CCM020V5ACR2	2
CCM025V5ACR2	2.5
CCM030V5ACR2	3
CCM040V5ACR2	4
CCM050V5ACR2	5
CCM070V5ACR2	7
CCM100V5ACR2	10

### Applicable Products

Motor		Driver	
Connector Type	Frame Size	Pulse Input	RS-485 Communication
Model B	60 mm	<b>CVD524</b>	<b>CVD5</b>

### Dimensions (Unit: mm)

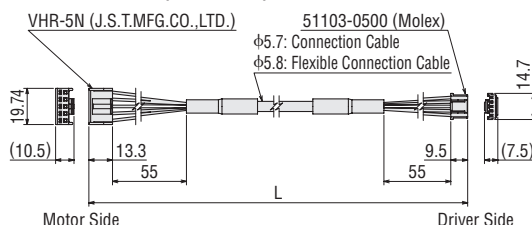

See page 156 for "Extension Cables Driver Side (CCM□□□V5ADFT)" that are used to extend the connection cable.

## 2-Phase Motors PKP

### Features Product Line

### Product Number Product Line

### Standard Type

### High- Resolution Type

### Flat Type

### SH Geared Type

### CS Geared Type

### Common Specifications

### Inner Wiring of Motor

## 5-Phase Motors PKP

### Features Product Line

### Product Number Product Line

### Standard Type

### High- Resolution Type

### TS Geared Type

### Common Specifications

### Motor Pin Arrangement

## Drivers for 2-Phase/5-Phase Motors

## Cables

### Peripheral Equipment



## ② Extension Cables Driver Side

These cables can be used to extend the connection cables.

The cables can connect the connection cable and the driver directly.



### ◇ Product Line

#### ● Extension Cables


Product Name	Applicable Drivers		Length L [m]
	Pulse Input	RS-485 Communication	
<b>CCM005V5ADFT</b>	<b>CVD215, CVD223, CVD223F, CVD228, CVD503, CVD512, CVD518, CVD524</b>	<b>CVD2, CVD5</b>	0.5
<b>CCM010V5ADFT</b>			1
<b>CCM015V5ADFT</b>			1.5
<b>CCM020V5ADFT</b>			2
<b>CCM025V5ADFT</b>			2.5
<b>CCM030V5ADFT</b>			3
<b>CCM040V5ADFT</b>			4
<b>CCM050V5ADFT</b>			5
<b>CCM070V5ADFT</b>			7
<b>CCM090V5ADFT</b>			9
<b>CCM005V5BFFT</b>	<b>CVD242, CVD528, CVD538</b>	—	0.5
<b>CCM010V5BFFT</b>			1
<b>CCM020V5BFFT</b>			2
<b>CCM030V5BFFT</b>			3
<b>CCM040V5BFFT</b>			4

#### ● Flexible Extension Cables


Product Name	Applicable Drivers		Length L [m]
	Pulse Input	RS-485 Communication	
<b>CCM005V5ADRT</b>	<b>CVD215, CVD223, CVD223F, CVD228, CVD503, CVD512, CVD518, CVD524</b>	<b>CVD2, CVD5</b>	0.5
<b>CCM010V5ADRT</b>			1
<b>CCM015V5ADRT</b>			1.5
<b>CCM020V5ADRT</b>			2
<b>CCM025V5ADRT</b>			2.5
<b>CCM030V5ADRT</b>			3
<b>CCM040V5ADRT</b>			4
<b>CCM050V5ADRT</b>			5
<b>CCM070V5ADRT</b>			7
<b>CCM090V5ADRT</b>			9
<b>CCM005V5BFRT</b>	<b>CVD242, CVD528, CVD538</b>	—	0.5
<b>CCM010V5BFRT</b>			1
<b>CCM020V5BFRT</b>			2
<b>CCM030V5BFRT</b>			3
<b>CCM040V5BFRT</b>			4

### ◇ Dimensions (Unit: mm)

Product Name: **CCM□□□V5ADFT, CCM□□□V5ADRT**

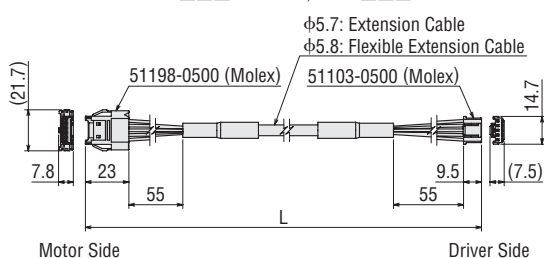

Product Name: **CCM□□□V5BFFT, CCM□□□V5BFRT**

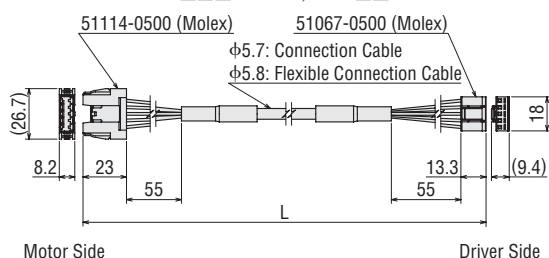

### ③ Connection Cables Motor Side



These cables have a connector on motor side.  
Refer to pages on motor specifications and dimensions for "Applicable Motors" and "Cable Dimensions."

#### ◇ Product Line (For 2-Phase Bipolar Motors)

Product Name	Length L [m]
<b>LC2B06A</b>	0.6
<b>LC2B06B</b>	0.6
<b>LC2B06C</b>	0.6
<b>LC2B06E</b>	0.6

#### ◇ Product Line (For 2-Phase Unipolar Motors)

Product Name	Length L [m]
<b>LC2U06A</b>	0.6
<b>LC2U10A</b>	1
<b>LC2U06B</b>	0.6
<b>LC2U10B</b>	1
<b>LC2U06C</b>	0.6
<b>LC2U10C</b>	1
<b>LC2U06E</b>	0.6

#### ◇ Product Line (For 5-Phase Motors)

Product Name	Length L [m]
<b>LC5N06A</b>	0.6
<b>LC5N10A</b>	1
<b>LC5N06B</b>	0.6
<b>LC5N10B</b>	1
<b>LC5N06C2</b>	0.6
<b>LC5N10C2</b>	1
<b>LC5N06E</b>	0.6

### ④ Connection Cables Driver Side



These cables are used to connect the motor and the driver.

These cables have a connector on driver side.

- Cables for connecting bipolar driver for 2-phase stepper motor (product name: **CVD2~**) are not available. The lead wire type driver cable set which is a set of cables for I/O signals, motor, and DC power supply (→ page 162) is available. (Pulse Input Type)

#### ◇ Product Line

Product Name	Applicable Driver	Length L [m]	Type	Conductor AWG
<b>CC005N1</b>	Driver for 5-Phase Stepper Motors* (Product Name: <b>CVD5~</b> )	0.5	Not Flexible	22 (0.3 mm <sup>2</sup> )
<b>CC010N1</b>		1		
<b>CC005N1R</b>		0.5	Flexible	22 (0.3 mm <sup>2</sup> )
<b>CC010N1R</b>		1		

\*Excluding **CVD528** and **CVD538**.

- For dimensions, please see the Oriental Motor website.

### ⑤ Connection Cables without Terminal Processing



These cables are used to extend the connection between the 5-Phase or 2-Phase bipolar motors and the drivers. When wiring the motor and the driver, keep a maximum distance of 10 m.

#### ◇ Product Line

Product Name	Cable Type	Length L [m]	Conductor AWG	Finished Diameter [mm]
<b>CC05PK5</b>	Connection Cable for Stand Motor	5	22 (0.3 mm <sup>2</sup> )	φ7.2
<b>CC10PK5</b>		10		

- Cable Core Structure: 5 cores (blue, red, orange, green, black)
- Cable Rated Temperature: 105°C
- Cable Sheath: Oil-resistant, heat-resistant, non-transferable vinyl
- Applicable Products:
  - These cables can be used for 2-phase stepper motors with a motor rated current of 2.8 A or lower.
  - These cables can be used for 5-phase stepper motors with a motor rated current of 2.4 A or lower.
- The flexible connection cables can only be used for 5-phase stepper motors.
- For dimensions, please see the Oriental Motor website.

2-Phase  
Motors  
PKP

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

Flat  
Type

**SH** Geared  
Type

**CS** Geared  
Type

Common  
Specifications

Inner  
Wiring  
of Motor

5-Phase  
Motors  
PKP

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

**TS** Geared  
Type

Common  
Specifications

Motor  
Pin  
Arrangement


Drivers for  
2-Phase/5-Phase  
Motors

Cables


Peripheral  
Equipment



## Encoder Connection Cable

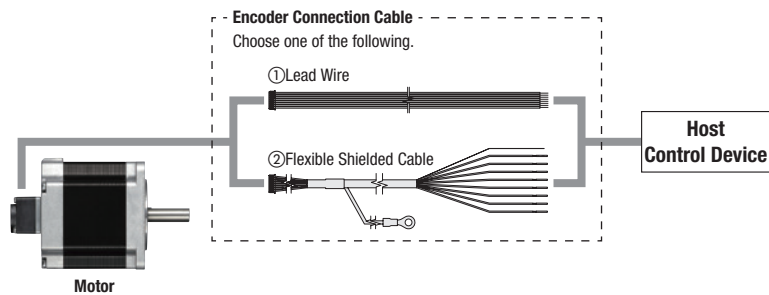

### ① Lead Wire



An encoder connection cable with an encoder connector on the motor end. Check the specifications and dimensions page of each motor for the cable dimensions.


#### ◇ Product Line

Product Name	Applicable Motor	Length L [m]	Conductor AWG
<b>LCE05A-006</b>	With encoder Voltage output type	0.6	26 (0.13 mm <sup>2</sup> )
<b>LCE08A-006</b>	With encoder Line driver output type		


- A voltage output type cable is also available. For details, please contact your nearest Oriental Motor sales office.
- For dimensions, please see the Oriental Motor website.

#### ◇ Dimensions (Unit: mm)


##### ● LCE05A-006

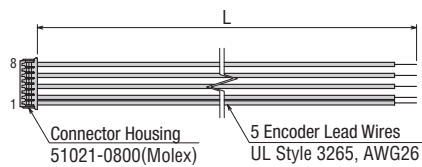

##### ● LCE08A-006

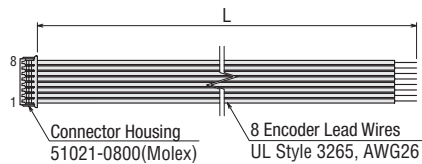

### ② Flexible Shielded Cable




A flexible shielded cable with an encoder connector on the motor end. Features an exposed shielded ground wire for easy grounding.

#### ◇ Product Line

Product Name	Applicable Motor	Length L [m]	Conductor AWG
<b>CC010E1R</b>	With encoder Line driver output type	1	26 (0.13 mm <sup>2</sup> )
<b>CC020E1R</b>		2	
<b>CC030E1R</b>		3	


- For dimensions, please see the Oriental Motor website.

## Electromagnetic Brake Connection Cable

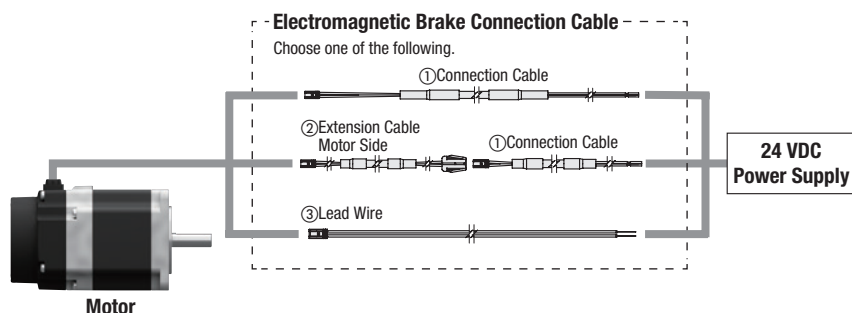

### ① Connection Cable

A connection cable with an electromagnetic brake connector on the motor end.  
Can be used on electromagnetic brakes with the connector connection method.



#### ◇ Product Line


##### ● Connection Cables

Product Name	Length L [m]
<b>CCB005VYAF</b>	0.5
<b>CCB010VYAF</b>	1
<b>CCB015VYAF</b>	1.5
<b>CCB020VYAF</b>	2
<b>CCB025VYAF</b>	2.5
<b>CCB030VYAF</b>	3
<b>CCB040VYAF</b>	4
<b>CCB050VYAF</b>	5
<b>CCB070VYAF</b>	7
<b>CCB100VYAF</b>	10

##### ● Flexible Connection Cables

Product Name	Length L [m]
<b>CCB005VYAR</b>	0.5
<b>CCB010VYAR</b>	1
<b>CCB015VYAR</b>	1.5
<b>CCB020VYAR</b>	2
<b>CCB025VYAR</b>	2.5
<b>CCB030VYAR</b>	3
<b>CCB040VYAR</b>	4
<b>CCB050VYAR</b>	5
<b>CCB070VYAR</b>	7
<b>CCB100VYAR</b>	10

#### ◇ Dimensions (Unit: mm)

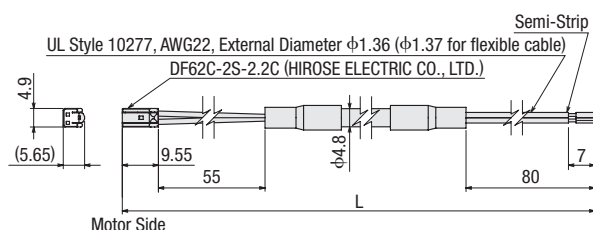

### ② Extension Cable

These cables can be used to extend connection cables.  
They can be directly connected between the connection cable and the electromagnetic brake.



#### ◇ Product Line


##### ● Extension Cable

Product Name	Length L [m]
<b>CCB005VBFAF</b>	0.5
<b>CCB010VBFAF</b>	1
<b>CCB015VBFAF</b>	1.5
<b>CCB020VBFAF</b>	2
<b>CCB025VBFAF</b>	2.5
<b>CCB030VBFAF</b>	3
<b>CCB040VBFAF</b>	4
<b>CCB050VBFAF</b>	5
<b>CCB070VBFAF</b>	7
<b>CCB090VBFAF</b>	9


##### ● Flexible Extension Cable

Product Name	Length L [m]
<b>CCB005VBART</b>	0.5
<b>CCB010VBART</b>	1
<b>CCB015VBART</b>	1.5
<b>CCB020VBART</b>	2
<b>CCB025VBART</b>	2.5
<b>CCB030VBART</b>	3
<b>CCB040VBART</b>	4
<b>CCB050VBART</b>	5
<b>CCB070VBART</b>	7
<b>CCB090VBART</b>	9

#### ◇ Dimensions (Unit: mm)

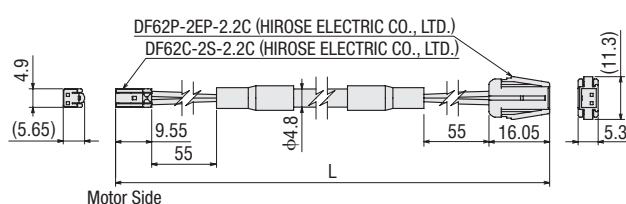

### ③ Lead Wire



#### ◇ Product Line

Product Name	Applicable Motor	Length L [m]	Conductor AWG
<b>LCM02A-006</b>	<b>PKP24□M2</b>	0.6	22
<b>LCM02A-010</b>	<b>PKP26□M2</b>	1	(0.3 mm <sup>2</sup> )

An electromagnetic brake connection cable with an electromagnetic brake connector on the motor end. Can be used on electromagnetic brakes with the connector connection method. Check the specifications and dimensions page of each motor for the cable dimensions.

2-Phase  
Motors  
**PKP**

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

Flat  
Type

**SH** Geared  
Type

**CS** Geared  
Type

Common  
Specifications

Inner  
Wiring  
of Motor

5-Phase  
Motors  
**PKP**

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

**TS** Geared  
Type

Common  
Specifications


Motor  
Pin  
Arrangement

Drivers for  
2-Phase/5-Phase  
Motors

Cables

Peripheral  
Equipment

## Cable for I/O Signal (for pulse input type)

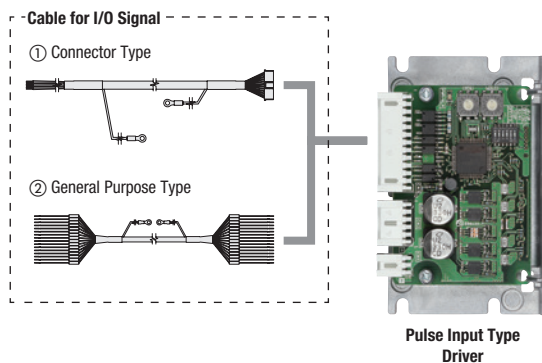

### ① Connector Type



These cables are used to connect the host system and the driver.  
A shielded cable is used, and both ends of the cable are equipped with ground wires for easy grounding.

#### ◆ Product Line

Product Name	Applicable Drivers	Length L [m]	Conductor AWG	List Price
<b>CC12D005-2</b>	Bipolar Driver for 2-Phase Stepper Motors (Product name: <b>CVD2</b> ~) Driver for 5-Phase Stepper Motors (Product name: <b>CVD5</b> ~)	0.5	24 (0.2 mm <sup>2</sup> )	
<b>CC12D010-2</b>		1		
<b>CC12D015-2</b>		1.5		
<b>CC12D020-2</b>		2		

● For dimensions, please see the Oriental Motor website.

### ② General Purpose Type




These cables are used to connect the host system and the driver.  
Both ends are unbundled.  
A shielded cable is used, and both ends of the cable are equipped with ground wires for easy grounding.

#### ◆ Product Line


Product Name	Length L [m]	Number of Lead Wire Cores	Outer Diameter D [mm]	AWG	List Price
CC06D005B-1	0.5	6	φ5.4	24 (0.2 mm <sup>2</sup> )	
CC06D010B-1	1				
CC06D015B-1	1.5				
CC06D020B-1	2				
CC10D005B-1	0.5	10	φ6.7		
CC10D010B-1	1				
CC10D015B-1	1.5				
CC10D020B-1	2				
CC12D005B-1	0.5	12	φ7.5		
CC12D010B-1	1				
CC12D015B-1	1.5				
CC12D020B-1	2				

● For dimensions, please see the Oriental Motor website.

## ■ Cable for DC Power Supply (for pulse input type)



Pulse Input Type  
Driver



These cables are used to connect the power supply and the driver.

A shielded cable is used, and both ends of the cable are equipped with ground wires for easy grounding.

### ◆ Product Line

Product Name	Applicable Drivers	Length L [m]	Conductor AWG
<b>CC02D005-2</b>	<b>CVD205, CVD206, CVD215, CVD223, CVD228, CVD503, CVD507, CVD512, CVD514, CVD518, CVD524, CMD2</b>	0.5	22 (0.3 mm <sup>2</sup> )
<b>CC02D010-2</b>		1	
<b>CC02D015-2</b>		1.5	
<b>CC02D020-2</b>		2	
<b>CC02D005-4</b>	<b>CVD242, CVD245, CVD528, CVD538</b>	0.5	18 (0.87 mm <sup>2</sup> )
<b>CC02D010-4</b>		1	
<b>CC02D020-4</b>		2	

● For dimensions, please see the Oriental Motor website.

2-Phase  
Motors  
**PKP**

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

Flat  
Type

**SH** Geared  
Type

**CS** Geared  
Type

Common  
Specifications

Inner  
Wiring  
of Motor

5-Phase  
Motors  
**PKP**

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

**TS** Geared  
Type

Common  
Specifications


Motor  
Pin  
Arrangement

Drivers for  
2-Phase/5-Phase  
Motors

Cables

Peripheral  
Equipment

## Driver Connection Cable Set (for pulse input type)

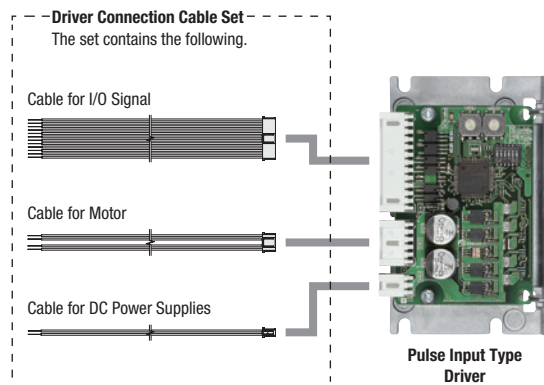

The connection cables to connect the motor to the driver, for the I/O signal, and for the DC power supply, bundled in a set. There are connectors on the driver end.



### Product Line

Product Name	Applicable Drivers	Connector Name	Connector Product Name	Length L1	Length L2	Conductor AWG
<b>LCS04SD5</b>	<b>CVD503, CVD507 CVD512, CVD514 CVD518, CVD524</b>	For Motor	51103-0500	0.6 m	10 mm	22 (0.3 mm <sup>2</sup> )
		For Power Supply	51103-0200			
		For I/O Signal	51103-1200			
<b>LCS05SD5</b>	<b>CVD528, CVD538</b>	For Motor	51067-0500			20 (0.5 mm <sup>2</sup> )
		For Power Supply	51067-0200			22 (0.3 mm <sup>2</sup> )
		For I/O Signal	51103-1200			
<b>LCS01CVK2</b>	<b>CVD205, CVD206 CVD215, CVD223 CVD228</b>	For Motor	51103-0500			22 (0.3 mm <sup>2</sup> )
		For Power Supply	51103-0200			
		For I/O Signal	51103-1200			20 (0.5 mm <sup>2</sup> )
<b>LCS02CVK2</b>	<b>CVD242, CVD245</b>	For Motor	51067-0500			
		For Power Supply	51067-0200			
		For I/O Signal	51103-1200			22 (0.3 mm <sup>2</sup> )

● The applicable driver product names are listed such that the product names are distinguishable.

### Connector Arrangement

#### ◇ For Motor

##### ● LCS0□SD5

Pin No.	Wire Color
1	Blue
2	Red
3	Orange
4	Green
5	Black

##### ● LCS0□CVK2


Pin No.	Wire Color
1	Blue
2	Red
3	—
4	Green
5	Black

#### ◇ For I/O Signal


##### ● Common to All Cables

Pin No.	Wire Color
1	Brown
2	Red
3	Orange
4	Yellow
5	Green
6	Blue
7	Purple
8	Gray
9	White
10	Black
11	Brown
12	Red

### Dimensions

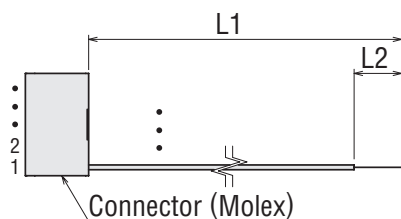

## Power Supply Cable/I/O Signal Cable Set (RS-485 communication type)

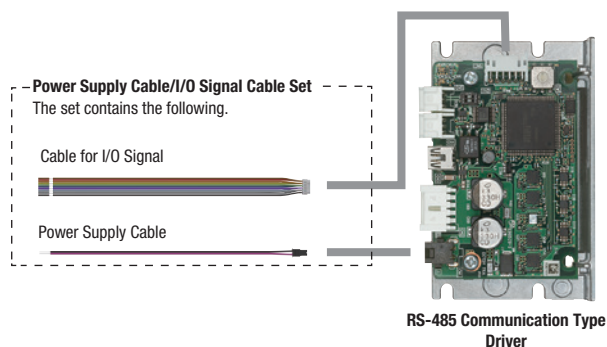


Power supply cables are used to connect the driver and the DC power supply.  
I/O signal cables are used to connect the driver and the host control device.  
A power supply cable and I/O signal cable come as a set.

### Product Line


Product Name	Length L [m]
<b>LHS003CC</b>	0.3
<b>LHS010CC</b>	1

### Dimensions (Unit: mm)


#### Power Supply Cable



#### Cable for I/O Signal



## RS-485 Communication Cable (RS-485 communication type)

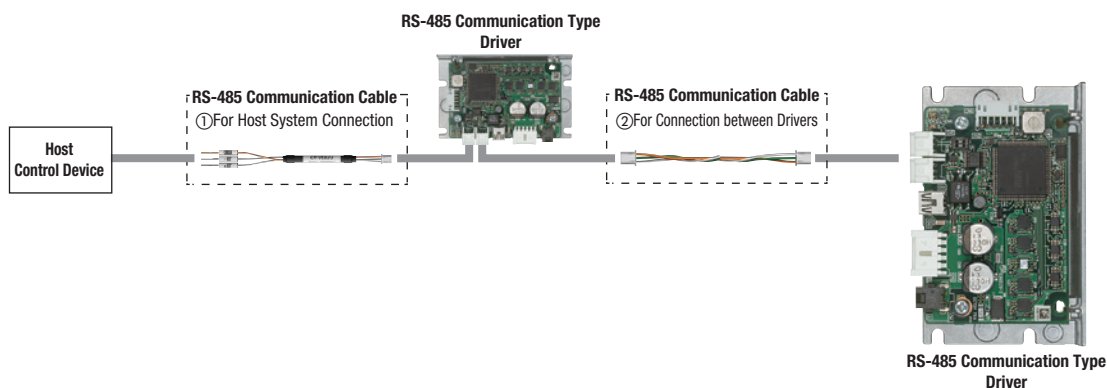


### ① For Host System Connection

These cables are used to connect the driver and the host control device.

#### Product Line

Product Name	Length L [m]
<b>CC030-R5</b>	3

#### Dimensions (Unit: mm)

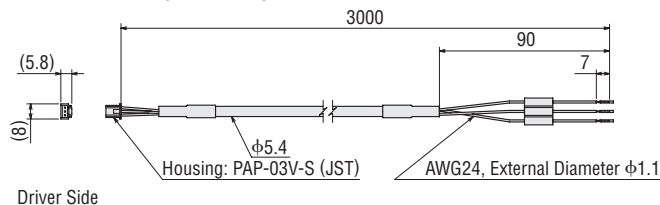


### ② For Connection between Drivers

These cables are used to connect between drivers.

#### Product Line

Product Name	Length L [m]
<b>LH0015-RWN</b>	0.15

#### Dimensions (Unit: mm)

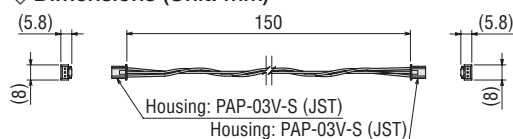

2-Phase  
Motors  
**PKP**

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

Flat  
Type

**SH** Geared  
Type

**CS** Geared  
Type

Common  
Specifications

Inner  
Wiring  
of Motor

5-Phase  
Motors  
**PKP**

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

**TS** Geared  
Type

Common  
Specifications

Motor  
Pin  
Arrangement

Drivers for  
2-Phase/5-Phase  
Motors

**Cables**

Peripheral  
Equipment

# Peripheral Equipment (Sold separately)

## Motor Connector Set

This is a set of connector housings and contacts compatible with connector type (model B) motors.  
Use this set if extra housings and contacts are necessary, although they are included with the products.


### Product Line

Product Name	Applicable Products
<b>CS2U30A</b>	<b>PKP223, PKP225, PKP223M, PKP225M</b>
<b>CS2U30B</b>	<b>PKP233, PKP235, PKP243, PKP244, PKP245, PKP246, PKP243M, PKP244M</b>
<b>CS5N30A</b>	<b>PK513, PKP523, PKP525</b>
<b>CS5N30B</b>	<b>PKP544, PKP546, PKP544M, PKP546M</b>
<b>CS5N30C2</b>	<b>PKP564FM, PKP566FM, PKP569FM</b>

- Each package contains enough housings and contacts for 30 motors. Please order in units of 1 package.  
The list price shows the price of 1 package.

#### Note

- A crimp tool is not included.  
Please prepare separately.

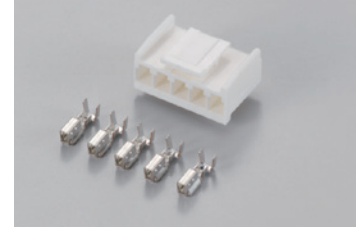

This photograph shows **CS5N30B**.

## Clean Dampers

These mechanical dampers are effective for suppressing stepper motor vibration and improving high-speed performance.  
They consist of an inertial load and silicon gel sealed inside a plastic case.



### Product Line

- Exclusively for the double shaft type.

Product Name	Inertia [kgm <sup>2</sup> ]	Mass [g]	Motor Frame Size	Applicable Products
<b>D4CL-5.0F</b>	$34 \times 10^{-7}$	24	28 mm 35 mm 42 mm	<b>PKP223, PKP225, PKP523, PKP525 PKP233, PKP235 PKP243, PKP244, PKP543, PKP544 PKP245, PKP246, PKP545, PKP546</b>
<b>D6CL-6.3F</b>	$140 \times 10^{-7}$	62	50 mm	<b>PKP254, PKP256, PKP258</b>
<b>D6CL-8.0F</b>	$140 \times 10^{-7}$	61	56.4 mm 60 mm	<b>PKP264, PKP266, PKP268 PK264, PK266, PKP564, PKP566 PK267, PK269, PKP568, PKP569</b>
<b>D9CL-14F</b>	$870 \times 10^{-7}$	105	85 mm 90 mm	<b>PKP296, PKP299, PKP2913 PK296, PK596, PK599, PK5913</b>

Temperature environment: -20 - +80°C

## Regeneration Unit

Regeneration Unit exclusively for DC power supply input products.  
By connecting the Regeneration Unit, the voltage rise caused by the regenerative power of motor can be suppressed.



### Product Line

Product Name	Input Voltage
<b>RG4-K</b>	24 VDC
<b>RG4-N</b>	48 VDC

# Mounting Brackets for Circuit Products

This bracket is for installation on a DIN rail.

<MADP07 Application Example>



●Product Line

Material: SPCC

Product Name	Applicable Drivers	Surface Treatment
MADP03	RG4-□	Electroless nickel plating
MADP07	CVD□□□BR-K	
	CVD□□□B-K	
	CVD□BR-KR	
MADP01S1	CVD□B-KR	
	CVD□□□-K	

## Driver Cover

This is a protection cover to prevent contact with the circuit board.  
Available for the right angle type driver with an installation plate.

<Application Example>



●Product Line

Material: Resin

Product Name	Applicable Drivers
PADC-CVD2	CVD□□□BR-K
	CVD□BR-KR

2-Phase  
Motors  
PKP

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

Flat  
Type

SH Geared  
Type

CS Geared  
Type

Common  
Specifications

Inner  
Wiring  
of Motor

5-Phase  
Motors  
PKP

Features  
Product  
Line

Product  
Number  
Product Line

Standard  
Type

High-  
Resolution  
Type

TS Geared  
Type

Common  
Specifications

Motor  
Pin  
Arrangement

Drivers for  
2-Phase/5-Phase  
Motors

Cables

Peripheral  
Equipment







# ***Orientalmotor***

These products are manufactured at plants certified with the international standards **ISO 9001** (for quality assurance) and **ISO 14001** for systems of environmental management).

Specifications are subject to change without notice. This catalogue was published in June 2024.

## **ORIENTAL MOTOR (EUROPA) GmbH**

### **European Headquarters**

Schießstraße 44  
40549 Düsseldorf, Germany  
Tel: 0211 5206700 Fax: 0211 52067099

### **Spanish Office**

Ronda de Poniente 2, Ed. 12, 2ª planta  
28109 Tres Cantos (Madrid), Spain  
Tel: +34 919 61 06 76

## **ORIENTAL MOTOR (UK) LTD.**

### **UK Headquarters**

Unit 5, Faraday Office Park,  
Rankine Road, Basingstoke,  
Hampshire RG24 8AH, U.K.  
Tel: +44 1256 347090 Fax: +44 1256 347099

## **ORIENTAL MOTOR ITALIA s.r.l.**

### **Italy Headquarters**

Via XXV Aprile 5  
20016 Pero (MI), Italy  
Tel: +39 2 93906346 Fax: +39 2 93906348

## **ORIENTAL MOTOR (FRANCE) SARL**

### **France Headquarters**

56, Rue des Hautes Pâtures  
92000 Nanterre, France  
Tel: +33 1 47 86 97 50 Fax: +33 1 47 82 45 16

### **Customer Service Center**

(Support in German & English)

**00800 22 55 66 22\***

Mon - Thu: 08:00 - 16:30 CET

Friday: 08:00 - 15:00 CET

\*Free Call Europe

**info@orientalmotor.de**

