

550 PRO M

Tappeto Modulare 550 PRO M, H=8,7 K330

Modular Belt Series 550 PRO M, H=8,7 K330 / Modulare Mattenkette 550 PRO M, H=8,7 K330

CODE STRUCTURE GUIDE (Example)

Backflex radius min.: 15 mm

5228	30	9330	C
Series	*Material	Width	Version

 10 feet 3.048 m	 pg. 321/322	 pg. 162	 pg. 651>661
240 links			

MAGNETIC SYSTEM


550 PRO FT & PRO M

SAMPLE BOX

Art.-Nr. 5227018888A

Pin Sphere®
AUTOLOCK

- Easier installation • Quicker maintenance
- 100% interchangeable

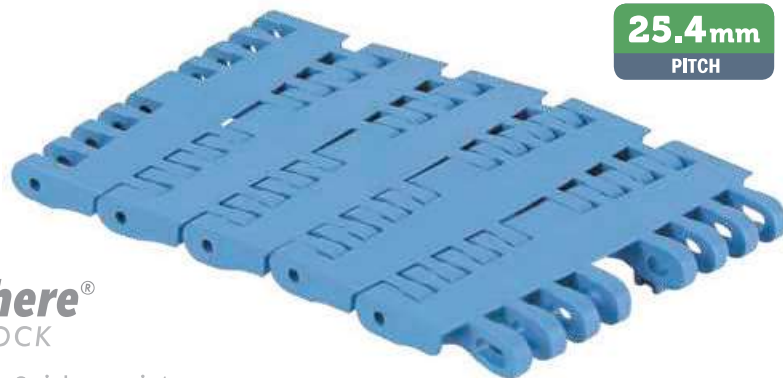25.4mm
PITCH

Metric Size

*Material

LFA - Code 01

Low friction Acetal

Easy Delivery

Max w. load: 2500 N
 Weight: 8,2 kg/m²
 Temp. range dry: -40÷80 °C
 Temp. range wet: -40÷65 °C
 Pin material: Ferritic
 Stainless Steel

MX - Code 03

Performance PBT

Max w. load: 2000 N
 Weight: 8,0 kg/m²
 Temp. range dry: -40÷120 °C
 Temp. range wet: -40÷60 °C
 Pin material: Ferritic
 Stainless Steel


PFX - Code 30

Extra performance PBT

Max w. load: 2000 N
 Weight: 8,0 kg/m²
 Temp. range dry: -40÷120 °C
 Temp. range wet: -40÷60 °C
 Pin material: Ferritic
 Stainless Steel

THE BEST CHOICE FOR
 DRY RUNNING APPLICATIONS

Version C - With 2 Positioner

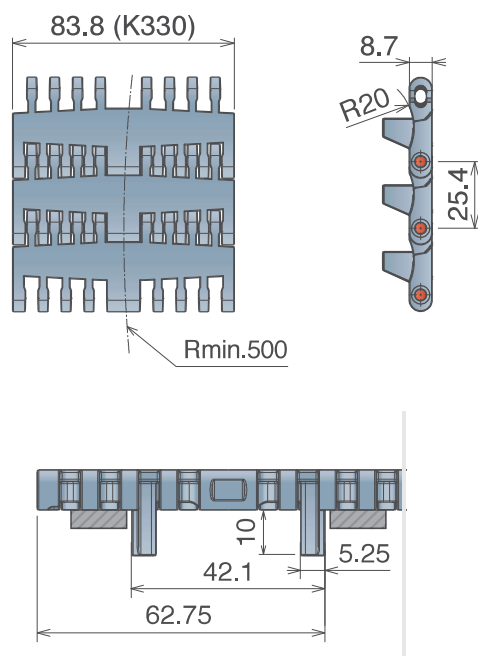

Advantages:

- Optimized product support
- Superior flatness
- Low wear
- Bi-directional

Version C - With 2 Positioners

Series	Material	Width	Version
5228	*	9330	C

550 PRO FT & 550 PRO FT

The perfect combination

- Same height between guide and center sprockets (S Dimension)
- Same speed for curved and straight
- Unique sprocket for curved and straight

Layout with 550 Pro M and 550 PRO FT

